

K5 Software Correlator Manual

T.KONDO

revised on December 21, 2019

T. Kondo

Contents

1 Installation of the package	4
1.1 Installation from an archive file	4
1.2 Installation step by step	4
1.3 Environment variables	5
1.4 Directory structure after installation	6
1.5 Set up your environment	7
2 Software programs list	8
2.1 A-priori calculation	8
2.2 Correlation processing	8
2.3 Data check	8
2.4 Data Format Conversion	8
3 A-priori calculation software	10
3.1 apri_calc	10
3.1.1 How to execute	10
3.1.2 Examples (monitoring schedule)	14
3.1.3 Examples (in case of K5/VSSP)	17
3.1.4 Example (in case of VDIF Format Data)	21
3.1.5 Example (in case of Mark-5B format Data)	22
3.1.6 Example (in case of VSSP format for X station and VDIF format Y station)	23
3.1.7 Example (in case of VDIF format for X and Y stations, but multi-thread data consisting of single-CH/thread data for Y station)	24
3.2 skdchk	26
3.2.1 How to execute	27
3.2.2 Examples	27
4 Correlation software	29
4.1 fx_cor, fx_cor_new, cor, cor_new	29
4.1.1 How to execute	29
4.1.2 Example: “cor”	34
4.1.3 Example: “fx_cor_new” (Mark5B data)	36
4.2 fx_cor_all, fx_cor_all_new, cor_all, cor_all_new	39
4.2.1 How to execute	39
4.3 sdelay	41
4.3.1 How to execute	41
4.3.2 Example	42
4.3.3 Output file format	49
4.4 cor_mon	50
4.4.1 How to execute	50
4.4.2 Example	50

5 Data check utilities	52
5.1 oscillo	52
5.1.1 How to execute	52
5.1.2 Example	52
5.2 speana	52
5.2.1 How to execute	52
5.2.2 Example	53
5.3 g_speana	54
5.3.1 How to execute	54
5.3.2 Example	55
5.4 datachk	56
5.4.1 How to execute	56
5.4.2 Summary file	57
5.4.3 Error log file	57
5.5 vdifcheck	58
5.5.1 How to execute	58
5.5.2 Example	58
5.6 m5check	59
5.6.1 How to execute	59
5.6.2 Examples	59
6 Data format conversion	61
6.1 k5tom5b	61
6.1.1 How to execute	61
6.1.2 Example	61
6.2 k5tom5	62
6.2.1 How to execute	62
6.2.2 Examples	63
6.3 k5tovdif	66
6.3.1 How to execute	66
6.4 ads2k5	67
6.4.1 How to execute	67
6.5 m5btok5	68
6.5.1 How to execute	68
6.6 m5tok5	69
6.6.1 How to execute	69
6.7 vdif2k5	71
6.7.1 How to execute	71
6.8 vdif2m5b	72
6.8.1 How to execute	72
7 Actual correlation processing	73
7.1 Fringe search	73
7.2 Processing all scans	78
7.3 Correlation processing for a variety of data formats (VDIF, Mark5B, ADS, OCTAD)	78
8 Update history	79
A A-priori file format	80
B K5 software correlator output format (Format 7)	89
C KSP correlator output format including extension	91
C.1 Correlation data format: header record (HD)	92
C.2 Correlation data file format (in case of CRSMODE=“F”): correlation data by unit (UD)	94
C.3 Correlation data file format (in case that CRSMODE is not “F”): correlation data by unit (UD)	97

D VLBI data format	99
D.1 Type of data format	99
D.2 K5/VSSP, VSSP32 and VSSP64 format	99
D.2.1 Data structure	99
D.2.2 VSSP header format	100
D.2.3 VSSP32 and VSSP64 header format (general specifications)	100
D.2.4 Predefined and reserved format numbers	102
D.2.5 VSSP data block	106
D.2.6 Data block format for Format #21 and #22 (extended format)	106
D.3 Mark5B data format	107
D.3.1 Data structure	107
D.3.2 Mark5B header format	107
D.3.3 Mark5B data block	107
D.4 VDIF data format	109
D.4.1 Data structure	109
D.4.2 VDI header format	109
D.4.3 VDIF data block	109
E How to install PGPlot	112
E.1 by “apt-get” (for Ubuntu 14.04)	112
E.2 step by step	112
F How to install FFTW	114

1 Installation of the package

K5 software correlator was developed to correlate VLBI data with VSSP format observed by a K5/VSSP sampler. But it can now process any kind of data format, such as, Mark-5B, VDIF, ADS, OCTAD besides VSSP format. Software correlator is written in C, so that it can run on most of Linux distributions.

PCPLOT or GNUPLOT is used as a graphics package. Therefore PGPLOT or GNUPLOT should be installed in advance. Some software programs, e.g., “fx_cor” and “fx_cor_new”, support the use of FFTW package which improves throughput significantly. If you want to use FFTW, FFTW3 package should be installed in advance. Please see Appendices E and F for how to install these packages.

1.1 Installation from an archive file

Put an archive file “ipvlbi_corYYYYMMDD.tar.gz” on an adequate directory, where YYYYMMDD is archive date (year, month, day) such as 20170119, then decompress as follows.

```
tar xvzf ipvlbi_corYYYYMMDD.tar.gz
```

As the directory named “ipvlbiYYYYMMDD” is created under the current directory, change the working directory to “ipvlbiYYYYMMDD” as follows.

```
cd ipvlbiYYYYMMDD
```

Execute “make” as follows.

```
make T=COR [F=FFTW] [G=GNUPLOT]
```

```
where F=FFTW --- use FFTW package for FFT (default is FFT included in the package)
      G=GNUPLOT --- use GNUPLOT for graphics instead of PGPLOT (default is PGPLOT)
```

High-speed FFT becomes possible by using the “F=FFTW” option when FFTW package has been already installed.

When re-make, execute

```
make clean
```

then execute

```
make T=COR [F=FFTW] [G=GNUPLOT]
```

1.2 Installation step by step

How to install the package step by step is as follows where \$HOME is the directory where an archive file is decompressed.

```
cd $HOME/ipvlbiYYYYMMDD/apri
make
make install
cd $HOME/ipvlbiYYYYMMDD/corr
make F=FFTW      <== in case of using FFTW package
make install
cd $HOME/ipvlbiYYYYMMDD/sdelay
make
make install
cd $HOME/ipvlbiYYYYMMDD/src
make S=None install <== no use of a sampler *1
cd $HOME/ipvlbiYYYYMMDD/mark5
make
make install
cd $HOME/ipvlbiYYYYMMDD/vdif
make
make install
```

*1. Note that how to make at “src” directory differs from other directories (option “install” is used simultaneously with option “S=None”)

When re-make, issue “make clean” at each subdirectory, then issue “make” at each subdirectory.

1.3 Environment variables

User-defined environment variables are accepted in the most of utility programs. The programs themselves define some environment variables. By typing as follows,

program-name env

the defined variables and current values are displayed.

example: typing

```
fx_cor env
```

The following messages are displayed.

Enviroment variables

```
K5COUT --- default directory for correlation data out
              ( (null) ), program deflt is ( ../cout/ )
K5APRIDIR --- default directory for apriori file
                 ( (null) ), program deflt is ( ../corrapri/ )
PGDISP --- default PGPLOT display device when selected so
              ( /XSERVE )
```

1.4 Directory structure after installation

```
$HOME/ipvlbiYYYYMMDD/
|
+readme_e.txt      instruction (this file)
+readme.txt        instruction in Japanese
+archive_cor       shell script file to make an archive file
+pgplot_install.txt how to install PGLOT (in Japanese)
+fftw_install.txt how to install FFTW (in Japanese)
+makefile          make file to install K5 utilities
|
+apri/           ----- directory for a-priori calculation
|   **.c           source file
|   **.h           include file
|   +makefile      makefile for this directory
|
+bin/            ----- directory for executable files
|
+corr/           ----- directory for software correlator
|   **.c           source file
|   **.h           include file
|   +makefile      makefile for this directory
|
+corrapri/      ----- directory for a-priori files
|   +ape_sample.txt    sample a-priori file
|   +apelist_sample.txt sample a-priori file list
|
+cout/           ----- directory for correlator outputs
|   +coutNNNN.txt     output from XF-type correlator
|   +couttNNNN.txt    output from FX-type correlator
|
+log/            ----- directory for log output
|
+mark5/          ----- directory for Mark5<->K5 format conversion
|   **.c           source file
|   **.h           include file
|   +makefile      makefile for this directory
|   +m5tok5info.txt sample information file to convert Mrak5 to K5
|   +k5tom5info.txt sample information file to convert K5 to Mrak5
|   +vlbainfo.txt  sample information file to convert VLBA to Mrak5
|
+sdelay/         ----- directory for coarse search software
|   **.c           source file
|   **.h           include file
|   +makefile      makefile for this directory
|
+sked/           ----- directory for schedule files
|   +sample.skd    sample schedule file (SKED format)
|   +sample.vex    sample schedule file (VEX format)
|
+src/            ----- directory for observation software
|   **.c           source file
|   **.h           include file
|   +makefile      makefile for this directory
|
+vdif/           ----- directory for VDIF<->K5 format conversion
|   **.c           source file
|   **.h           include file
|   +makefile      makefile for this directory
|
+man/            ----- directory for man page
|
+doc/            ----- directory for documents
|   +cor_manual_j.YYYYMMDD.pdf  Manual (Japanese)
|   +cor_manual.YYYYMMDD.pdf    Manual (English)
|   +index.html          Web Manual (Japanese)
|   +index-e.html        Web Manual (English)
```

1.5 Set up your environment

1. In case that installed directory is, e.g., \$HOME/K5/ipvlbiXXXXXXXXX make symbolic link as follows.

```
ln -s $HOME/K5/ipvlbiXXXXXXXXX $HOME/ipvlbi
```

if link has been already existed, issue command with “f” option as follows.

```
ln -sf $HOME/K5/ipvlbiXXXXXXXXX $HOME/ipvlbi
```

2. then add following description in your resource file (e.g., .bashrc).

```
export PATH=$PATH:$HOME/ipvlbi/bin      (for .bashrc)  
setenv PATH $PATH:$HOME/ipvlbi/bin      (for .cshrc)
```

Now you can exexute all K5 programs by merely re-linking a symbolic link when new version is installed.

3. Archives with version after 2010-02-08 includes man page files. Therefore you can use K5 software man page by adding following description in your resource file (e.g., .bashrc).

```
export MANPATH=$HOME/ipvlbi/man:$MANPATH      (for .bashrc)  
setenv MANPATH $HOME/ipvlbi/man:$MANPATH      (for .cshrc)
```

e.g., you can issue “man cor” to know how to execute it. “man k5cor” tells about all K5 software correlation programs and utilities with brief instructions.

2 Software programs list

As for software programs listed here except for “sdelay”, you can get how to run by just executing a program itself without any option. You can get version information by executing a program with the “**--version**” option.

2.1 A-priori calculation

apri_calc	– a-priori parameter calculation and generate an a-priori file (both standard schedule file and VEX file are supported)	...apri
skdchk	– check schedule file and display disk size required for K5/VSSP observation	...src

Note: Last column shows the directory of source code.

2.2 Correlation processing

fx_cor	– FX-type software correlator for K5/VSSP format data	...corr
fx_cor_all	– “fx_cor” for two or more scan data	...corr
fx_cor_new	– FX-type software correlator supporting a variety of data formats (K5/VSSP, VDIF, Mark5B, ADS)	...corr
fx_cor_all_new	– “fx_cor_new” for two or more scan data	...corr
cor	– XF-type software correlator dedicated to 1 bit sampling data for K5/VSSP format data	...corr
cor_all	– “cor” for two or more scan data	...corr
cor_new	– XF-type software correlator dedicated to 1 bit sampling data supporting a variety of data formats (K5/VSSP, VDIF, Mark5B, ADS)	...corr
cor_all_new	– “cor_new” for two or more scan data	...corr
sdelay	– coarse fringe search. get residual delay and delay rate from correlated data	...sdelay
cor_mon	– display correlation function dynamically (support PG PLOT only)	...corr

Note: Last column shows the directory of source code.

2.3 Data check

oscillo	– display sampled data dynamically for K5/VSSP data (support PG PLOT only)	...src
speana	– display spectrum for K5/VSSP data	...src
speana_n	– display spectrum dynamically for K5/VSSP data (support PG PLOT only)	...src
g_speana	– display spectrum supporting a variety of data formats (K5/VSSP, VDIF, Mark5B, ADS)	...corr
datachk	– check K5/VSSP format data	...src
vdifcheck	– check VDIF format data	...vdif
m5check	– check Mark-5 format data	...mark5

Note: Last column shows the directory of source code.

2.4 Data Format Conversion

k5tom5b	– convert K5 format to Mark5B format	...mark5
k5tom5	– convert K5 format to Mark5 format	...mark5
k5tovdif	– convert K5 format to Mark5B format	...vdif
ads2k5	– convert ADS3000 (DBBC mode) format to K5 format	...mark5
m5btok5	– convert Mark5B format to K5 format	...mark5
m5tok5	– convert Mark5 format to K5 format	...mark5

vdif2k5	– convert VDIF format to K5 format	...vdif
vdif2m5b	– convert VDIF format to Mark5B format	...vdif

Note: Last column shows the directory of source code.

3 A-priori calculation software

3.1 apri_calc

“apri_calc” calculates a priori values and generate an a-priori file necessary for cross correlation processing. Both SKED and VEX format files are supported as a schedule file.

The analysis method of the \$CODES block in the SKED file is improved at Ver.2019-12-21 and later. As a consequence, it is possible to create an appropriate a-priori file even if the correspondence of frequency and CH# is different for each station. The option ‘-legacy’ is added to keep compatibility with versions before 2019-12-21.

3.1.1 How to execute

Type 1

apri_calc *skdfile* [*options*]

where *skdfile*

- schedule file name (either VEX or SKED format)
if “-” is accompanied with skdfile like “-skdfile”, it means monitor
only the contents of schedule file. option “-monit” as for Ver.2016-
10-12 and later, option “-monit” gives the same function.

options (any order: when parameter is omitted, it will be asked it later)

-apedir *apriori_file_out_directory*

- set directory for apriori file out. default is the environment variable K5APRIOUT. If this environment variable is not defined, then “..//corrapri” will be applied as a default.

-baseid *baseline_id*

- set baseline ID (A2 or A4)

-coffset *clock_offset*

- set clock offset (sec) of Y station to X station. Positive value
means Y clock tic earlier than X clock tic. Default is 0.0

-crate *clock_rate*

- set clock rate (s/s) difference between X and Y station clock.
Default is 0.0

-ceepoch *epoch*

- set epoch of clock offset and clock rate epoch is a format of ei-
ther YYYY/DDD-HH:MM:SS or YYYY/MM/DD-HH:MM:SS or
YYYYDDDHHMMSS or 0 (0 means each PRT: Default is each
PRT)

-g *group*

- set frequency group (1-4) for 4ch mode correspnding to a sampler
host PC (default is 1)

When data format is set to other than ”K5/VSSP”, default be-
comes 0 (all channels will be selected)

-ch *channel*

- set frequency channel for 1ch mode (default is 1)

-start *start_obs*

- set start scan# (default is the 1st scan#)

-stop *stop_obs*

- set stop scan# (default is the last scan#)

-xdir *xdir*

- set X data file directory (default is “.”)

-ydir *ydir*

- set Y data file directory (default is “.”)

-ut1 *ut1_c*

- UT1-UTC (sec)

-wobbx *wobbx*

- Wobb X (arcsec)

-wobby *wobby*

- Wobb Y (arcsec)

-type1 | -type2

- set K5 observation file naming rule

1: Type I, 2: Type II

-type1 : sidDDDNNNN.dat (default)

-type2 : sidDDDHHMMSSG.dat

(Note: this option is to keep compatibility with the program with
the old version. Use “-type” option as follows)

-type *naming-type*

- set K5 observation file naming rule

1 : Type 1 sidDDDNNNN.dat (default for SKED)

-1 : Type -1 sidDDDNNNN.#ch.dat

2 : Type 2 sidDDDHHMMSSG.dat

-2 : Type -2 sidDDDHHMMSSG.#ch.dat

- 3 : Type 3 expid_sidG_scanid_YYYYDDDDHHMMSS.k5
(compliant with the naming rule of e-VLBI)
- 4 : unused
- 5 : Type 5 expid_scan#.stcode.k5a(-d) (default for VEX)
- 6 : Type 6 expid_sid_scanid.k5a(-d)
- see Note 1 for details
- typeX *naming_type*
- typeY *naming_type*
- subnet | -nosubnet
- skey *satellite_key*
- xcoff *x_clock_offset*
- lsb
- shift *time*
- format VDIF|M5B|M5B|OCTAD|ADS|[VSSP] [*sampling_cond*]
- formX VDIF|M5B|M5B|OCTAD|ADS|[VSSP] [*sampling_cond*]
- formY VDIF|M5B|M5B|OCTAD|ADS|[VSSP] [*sampling_cond*]
- xM[Hz]nB[IT]mC[H]* (any order)
 - x* – sampling frequency (MHz)
 - n* – # of AD bits
 - m* – # of channels
- ===== following options are valid for Ver.2016-10-12 and later =====
- source *star_name*
- m[onit]
- ===== following options are valid for Ver.2019-05-23 and later =====
- thread *thread_num*
- threadX *thread_num*
- threadY *thread_num*
- ===== following options are valid for Ver.2019-12-03 and later =====
- thread MULTI|[*th1[,th2[,th3,...]]*]
- threadX MULTI|[*th1[,th2[,th3,...]]*]
- threadY MULTI|[*th1[,th2[,th3,...]]*]
- ===== following options are valid for Ver.2019-12-21 and later =====
- uoca

-legacy – same as option ‘-uoca’

Type 2

apri_calc *skdfile* [*apedir* [*baseid* *coffset* *roffset* *frqgr* *nobs1* *nobs2* *xdir* *ydir* *ut1_c* *wobbx* *wobby* [*naming_type* [*subnet* [*xcoff* [*source*]]]]]]

where *skdfile* – schedule file name (either VEX or SKED format)
 if “-” is accompanied with skdfile like “-skdfile”, it means monitor
 only the contents of schedule file. option “-monit” as for Ver.2016-
 10-12 and later, option “-monit” gives the same function.
 apedir – a-priori file out directory. Default is given by environmental vari-
 able K5APRIOUT. If this is not defined program default will be
 applied.
if following parameters are omitted, they will be asked interactively
 baseid – baseline ID (A2 or A4)
 coffset – clock offset (sec)
 roffset – clock rate offset (s/s)
 frqgr – frequency group# corresponding to observation PC (1-4)
 nobs1 – start scan#
 nobs2 – stop scan# (nobs1=0, nobs2=0 for all scans)
 xdir – data file directory for X station
 ydir – data file directory for Y station
 ut1_c – UT1-UTC (sec)
 wobbx – WobbX (arcsec)
 wobby – WobbX (arcsec)
 naming_type – K5 observation file naming rule
 1: Type 1 sidDDDNNNN.dat (default for SKED)
 -1: Type -1 sidDDDNNNN.#ch.dat
 2: Type 2 sidDDDHMMSSG.dat
 -2: Type -2 sidDDDHMMSSG.#ch.dat
 3: Type 3 expid_sidG_scanid_YYYYYDDDHHMMSS.k5 (compli-
 ant with e-VLBI)
 4: unused
 5: Type 5 expid_scan#.stcode.k5a(-d) (default for VEX)
 6: Type 6 expid_sid_scanid.k5a(-d)
 see Note 1 for details
 subnet – subnet mode control 0: no-subnet, 1: subnet on(default)
 xcoff – X clock offset to UTC (sec)
===== following option is valid for Ver.2016-10-12 and later =====
 source – set extracting scans by a star name from a schedule file

Monitoring environmental variables

check environmental variables used in “apri_calc”
apri_calc env

```
K5SKED -- default directory for a schedule file
K5APRIDIR -- default directory for an a-priori file
K5NAMING -- default out file naming rule
```

Note 1: naming rule of observation data file

Type 1 or -1 (I or -I)

XDDDNNNN.[#ch.]dat

where

X	-	station ID (1 letter)
DDD	-	total day of the 1st scan
NNNN	-	scan# (4 digits)
#ch	-	# of channels (1 4) (in case of Type -1)

Type 2 or -2 (II or -II)

sidDDDHMMSSG.[#ch.]dat

where

sid	-	station ID (1 or 2 letters)
DDDHMMSS	-	date and time of scan DDD – year (3 digits) HH – hour (2 digits) MM – minute (2 digits) SS – second (2 digits)
G	-	frequency group ID (a b c d) or null
#ch	-	# of channels (1 4) (in case of Type -2)

Type 3 (compliant with the naming rule of e-VLBI)

expid_sidG_scanid_YYYYDDDHMMSS.k5

where

expid	-	experiment code
sid	-	station ID (2 lower-case letters)
G	-	terminal (PC) ID (1 2 3 4) or null set by “freqg” parameter
scanid	-	scan ID for VEX file VEX ファイル使用時はスキャン IDそのまま ddd-hhmm for SKED file. When multiple scans are included in the same minute, a,b,c,d,... are added for the 2nd scan and later.
YYYYDDDHMMSS	-	scan start time
.k5	-	file descriptor for K5 format

Type 4 unused

Type 5 default for VEX file (to keep old version of apri_calc)

expid_scan#.stcode.k5a(-d)

where

expid	-	experiment code
scan#	-	scan#
stcode	-	station ID
k5	-	descriptor for K5 format
a-d	-	frequency group (or null)

Note 2: Naming rule of created a-priori file

Type I

apeDDDNnnnXYG.txt

where ‘ape’ – fixed letters
 DDD – total day of 1st scan
 NNNN – scan# (4 digits)
 XY – baseline ID (2 or 4 letters)

	(ID described in a schedule file: 1 letter for SKED, 2 letters for VEX)
G	- sampling host PC ID (a,b,c,d) or null corresponding to frequency group ID 1-4 or 0

Type II

apeDDDHMMSSXYG.txt

where	'ape'	- fixed letters
	DDDHMMSS	- date and time of scan DDD - year (3 digits) HH - hour (2 digits) MM - minute (2 digits) SS - second (2 digits)
	XY	- baseline ID (1 or 2 letters)
	G	- sampling host PC ID (a,b,c,d) or null corresponding to frequency group ID 1-4 or 0

Type III

ape_expid_sid1sid2_scanid_YYYYDDDHMMSS.txt

where	'ape'	- fixed letters
	expid	- experiment code
	sid1	- station ID of X station (2 lower-case letters)
	sid2	- station ID of Y station (2 lower-case letters)
	scanid	- scan ID for VEX file
	YYYYDDDHMMSS	ddd-hhmm for SKED file. When multiple scans are included in the same minute, a,b,c,d,... are added for the 2nd scan and later. - scan start time

Note 3: Clock parameters and epoch

Clock offset c_{offset} is given as

$$c_{offset} = c_o + \Delta\tau$$

where c_o is clock offset used at "apri_calc" and $\Delta\tau$ is residual delay obtained by "sdelay". Clock rate c_{rate} is given as

$$c_{rate} = \frac{c_2 - c_1}{t_2 - t_1}$$

where c_1 is clock offset obtained for a scan at time t_1 and c_2 is clock offset obtained for a scan at time t_2 , where t_1 and t_2 are PRT (processing reference time) given by a unit of second. If an experiment session extends on the next day, take the day difference into consideration. If clock rate is not 0, clock epoch should be set as t_1 .

3.1.2 Examples (monitoring schedule)

Ex.1 Checking environmental variables used by "apri_calc"

```
$ apri_calc env
apri_calc (Ver. 2016-10-12)
Enviroment variables
  K5SKED --- default directory for schedule file
    ( (null) ), program deflt is ( ./ )
  K5APRIDIR --- default directory for apriori file
    ( (null) ), program deflt is ( ../corrapri/ )
  K5NAMING --- default K5 file naming rule
    1 | -1 | 2 | -2 | 3 | 5
```

```

K5SATKEY --- ( (null) ), program deflt is ( 1 )
                           default satellite keyword of 1ch obs
                           ( (null) ), program deflt is ( HYB NOZ GEO )

```

Ex.2 Checking a schedule file

```

$ apri_calc -k10189.skd   (or apri_calc k10189.skd -monit)
apri_calc (Ver. 2016-10-12)

===== RUN CONDITION =====
K5 file naming type is Type 1 : sidDDDDNNNN.dat (SKED deflt)
=====
SkdMonit: ***** Schedule file monitor *****
SkdMonit: Schedule file = ./k10189.skd
SkdMonit: Expcode      = K10189
SkdMonit: Total Scan # = 2203
SkdMonit: Total Star # = 12
SkdMonit:
SkdMonit: 1st Scan    = 2010/07/07 20:05:00 3C84
SkdMonit: Last Scan   = 2010/07/11 00:00:21 3C84
SkdMonit:
SkdMonit: ----- Station ID Table -----
SkdMonit: G --- KOGANEI
SkdMonit: R --- KASHIM11
SkdMonit:
SkdMonit: ----- Star Table -----
SkdMonit:          NAME1      NAME2    R.A.(deg)   DEC(deg)   EPOCH
SkdMonit: 1 0212+735      $ 34.378389 73.825728 2000.000000
SkdMonit: 2 0727-115      $ 112.579635 -11.686833 2000.000000
SkdMonit: 3 1921-293      $ 291.212733 -29.241700 2000.000000
SkdMonit: 4 2134+004      2134+00 324.160776 0.698393 2000.000000
SkdMonit: 5 2145+067      $ 327.022744 6.960723 2000.000000
SkdMonit: 6 1226+023      3C273B 187.277916 2.052388 2000.000000
SkdMonit: 7 1253-055      3C279 194.046527 -5.789312 2000.000000
SkdMonit: 8 1641+399      3C345 250.745042 39.810276 2000.000000
SkdMonit: 9 2223-052      3C446 336.446914 -4.950386 2000.000000
SkdMonit: 10 2251+158     3C454.3 343.490616 16.148211 2000.000000
SkdMonit: 11 0316+413     3C84 49.950667 41.511695 2000.000000
SkdMonit: 12 0923+392     4C39.25 141.762558 39.039126 2000.000000
SkdMonit:
SkdMonit: ----- Frequency (MHz) Table -----
SkdMonit: Gr# 1 7700.99 U 7710.99 U 7720.99 U 7850.99 U
SkdMonit: Gr# 2 8090.99 U 8290.99 U 8490.99 U 8550.99 U
SkdMonit: Gr# 3 8570.99 U 8580.99 U 2210.99 U 2220.99 U
SkdMonit: Gr# 4 2240.99 U 2290.99 U 2330.99 U 2340.99 U
SkdMonit:
SkdMonit: ----- PCAL Freq (kHz) Table -----
SkdMonit: Gr# 1 4010.0 4010.0 4010.0 4010.0
SkdMonit: Gr# 2 4010.0 4010.0 4010.0 4010.0
SkdMonit: Gr# 3 4010.0 4010.0 4010.0 4010.0
SkdMonit: Gr# 4 4010.0 4010.0 4010.0 4010.0
SkdMonit:

```

Ex.3 Checking a schedule file (set radio source name)

```

$ apri_calc -k10189.skd -source 3C273B    <== set radio source name "3C273B"
                                         by option '-source'

apri_calc (Ver. 2016-10-12)

===== RUN CONDITION =====
K5 file naming type is Type 1 : sidDDDDNNNN.dat (SKED deflt)
Pickup Source Name : 3C273B    <== this is the source name to be picked up
=====
SkdMonit: ***** Schedule file monitor *****
SkdMonit: Schedule file = ./k10189.skd
SkdMonit: Expcode      = K10189
SkdMonit: Total Scan # = 2203
SkdMonit: Total Star # = 12
SkdMonit:
SkdMonit: 1st Scan    = 2010/07/07 20:05:00 3C84
SkdMonit: Last Scan   = 2010/07/11 00:00:21 3C84
SkdMonit:
SkdMonit: ----- Station ID Table -----
SkdMonit: G --- KOGANEI

```

```

SkdMonit: R --- KASHIM11
SkdMonit: -----
SkdMonit: ----- Star Table -----
SkdMonit: NAME1      NAME2    R.A.(deg)   DEC(deg)   EPOCH
SkdMonit: 1 0212+735      $ 34.378389 73.825728 2000.000000
SkdMonit: 2 0727-115      $ 112.579635 -11.686833 2000.000000
SkdMonit: 3 1921-293      $ 291.212733 -29.241700 2000.000000
SkdMonit: 4 2134+004 2134+00 324.160776 0.698393 2000.000000
SkdMonit: 5 2145+067      $ 327.022744 6.960723 2000.000000
SkdMonit: 6 1226+023 3C273B 187.277916 2.052388 2000.000000
SkdMonit: 7 1253-055 3C279 194.046527 -5.789312 2000.000000
SkdMonit: 8 1641+399 3C345 250.745042 39.810276 2000.000000
SkdMonit: 9 2223-052 3C446 336.446914 -4.950386 2000.000000
SkdMonit: 10 2251+158 3C454.3 343.490616 16.148211 2000.000000
SkdMonit: 11 0316+413 3C84 49.950667 41.511695 2000.000000
SkdMonit: 12 0923+392 4C39.25 141.762558 39.039126 2000.000000
SkdMonit: -----
SkdMonit: ----- Frequency (MHz) Table -----
SkdMonit: Gr# 1 7700.99 U 7710.99 U 7720.99 U 7850.99 U
SkdMonit: Gr# 2 8090.99 U 8290.99 U 8490.99 U 8550.99 U
SkdMonit: Gr# 3 8570.99 U 8580.99 U 2210.99 U 2220.99 U
SkdMonit: Gr# 4 2240.99 U 2290.99 U 2330.99 U 2340.99 U
SkdMonit: -----
SkdMonit: ----- PCAL Freq (kHz) Table -----
SkdMonit: Gr# 1 4010.0 4010.0 4010.0 4010.0
SkdMonit: Gr# 2 4010.0 4010.0 4010.0 4010.0
SkdMonit: Gr# 3 4010.0 4010.0 4010.0 4010.0
SkdMonit: Gr# 4 4010.0 4010.0 4010.0 4010.0
SkdMonit: -----
SkdMonit: ----- PICKUP SCAN TABLE ----- <== scans picked up are displayed
SkdMonit: SCAN# SOURCE YYYY/DDD HH:MM:SS DURA STATION_IDS
SkdMonit: 84 3C273B 2010/189 02:56:33 30 G R
SkdMonit: 87 3C273B 2010/189 03:01:02 30 G R
SkdMonit: 90 3C273B 2010/189 03:06:44 30 G R
SkdMonit: .....
SkdMonit: 1791 3C273B 2010/191 10:58:40 30 G R
SkdMonit: 1795 3C273B 2010/191 11:09:26 30 G R
SkdMonit: 1797 3C273B 2010/191 11:14:24 30 G R
SkdMonit: 1799 3C273B 2010/191 11:20:11 30 G R
SkdMonit: -----

```

This is a useful to pick up strong source scans.

Ex.4 Checking a schedule file (set baseline and source name)

```

$ apri_calc -eg094a.vex -baseid KsSh -source 3C454.3
    <== baseline is selected by option 'baseid' (2 letters for SKED file and
        4 letters for VEX). star name is set by option '-source'

apri_calc (Ver. 2016-10-12)

===== RUN CONDITION =====
K5 file naming type is Type 1 : sidDDDDNNNN.dat (SKED deflt)
Pickup Source Name : 3C454.3      <== radio source name
Pickup Baseline ID : KsSh       <== baseline ID
=====
search_site: No CLOCK info for ATCA included in the VEX FILE.
search_site: So all 0 for clock information was set.
search_site: No CLOCK info for PARKES included in the VEX FILE.
search_site: So all 0 for clock information was set.
.... 中略 ....
search_site: No CLOCK info for IRBENE included in the VEX FILE.
search_site: So all 0 for clock information was set.
SkdMonit: ***** Schedule file monitor *****
SkdMonit: Schedule file = ./eg094a.vex
SkdMonit: Expcode = eg094a
SkdMonit: Total Scan # = 74
SkdMonit: Total Star # = 4
SkdMonit:
SkdMonit: 1st Scan = 2016/09/20 12:57:00 2223-052
SkdMonit: Last Scan = 2016/09/20 23:47:10 2215+020
SkdMonit:
SkdMonit: ----- Station ID Table -----
SkdMonit: At --- ATCA
SkdMonit: Pa --- PARKES
SkdMonit: Mp --- MOPRA
SkdMonit: Ho --- HOB_DBBC
SkdMonit: Cd --- CDDBBC

```

```

SkdMonit: Ti --- DSS43LBA
SkdMonit: Ks --- KASHIM34
SkdMonit: Ww --- WARK12M
SkdMonit: T6 --- TIANMA65
SkdMonit: Ur --- URUMQI
SkdMonit: Sh --- SHANGHAI
SkdMonit: Bd --- BADARY
.....
SkdMonit: Mc --- MEDICINA
SkdMonit: O8 --- ONSALA85
SkdMonit: Tr --- TORUN
SkdMonit: Hh --- HART
SkdMonit: Ir --- IRBENE
SkdMonit: (Note that 1 char station ID is not defined in a VEX file)
SkdMonit: -----
SkdMonit: ----- Star Table -----
SkdMonit: NAME1      NAME2    R.A.(deg)   DEC(deg)   EPOCH
SkdMonit: 1          FAKER     180.000000  85.000000  2000.000000
SkdMonit: 2          2215+020   334.450991  2.336309   2000.000000
SkdMonit: 3          2223-052   336.446914  -4.950386  2000.000000
SkdMonit: 4          3C454.3    343.490616  16.148211  2000.000000
SkdMonit: -----
SkdMonit: ----- Frequency (MHz) Table -----
SkdMonit: Gr# 1      1668.00 L  1668.00 U  1668.00 L  1668.00 U
SkdMonit: -----
SkdMonit: ----- PCAL Freq (kHz) Table -----
SkdMonit: Gr# 1      2000.0   2000.0   2000.0   2000.0
SkdMonit: -----
SkdMonit: ----- PICKUP SCAN TABLE ----- <== scans satisfying source name and
                                         baseline are displayed
SkdMonit: SCAN#      SOURCE YYYY/DDD HH:MM:SS DURA  STATION_IDS
SkdMonit: 14          3C454.3 2016/264 14:41:30  480  At Pa Mp Ho Cd Ti Ks Ww T6 Ur Sh Bd
SkdMonit: 29          3C454.3 2016/264 17:01:00  480  At Mp Ho Cd Ti Ks T6 Ur Sh Bd Sv Zc
SkdMonit: -----

```

3.1.3 Examples (in case of K5/VSSP)

Ex.1 non-interactive operation

Following example shows non-interactive operation in case that schedule file is “k10189.skd” in the ”..../corapri” directory, baseline ID=“RG”, scan#=8, clock offset=8.0 μ sec, and the directory of a-priori output is “./”.

```

$ apri_calc k10189.skd -baseid RG -apedir ./ -start 8 -stop 8 -coffset 8.0e-6
apri_calc (Ver. 2016-10-12)

=====
RUN CONDITION =====
K5 file naming type is Type 1 : sidDDDDNNNN.dat (SKED deflt)
Sub-net mode ON : PRT is set according to each scan length
Output directory : ./ 
=====

***** Schedule File Information *****
File name    --- ./k10189.skd
File type    --- SKED
Exp. code    --- K10189
# of stations --- 2
          G R
# of stars    --- 12
# of scans    --- 2203
1st Scan : 2010/07/07 20:05:00 3C84
Last Scan : 2010/07/11 00:00:21 3C84
*****


----- STATION ID TABLE -----
G --- KOGANEI
R --- KASHIM11
-----
Station ID for X station : R
Station ID for Y station : G
Selected Baseline is R-G
Sampling Information is as follows
          from schedule file          from operator
          KASHIM11 : 32MHz 1bit 16CH      OMHz Obit  OCH
          KOGANEI : 32MHz 1bit 16CH      OMHz Obit  OCH

Data directory for X station (KASHIM11) : ./
Data directory for Y station (KOGANEI) : ./
Frequency group and frequencies

```

```

Gr# 1 : 7700.99MHz U 7710.99MHz U 7720.99MHz U 7850.99MHz U
Gr# 2 : 8090.99MHz U 8290.99MHz U 8490.99MHz U 8550.99MHz U
Gr# 3 : 8570.99MHz U 8580.99MHz U 2210.99MHz U 2220.99MHz U
Gr# 4 : 2240.99MHz U 2290.99MHz U 2330.99MHz U 2340.99MHz U
Frequency Group# : 1
Gr# 1 is selected
PCAL freq (kHz) : 4010.0 4010.0 4010.0 4010.0
Clock offset and rate : 8e-06 0
Clock Epoch : 0/000 00:00:00
X Clock offset against UTC : 0.000000
ut1,wobbx,wobby : 0.000000 0.000000 0.000000
# of scans --- 2203
Scan range : 8 - 8
          8 2010189001135 4C39.25          0          0          0
Apriori File ( ./ape1880008RGa.txt ) created
Total # of a-priori files created is 1

```

Ex.2 Interactive operation

```

$ apri_calc k10189.skd -apedir apeout <== execute with "-apedir" option to set
                           a-priori out directory to "apeout"
apri_calc (Ver. 2016-10-12)

===== RUN CONDITION =====
K5 file naming type is Type 1 : sidDDDDNNNN.dat (SKED deflt)
Sub-net mode ON : PRT is set according to each scan length
Output directory : apeout <== if this directory does'nt exists, program will
stop with warning message.
=====

***** Schedule File Information *****
File name --- ./k10189.skd
File type --- SKED
Exp. code --- K10189
# of stations --- 2
      G R
# of stars --- 12
# of scans --- 2203
1st Scan : 2010/07/07 20:05:00 3C84
Last Scan : 2010/07/11 00:00:21 3C84
*****


----- STATION ID TABLE -----
G --- KOGANEI
R --- KASHIM11
-----
Enter Station ID for X station ----> R <== select station ID for X station
Enter Station ID for Y station ----> G <== select station ID for Y station
Selected Baseline is R-G
Sampling Information is as follows
      from schedule file      from operator
      KASHIM11 : 32MHz 1bit 16CH      OMHz Obit  OCH
      KOGANEI : 32MHz 1bit 16CH      OMHz Obit  OCH

Enter data directory for X station (KASHIM11)
---> ./ <== set X station data directory
Enter data directory for Y station (KOGANEI)
---> ./ <== set X station data directory
Data directory for X station (KASHIM11) : ./ 
Data directory for Y station (KOGANEI) : ./ 
Frequency group and frequencies
      Gr# 1 : 7700.99MHz U 7710.99MHz U 7720.99MHz U 7850.99MHz U
      Gr# 2 : 8090.99MHz U 8290.99MHz U 8490.99MHz U 8550.99MHz U
      Gr# 3 : 8570.99MHz U 8580.99MHz U 2210.99MHz U 2220.99MHz U
      Gr# 4 : 2240.99MHz U 2290.99MHz U 2330.99MHz U 2340.99MHz U
Enter Frequency Group# ----> 2 <== select frequency group
Frequency Group# : 2
Gr# 2 is selected
PCAL freq (kHz) : 4010.0 4010.0 4010.0 4010.0
Enter Clock Offset (sec) ----> 0.0 <== set clock offset

```

```

                                (reflect clock offset after fringe search)
Enter Clock Rate (s/s) ----> 0.0 <== if non zero value is set, epoch will be
                                asked as follows.

Enter Clock Epoch (YYYY/DDD-HH:MM:SS|YYYY/MM/DD-HH:MM:SS|YYYYDDDHHMMSS)
    0 for each PRT (old style)
    ----> 2010/07/07-20:05:00      <== enter epoch. If you enter 0, epoch is regarded
                                as each PRT (processing reference time).
Clock offset and rate : 0 0      <== here clock rate is reflected
Clock Epoch : 0/000 00:00:00      <== here epoch is reflected
X Clock offset against UTC : 0.000000 <== this parameter can not be set in case of
                                interactive operation
Enter UT1-UTC (sec) ----> 0.0 <== if precise value is not clear, 0 is OK.
Enter Wobb X (arcsec) ----> 0.0 <== if precise value is not clear, 0 is OK.
Enter Wobb Y (arcsec) ----> 0.0 <== if precise value is not clear, 0 is OK.

ut1,wobbx,wobby : 0.000000 0.000000 0.000000

# of scans --- 2203
Enter Start Scan number ----> 8 <== start scan#
Enter Stop Scan number ----> 8 <== stop scan#
Scan range : 8 - 8

     8 2010189001135 4C39.25          0          0          0

Apriori File ( apeout/ape1880008RGb.txt ) created
Total # of a-priori files created is 1

$
```

Ex.3 Interactive operation under (limited source name)

```

$ apri_calc k10189.skd -source 3C273B <== source name is limited to "3C273B" by option '-sour
apri_calc (Ver. 2016-10-12)

=====
RUN CONDITION =====
K5 file naming type is Type 1 : sidDDDDNNNN.dat (SKED deflt)
Sub-net mode ON : PRT is set according to each scan length
Pickup Source Name : 3C273B <== radio source name to be picked up
Output directory : ../corrapri/
=====

***** Schedule File Information *****
File name --- ./k10189.skd
File type --- SKED
Exp. code --- K10189
# of stations --- 2
        G R
# of stars --- 12
# of scans --- 2203
1st Scan : 2010/07/07 20:05:00 3C84
Last Scan : 2010/07/11 00:00:21 3C84
*****



----- STATION ID TABLE -----
G --- KOGANEI
R --- KASHIM11
-----
Enter Station ID for X station ----> R
Enter Station ID for Y station ----> G
Selected Baseline is R-G
Sampling Information is as follows
        from schedule file           from operator
        KASHIM11 : 32MHz 1bit 16CH   OMHz Obit  OCH
        KOGANEI  : 32MHz 1bit 16CH   OMHz Obit  OCH

Enter data directory for X station (KASHIM11)
---> /
Enter data directory for Y station (KOGANEI)
---> /
Data directory for X station (KASHIM11) : ../
Data directory for Y station (KOGANEI) : ../
```

```

Frequency group and frequencies
Gr# 1 : 7700.99MHz U 7710.99MHz U 7720.99MHz U 7850.99MHz U
Gr# 2 : 8090.99MHz U 8290.99MHz U 8490.99MHz U 8550.99MHz U
Gr# 3 : 8570.99MHz U 8580.99MHz U 2210.99MHz U 2220.99MHz U
Gr# 4 : 2240.99MHz U 2290.99MHz U 2330.99MHz U 2340.99MHz U
Enter Frequency Group# ----> 1
Frequency Group# : 1
Gr# 1 is selected
PCAL freq (kHz) : 4010.0 4010.0 4010.0 4010.0
Enter Clock Offset (sec) ----> 0
Enter Clock Rate (s/s) ----> 0
Clock offset and rate : 0 0
Clock Epoch : 0/000 00:00:00
X Clock offset against UTC : 0.000000
Enter UT1-UTC (sec) ----> 0
Enter Wobb X (arcsec) ----> 0
Enter Wobb Y (arcsec) ----> 0

ut1,wobbx,wobby : 0.000000 0.000000 0.000000

# of scans --- 2203
Enter Start Scan number ----> 0      <== 0 means all scans
Enter Stop Scan number ----> 0       <== 0 means all scans
Scan range : 1 - 2203

84 2010189025648 3C273B          0          0          0
                                         <== scans for 3C273B are extracted

Apriori File ( ./corrapri/ape1880084RGa.txt ) created
87 2010189030117 3C273B          0          0          0

Apriori File ( ./corrapri/ape1880087RGa.txt ) created
90 2010189030659 3C273B          0          0          0

.....
Apriori File ( ./corrapri/ape1881797RGa.txt ) created
1799 2010191112026 3C273B         0          0          0

Apriori File ( ./corrapri/ape1881799RGa.txt ) created
Total # of a-priori files created is 168
$
```

Ex.4 Non-interactive operation of Ex.3

```

$ apri_calc k10189.skd ./corrapri RG 0 0 1 0 0 ./ . 0 0 0 1 0 0 3C273B
apri_calc (Ver. 2016-10-12)

=====
RUN CONDITION =====
K5 file naming type is Type 1 : sidDDDDNNNN.dat (SKED deflt)
Sub-net mode OFF: PRT is set based on the longest scan
Pickup Source Name : 3C273B
Output directory : ./corrapri
=====

***** Schedule File Information *****
File name --- ./k10189.skd
File type --- SKED
Exp. code --- K10189
# of stations --- 2
               G R
# of stars    --- 12
# of scans    --- 2203
1st Scan : 2010/07/07 20:05:00 3C84
Last Scan : 2010/07/11 00:00:21 3C84
*****



----- STATION ID TABLE -----
G --- KOGANEI
R --- KASHIM11
-----
Station ID for X station : R
Station ID for Y station : G
Selected Baseline is R-G
Sampling Information is as follows
```

```

from schedule file           from operator
KASHIM11 : 32MHz 1bit 16CH   0MHz Obit OCH
KOGANEI  : 32MHz 1bit 16CH   0MHz Obit OCH

Data directory for X station (KASHIM11) : ./
Data directory for Y station (KOGANEI) : ./
Frequency group and frequencies
Gr# 1 : 7700.99MHz U 7710.99MHz U 7720.99MHz U 7850.99MHz U
Gr# 2 : 8090.99MHz U 8290.99MHz U 8490.99MHz U 8550.99MHz U
Gr# 3 : 8570.99MHz U 8580.99MHz U 2210.99MHz U 2220.99MHz U
Gr# 4 : 2240.99MHz U 2290.99MHz U 2330.99MHz U 2340.99MHz U
Frequency Group# : 1
Gr# 1 is selected
PCAL freq (kHz) : 4010.0 4010.0 4010.0 4010.0
Clock offset and rate : 0 0
Clock Epoch : 0/000 00:00:00
X Clock offset against UTC : 0.000000

ut1,wobbx,wobby : 0.000000 0.000000 0.000000

# of scans --- 2203
Scan range : 1 - 2203

84 2010189025648 3C273B          0          0          0
Apriori File ( ./corrapri/ape1880084RGa.txt ) created
87 2010189030117 3C273B          0          0          0
.....
Apriori File ( ./corrapri/ape1881797RGa.txt ) created
1799 2010191112026 3C273B          0          0          0
Apriori File ( ./corrapri/ape1881799RGa.txt ) created
Total # of a-priori files created is 168
$
```

A-priori files are created under the "apeout" directory. If a-priori output directory is not specified, a-priori files are created under "../corrapri" directory.

3.1.4 Example (in case of VDIF Format Data)

```

$ apri_calc ..sked/ks15002.skd -format VDIF <== Data format "VDIF" is specified
                                         by "-format VDIF" option
apri_calc (Ver. 2016-10-12)

===== RUN CONDITION =====
K5 file naming type is Type 1 : sidDDDDNNNN.dat (SKED deflt)
Sub-net mode ON : PRT is set according to each scan length
X station data format : VDIF      <== specified data format for X station
Y station data format : VDIF      <== specified data format for Y station
Output directory : ../corrapri
=====

***** Schedule File Information *****
File name --- ./src/ks15002.skd
File type --- SKED
Exp. code --- KS15002
# of stations --- 5
          G R Y B O
# of stars    --- 16
# of scans    --- 289
1st Scan : 2015/01/02 02:00:00 3C345
Last Scan : 2015/01/03 02:02:43 0059+581
*****



----- STATION ID TABLE -----
G --- KOGANEI
R --- KASHIM11
Y --- TATEYAMA
B --- MIURA
O --- KASHIM34

Enter Station ID for X station ----> R
Enter Station ID for Y station ----> G
Selected Baseline is R-G
Sampling Information is as follows      <==display sampling information
```

```

          from schedule file      from operator
KASHIM11 :   16MHz 1bit 16CH    0MHz 0bit 0CH
            16MHz 1bit 16CH    0MHz 0bit 0CH

Enter data directory for X station (KASHIM11)
---> ./           <== set data directory for X station
Enter data directory for Y station (KOGANEI)
---> ./           <== set data directory for Y station
Data directory for X station (KASHIM11) :./
Data directory for Y station (KOGANEI) :./
Frequency group and frequencies
Gr# 1 : 7864.99MHz U 7874.99MHz U 7884.99MHz U 8014.99MHz U
Gr# 2 : 8114.99MHz U 8244.99MHz U 8504.99MHz U 8544.99MHz U
Gr# 3 : 8564.99MHz U 8574.99MHz U 2214.99MHz U 2224.99MHz U
Gr# 4 : 2234.99MHz U 2264.99MHz U 2294.99MHz U 2304.99MHz U
Enter Frequency Group# (0 for all) ----> 0 <== select all frequencies
All frequency mode is selected!
Enter Clock Offset (sec) ----> 0
Enter Clock Rate (s/s) ----> 0
Clock offset and rate : 0 0
Clock Epoch : 0/000 00:00:00
X Clock offset against UTC : 0.000000
Enter UT1-UTC (sec) ----> 0
Enter Wobb X (arcsec) ----> 0
Enter Wobb Y (arcsec) ----> 0

ut1,wobbx,wobby : 0.000000 0.000000 0.000000

# of scans --- 289
Enter Start Scan number ----> 1
Enter Stop Scan number ----> 2
Scan range : 1 - 2

1 2015002020045 3C345 0 0 0
Apriori File ( ../corrapri/ape0020001RG.txt ) created
2 2015002020520 3C454.3 0 0 0

Apriori File ( ../corrapri/ape0020002RG.txt ) created
Total # of a-priori files created is 2

$
```

Edit an a-priori file by a text editor if necessary.

3.1.5 Example (in case of Mark-5B format Data)

```

$ apri_calc ..sked/ks15002.skd -format M5B <-- set data format "Mark-5B"
                                         by "-format M5B" option
apri_calc (Ver. 2016-10-12)

===== RUN CONDITION =====
K5 file naming type is Type 1 : sidDDDNNNN.dat (SKED deflt)
Sub-net mode ON : PRT is set according to each scan length
X station data format : Mark-5B <== specified data format for X station
Y station data format : Mark-5B <== specified data format for Y station
=====

***** Schedule File Information *****
File name --- ./src/ks15002.skd
File type --- SKED
Exp. code --- KS15002
# of stations --- 5
          G R Y B O
# of stars --- 16
# of scans --- 289
1st Scan : 2015/01/02 02:00:00 3C345
Last Scan : 2015/01/03 02:02:43 0059+581
*****


----- STATION ID TABLE -----
G --- KOGANEI
R --- KASHIM11
Y --- TATEYAMA
B --- MIURA
O --- KASHIM34
-----
```

```

Enter Station ID for X station ----> R
Enter Station ID for Y station ----> G
Selected Baseline is R-G
Sampling Information is as follows      <== display sampling information
                                         from schedule file      from operator
KASHIM11   :    16MHz 1bit 16CH          0MHz 0bit  OCH
KOGANEI    :    16MHz 1bit 16CH          0MHz 0bit  OCH

Enter data directory for X station (KASHIM11)
---> ./           <== set data directory for X station
Enter data directory for Y station (KOGANEI)
---> ./           <== set data directory for Y station
Data directory for X station (KASHIM11) :./
Data directory for Y station (KOGANEI) :./
Frequency group and frequencies
Gr# 1 : 7864.99MHz U 7874.99MHz U 7884.99MHz U 8014.99MHz U
Gr# 2 : 8114.99MHz U 8244.99MHz U 8504.99MHz U 8544.99MHz U
Gr# 3 : 8564.99MHz U 8574.99MHz U 2214.99MHz U 2224.99MHz U
Gr# 4 : 2234.99MHz U 2264.99MHz U 2294.99MHz U 2304.99MHz U
Enter Frequency Group# (0 for all) ----> 0  <== select all frequencies
All frequency mode is selected!
Enter Clock Offset (sec) ----> 0
Enter Clock Rate (s/s) -----> 0
Clock offset and rate : 0 0
Clock Epoch : 0/000 00:00:00
X Clock offset against UTC : 0.000000
Enter UT1-UTC (sec)  ----> 0
Enter Wobb X (arcsec) -----> 0
Enter Wobb Y (arcsec) -----> 0

ut1,wobbx,wobby : 0.000000 0.000000 0.000000

# of scans --- 289
Enter Start Scan number ----> 1
Enter Stop Scan number ----> 2
Scan range : 1 - 2

1 2015002020045 3C345 0 0 0
Apriori File ( ../corrapri/ape0020001RG.txt ) created
2 2015002020520 3C454.3 0 0 0

Apriori File ( ../corrapri/ape0020002RG.txt ) created
Total # of a-priori files created is 2
$
```

Edit an a-priori file by a text editor if necessary.

3.1.6 Example (in case of VSSP format for X station and VDIF format Y station)

```

$ apri_calc ..sked/ks15002.skd -formY VDIF  <== Y station data format is specified
                                         by "-formY" option to VDIF.
                                         X station is default format (VSSP)

apri_calc (Ver. 2016-10-12)

=====
RUN CONDITION =====
K5 file naming type is Type 1 : sidDDDDNNNN.dat (SKED deflt)
Sub-net mode ON : PRT is set according to each scan length

Y station data format : VDIF      <== display specified data format
=====

***** Schedule File Information *****
File name --- ./src/ks15002.skd
File type --- SKED
Exp. code --- KS15002
# of stations --- 5
                         G R Y B O
# of stars   --- 16
# of scans   --- 289
1st Scan : 2015/01/02 02:00:00 3C345
Last Scan : 2015/01/03 02:02:43 0059+581
*****
```

```

----- STATION ID TABLE -----
G --- KOGANEI
R --- KASHIM11
Y --- TATEYAMA
B --- MIURA
O --- KASHIM34
-----
Enter Station ID for X station ----> R
Enter Station ID for Y station ----> G
Selected Baseline is R-G
Sampling Information is as follows      <== display sampling information
from schedule file                    from operator
KASHIM11 :    16MHz 1bit 16CH          OMHz Obit OCH
KOGANEI  :    16MHz 1bit 16CH          OMHz Obit OCH

Enter data directory for X station (KASHIM11)
---> ./           <== set data directory for X station
Enter data directory for Y station (KOGANEI)
---> ./           <== set data directory for Y station
Data directory for X station (KASHIM11) :./
Data directory for Y station (KOGANEI) :./
Frequency group and frequencies
Gr# 1 : 7864.99MHz U 7874.99MHz U 7884.99MHz U 8014.99MHz U
Gr# 2 : 8114.99MHz U 8244.99MHz U 8504.99MHz U 8544.99MHz U
Gr# 3 : 8564.99MHz U 8574.99MHz U 2214.99MHz U 2224.99MHz U
Gr# 4 : 2234.99MHz U 2264.99MHz U 2294.99MHz U 2304.99MHz U
Enter Frequency Group# ----> 1 <== select one of groups
All frequency mode is selected!
Enter Clock Offset (sec) ----> 0
Enter Clock Rate (s/s) ----> 0
Clock offset and rate : 0 0
Clock Epoch : 0/000 00:00:00
X Clock offset against UTC : 0.000000
Enter UT1-UTC (sec) ----> 0
Enter Wobb X (arcsec) ----> 0
Enter Wobb Y (arcsec) ----> 0

ut1,wobbx,wobby : 0.000000 0.000000 0.000000

# of scans --- 289
Enter Start Scan number ----> 1
Enter Stop Scan number ----> 2
Scan range : 1 - 2

1 2015002020045 3C345 0 0 0
Apriori File ( ../corrapri/ape0020001RG.txt ) created
2 2015002020520 3C454.3 0 0 0

Apriori File ( ../corrapri/ape0020002RG.txt ) created

Total # of a-priori files created is 2

$
```

Edit an a-priori file by a text editor if necessary.

3.1.7 Example (in case of VDIF format for X and Y stations, but multi-thread data consisting of single-CH/thread data for Y station)

```

$ apri_calc ../sked/q19311.skd -apedir ../work -formX VDIF 16M2B8C -formY VDIF 16M2B1C
          -threadY MULTI

apri_calc (Ver. 2019-12-03)

=====
RUN CONDITION =====
K5 file naming type is Type 1 : sidDDDDNNNN.dat (SKED deflt)
Sub-net mode ON : PRT is set according to each scan length
X station data format : VDIF
Y station data format : VDIF
Output directory : ../work
=====

***** Schedule File Information *****
File name --- ../sked/q19311.skd
File type --- SKED
Exp. code --- Q19311
# of stations --- 2

```

```

      M V
# of stars --- 88
# of scans --- 28
1st Scan : 2019/11/07 10:00:00 2229+695
Last Scan : 2019/11/07 10:59:15 0805+410
*****  

----- STATION ID TABLE -----
M --- MK-VLBA
V --- WETTZELL  

Enter Station ID for X station ----> M
Enter Station ID for Y station ----> V
Selected Baseline is M-V
Sampling Information is as follows
      from schedule file      from operator
MK-VLBA : 16MHz 2bit 8CH      16MHz 2bit 8CH
WETTZELL : 16MHz 2bit 8CH      16MHz 2bit 1CH  

Enter data directory for X station (MK-VLBA)
---> ./
Enter data directory for Y station (WETTZELL)
---> ./
Data directory for X station (MK-VLBA) : ./
Data directory for Y station (WETTZELL) : ./
Frequency group, frequency, sideband, polarization based on MK-VLBA are
Gr# 1 : 8365.75 MHz U 8445.75 MHz U 8805.75 MHz U 8925.75 MHz U
Gr# 2 : 2232.75 MHz U 2262.75 MHz U 2372.75 MHz U 2392.75 MHz U
Select Frequency Group#(s) (e.g. 1 [2 3 4 ...]) or 0 for all ----> 0
All frequency mode is selected!
Enter Clock Offset (sec) ----> 0
Enter Clock Rate (s/s) ----> 0
Clock offset and rate : 0 0
Clock Epoch : 0/000 00:00:00
X Clock offset against UTC : 0
Enter UT1-UTC (sec) ----> 0
Enter Wobb X (arcsec) ----> 0
Enter Wobb Y (arcsec) ----> 0
ut1,wobbx,wobby : 0.000000 0.000000 0.000000
# of scans --- 28
Enter Start Scan number ----> 1
Enter Stop Scan number ----> 1
Scan range : 1 - 1
      1 201931100020 2229+695          0          0          0
Apriori File ( ../work/ape3110001MV.txt ) created
Total # of a-priori files created is 1

```

A-priori file created is as follows.

```

** This is Apriori file made by apri_calc Ver. 2019-12-03
** for cor, cor_all, fx_cor, and fx_cor_all
**
** (X clock offset wrt UTC is not reflected to a-priori values)
**
** SUBNET ON: PRT is set according to each scan length
**
** Clock parameters at run are as follows,
** Clock Offset (s) : 0.000000
** Clock Rate (s/s) : 0.000000
** Clock Epoch       : 0000/000 00:00:00
**
$EXPCODE
Q19311
$OBS_NUMBER
1
$STATION1
MK-VLBA ./M3110001
$FORMAT1
VDIF 16MHz 8CH 2bit
$XYZ-STATION1
-5464074.952510 -2495249.107380 2148296.843470
$STATION2
WETTZELL ./V3110001

```

```

$FORMAT2
VDIF 16MHz 1CH 2bit <= Note that # of CHs should be 1 because of single-CH/thread data!
$XYZ-STATION2
4075539.899410 931735.270250 4801629.351850
$BASEID
MV
$FRQ_GRP(1-2)
0
$FREQUENCY
8365750000.0 U 1 1 -- (0-0)      <== inside ( ) shows thread#s for X and Y data
8445750000.0 U 2 2 -- (0-1)
8805750000.0 U 3 3 -- (0-2)
8925750000.0 U 4 4 -- (0-3)
2232750000.0 U 5 5 -- (0-4)
2262750000.0 U 6 6 -- (0-5)
2372750000.0 U 7 7 -- (0-6)
2392750000.0 U 8 8 -- (0-7)
$PCAL_FREQ
10000.0
10000.0
10000.0
10000.0
10000.0
10000.0
10000.0
10000.0
$CLOCK
OFST= 0.000000
RATE= 0.000000
XCOF= 0.000000
$SOURCE
2229+695
$RA
22 30 36.46970500
$DEC
69 46 28.07690000
$EPOCH
2000.0
$GHA
14 34 58.530000
$EOP
UT1-UTC= 0.000000
X_WOBB = 0.000000
Y_WOBB = 0.000000
$START
2019311100000
$STOP
2019311100040
$APRIORI
PRT=2019311100020
TAU0= -2.210227274619678e-03
TAU1= -7.220902109727506e-07
TAU2= -3.243827760964927e-11
TAU3= 3.811317364141309e-15
$END

```

3.2 skdchk

“skdchk” reads a schedule file (SKED or VEX format) and display station, source, scan information and compute the size of necessary disk space.

The analysis method of the \$CODES block in the SKED file is improved at Ver.2019-12-21 and later. Option ‘-LEGACY’ is added to keep a backward compatibility.

3.2.1 How to execute

skdchk sked_file [-NOEARLY] [-LEGACY]
 where sked_file - schedule file name
 -NOEARLY - ignore "tape early start" parameter
 -LEGACY - use old method to analyze \$CODES block of SKED file
 to keep compatibility with the version before 2019-12-21.

3.2.2 Examples

```
$ skdchk jd0306.skd
skdchk Ver 2.31      2016-10-12
Schedule file is jd0306.skd

*** SCHEDULE FILE (jd0306.skd) INFORMATION ***
Experiment code : JD0306
Number of stations : 8
  1 T TSUKUB32 -3957408.751200  3310229.346600  3737494.836000
  2 A AIRA -3530219.322300  4118797.541900  3344015.905900
  3 C CHICHI10 -4490618.469200  3483908.166600  2884899.205700
  4 J SINTOTU3 -3642141.844800  2861496.642500  4370361.717900
  5 R KASHIM11 -3997505.701700  3276878.404550  3724240.703140
  6 Y GIFU11 -3787123.360830  3564181.693760  3680274.907440
  7 H TOMAKO11 -3680586.301730  2917515.745560  4300987.652680
  8 K YAMAGU32 -3502535.908490  3950950.219310  3566374.002980

Number of stars : 114
(only 20 stars are listed here)
  1 0003-066      $ 1.557887 -6.393149 2000.000000
  2 0014+813      $ 4.285312 81.585593 2000.000000
  3 0048-097      $ 12.672156 -9.484781 2000.000000
  4 0059+581      $ 15.690677 58.403094 2000.000000
  5 0104-408      $ 16.687950 -40.572211 2000.000000
  6 0106+013      $ 17.161546 1.583421 2000.000000
  7 0111+021      $ 18.429771 2.371477 2000.000000
  8 0119+115      $ 20.423313 11.830670 2000.000000
  9 0119+041      $ 20.486924 4.373537 2000.000000
 10 0133+476      $ 24.244145 47.858083 2000.000000
 11 0201+113      $ 30.944404 11.579280 2000.000000
 12 0202+149      $ 31.210058 15.236401 2000.000000
 13 0208-512      $ 32.692502 -51.017192 2000.000000
 14 0229+131      $ 37.941225 13.381866 2000.000000
 15 0235+164      $ 39.662209 16.616465 2000.000000
 16 0316+413      3C84 49.950667 41.511695 2000.000000
 17 0336-019      CTA26 54.878907 -1.776612 2000.000000
 18 0355+508      NRA0150 59.873947 50.963934 2000.000000
 19 0402-362      $ 60.973958 -36.083865 2000.000000
 20 0405-385      $ 61.745981 -38.441123 2000.000000

Number of scans : 209
First 5 scans are as follows:
  1   CTA26 3/197 02:00:00  310
  2 1803+784 3/197 02:06:10  784
  3   4C39.25 3/197 02:19:50  100
  4 0727-115 3/197 02:23:10  180
  5 0537-441 3/197 02:26:40  190

Last 5 scans are as follows:
 205 1044+719 3/198 01:22:20  430
 206 0552+398 3/198 01:33:30  160
 207 0202+149 3/198 01:37:00  784
 208 0133+476 3/198 01:50:30  550
 209 0537-441 3/198 02:00:40  180

Early Start Parameter (sec) : 0

Maximum Disk requirements
  Total observation time (sec) = 76038
  Disk requirements
    32Mbps : 304.152 GBytes
    64Mbps : 608.304 GBytes
   128Mbps : 1216.608 GBytes
   256Mbps : 2433.216 GBytes

Disk Requirements by Station (GBytes)
=====
```

	TSUKUB32	AIRA	CHICHI10	SINTOTU3	KASHIM11	GIFU11	TOMAKO11
sec	46018	65066	65976	37808	76038	76038	76038

#scans	200	186	189	169	209	209	209
32Mbps	184.1	260.3	263.9	151.2	304.2	304.2	304.2
64Mbps	368.1	520.5	527.8	302.5	608.3	608.3	608.3
128Mbps	736.3	1041.1	1055.6	604.9	1216.6	1216.6	1216.6
256Mbps	1472.6	2082.1	2111.2	1209.9	2433.2	2433.2	2433.2

Disk Requirements by Station (GBytes)

YAMAGU32

sec	29012
#scans	78
32Mbps	116.0
64Mbps	232.1
128Mbps	464.2
256Mbps	928.4

4 Correlation software

4.1 fx_cor, fx_cor_new, cor, cor_new

“fx_cor” and “fx_cor_new” are FX-type software correlator and carry out cross correlation processing using an apriori file. “cor” and “cor_new” are XF-type software correlator dedicated to 1-bit AD data. Correlated data are output to a file with a “cout” format. Auto-correlation or cross correlation with zero apriori value are also available.

“fx_cor” and “cor” are dedicated to K5/VSSP format data, but “fx_cor_new” and “cor_new” can process a variety of data formats, such as Mark5B, VDIF, ADS, OCTAD besides K5/VSSP.

In case of processing geodetic VLBI data with 1-bit sampling with 32 lags, “cor” or “cor_new” are faster than “fx_cor” or “fx_cor_new”.

4.1.1 How to execute

Type 1: normal correlation processing

“fx_cor” can be “fx_cor_new”, “cor”, or “cor_new”.

`fx_cor afile [options]`

where	<i>afile</i>	-	a-priori file name
	<i>options</i> (any order)		
	-integ <i>integration_time</i>	-	set total integration period (sec) default is scan length described in a schedule file in case of negative value, absolute value means integration exceeding scheduled scan length.
	-coffset <i>clock_offset</i>	-	set clock offset (sec) applied for fringe search purpose. Positive value means Y clock tic earlier than X clock tic. Default is 0.0
	-crate <i>clock_rate</i>	-	set clock rate (s/s) difference between X and Y station clock applied for fringe search purpose. Default is 0.0
	-soffset <i>start_offset</i>	-	set start time offset (integer second)
	-t1pp <i>t1pp</i>	-	PP (parameter period) (sec) for correlation processing. Default is BT1PP in “cor_head.h” (usually 1.0) see Note 1 for available <i>t1pp</i> less than 1 sec.
	-pp_nosync	-	turns off the synchronization mode of PP (parameter period) (default is that PP synchronize to second tic)
	-lag <i>delsize</i>	-	set the size of delay lag window by a power of 2, e.g., 16, 32, 64, 128, 256, 512, 1024, 2048, Default is DELAYSIZE in “cor_head.h” (usually 32)
	-pmode <i>pmode</i>	-	set plot device mode 0: XWINDOW (env PGDISP can change PG PLOT display device) and PostScript file (pgplot.ps or gnuplot.ps) out (default) 1: PostScript file (pgplot.ps or gnuplot.ps) out only 2: XWINDOW only -1: no graphic output
	-comment “ <i>any comment</i> ”	-	set comment appeared in a correlation function plot
	-nopcal	-	suppress PCAL (phase calibration) signal detection
	-ch1 <i>ch1Y</i>	-	define Y channel for X CH# 1 (default 1)
	-ch2 <i>ch2Y</i>	-	define Y channel for X CH# 2 (default 2)
	-ch3 <i>ch3Y</i>	-	define Y channel for X CH# 3 (default 3)
	-ch4 <i>ch4Y</i>	-	define Y channel for X CH# 4 (default 4)

Note: in case of “fx_cor_new” and “cor_new”, options upto ‘-ch16 *ch16Y*’ are available

-orule *naming_rule*

- set naming rule of output file name
 - 0 : use program default (“cout.txt” for “fx_cor” and “fx_cor_new”, “coutt.txt” for “cor” and “cor_new”)
 - 1 : coutNNNN.txt for “fx_cor” and “fx_cor_new”
couttNNNN.txt for “cor” and “cor_new” (default)
where NNNN : serial number (4 digits)
 - 2 : coutEXP_CODE/coutYYDDDDNNNNXYG.txt for “fx_cor”
and “fx.cor_new”
couttEXP_CODE/coutYYDDDDNNNNXYG.txt for “cor”
and “cor_new”
where EXP_CODE – experiment code
YY – year (2 digits)
DDD – total day (3 digits)
NNNN – scan# (4 digits)
XY – baseline ID (2 or 4 letters)
G – frequency group (a|b|c|d) or null
 - 3 : coutYYDDDDNNNNXYG.txt for “fx_cor” and “fx_cor_new”
couttYYDDDDNNNNXYG.txt for “cor” and “cor_new”
where YY – year (2 digits)
DDD – total day (3 digits)
NNNN – scan# (4 digits)
XY – baseline ID (2 or 4 letters)
G – frequency group (a|b|c|d) or null
- odir *outdir* – set output file directory.
System default is environmental variable K5COUT. If K5COUT is not defined, program default defined by COUTDFLT in “cor_head.h” is used (usually “./cout”)
- frstep *frstep* – set fringe phase calculation step in samples
 - 0 – automatic calculation
 - 1 – every 1 sample
 - 8 – every 8 samples (default)
 - N – every N samples (1000/ N should be integer)
default is FRSTEP_FX_COR (in “cor_head.h”)
- frauto
- rfoffset *rf_offset*
- cout *cout_file* – set output file name compulsory. If this parameter is set, naming rule and out directory are ignored.
- fall *pcalf*
- f1 *pcalf1*
- f2 *pcalf2*
- f3 *pcalf3*
- f4 *pcalf4* – set PCAL frequency of all channels compulsory (kHz)
- Note: in case of “fx_cor_new” and “cor_new”, options upto ‘-f16 pcalf16’ are available
- 1ch *x-ch* [*y-ch*] – set 1 channel processing mode
 - x-ch* – CH# of X station
 - y-ch* – CH# of Y station
- ==== belows are options for “fx_cor” and “fx_cor_new” ====
 - modefr *modefr* – set fringe stopping approximation mode
 - 0 – no approximation (exact calculation)
 - 9 – 9 level approximation (default)
 - 2 – 2 level approximation
 - 3 – 3 level approximation
 - hanning
 - hamming
 - bpf *flow:fhigh[:fact][,flow:fhigh[:fact][,flow:fhigh[:fact][,.....]]]* – set BPF (bandpass filter) parameters by lower and upper cut-off frequencies (upto 20 sets)

flow – lower cut-off frequency in a baseband (MHz)
fhigh – upper cut-off frequency in a baseband (MHz)
fact – amplitude coefficient (0.0–1.0) default is 1.0
-bpf2 *fc:bw[:fact][,fc:[bw][:fact][,fc:[bw]:fact][,...]]*
 – set BPF (bandpass filter) parameters by center frequency and bandwidth (upto 20 sets)
fc – center frequency of BPF in a baseband (MHz)
bw – bandwidth (MHz). it can be omitted in case of the same value with the previous one
fact – amplitude coefficient (0.0–1.0) default is 1.0
-fres *fres*
 – set frequency resolution in case of BPF processing. Default is automatic set up.
-delpcal *ch#:fs[:fi][,ch#:fs[:fi][,...]]*
 – set PCAL signal frequencies to reject by channel
ch# – channel number (starting from 1)
fs – lowest frequency of PCAL signals in baseband (MHz)
fi – interval of PCAL signals (MHz)
 frequencies of PCAL signals removed are
 $fs, fs + fi, fs + 2fi, fs + 3fi, \dots$
 when *fi* is omitted, only *fs* is removed
 bandwidth of rejection filter is double the resolution of FFT
 this can be changed by option ‘-pcalbw’ below
 or
-delpcal *delpcal_file* – set file name which describes PCAL signal rejection information
-pcalbw *bwmhz* – bandwidth of PCAL rejection filter (MHz)
 default bandwidth is double the resolution of FFT
 === belows are options for “fx_cor_new” ===
-e2bit *mode* – set 2-bit AD decoding method for X and Y data
 0 – default
 1 – (0, 1, 2, 3) offset binary (VDIF default)
 2 – (0, 2, 1, 3) Mark-5B default
 3 – (1, 0, 2, 3) singed integer
 Note: This option is valid for VDIF or Mark-5B data
-e2bitx *mode* – set 2-bit AD decoding method for X data
-e2bity *mode* – set 2-bit AD decoding method for Y data

Note 1: Contents of file set by option ‘-delpcal *delpcal_file*’ is as follows

```

*** PCAL signal rejection filter file ***
** for option ’-delpcal’ of fx_cor_new
**
** usage -delpcal DELPCAL.txt
**
** Format Ver. 2019-08-27
**
** ch# sFreq(MHz) intFreq(MHz)
** where
**   ch# : channel # (starting from 1)
**   0 means for all channel
**   sFreq : lowest PCAL frequency in channel (MHz)
**   intFreq : interval of PCAL signal (MHz)
**   Note-- rejected PCAL frequency is sFreq, sFreq+intFreq, sFreq+2*intFreq, ....
** [example]
**   ch# sFreq(MHz) intFreq (MHz)
**   0      0.01      5.0
**   set for all channel same parameter
**
**   or
**   1      1.4      5.0
**   2      8.4      5.0
**   3      2.4      5.0
**   4      4.4      5.0
**   set different start frequency for every channel
**
** CH# sFreq(MHz) intFreq(MHz)

```

1	0.4	5.0
2	3.4	5.0
3	4.4	5.0
4	0.4	5.0
5	4.4	5.0
6	1.4	5.0
7	4.4	5.0
8	2.4	5.0

*

Note 2: Valid values as *t1pp* are as follows.

sampling frequency	PP period (sec)						
	0.01	0.02	0.04	0.05	0.1	0.2	0.5
40kHz	×	OK	OK	×	OK	OK	OK
100kHz	×	×	OK	×	×	OK	×
200kHz	×	OK	OK	×	OK	OK	OK
500kHz	×	×	OK	×	×	OK	×
1MHz	×	OK	OK	×	OK	OK	OK
2MHz	OK	OK	OK	OK	OK	OK	OK
4MHz	OK	OK	OK	OK	OK	OK	OK
8MHz	OK	OK	OK	OK	OK	OK	OK
16MHz	OK	OK	OK	OK	OK	OK	OK
32MHz	OK	OK	OK	OK	OK	OK	OK
64MHz	OK	OK	OK	OK	OK	OK	OK

Type 2: old style

`fx_cor afile [sekibun soffset coffset roffset t1pp smode pp-mode delsize zoom pmode comment]`

- where *afile* - a-priori file name
- sekibun* - total integration period (sec)
 default or 0 is scan length described in a schedule file
 in case of negative value, absolute value means integration exceeding
 scheduled scan length.
- soffset* - start time offset (integer second)
- coffset* - clock offset (sec) applied for fringe search purpose. Positive value
 means Y clock tic earlier than X clock tic. Default is 0.0
- roffset* - clock rate (s/s) difference between X and Y station clock applied for
 fringe search purpose. Default is 0.0
- t1pp* - PP (parameter period) (sec) for correlation processing. Default is
 BT1PP in "cor_head.h" (usually 1.0)
 see Note 1 above for available *t1pp* less than 1 sec.
- smode* - delay search range (no more use)
 0: Maximum (200000 samples)
 1: Middle (10000 samples)
 2: Minimum (1000 or 2000 samples)
 default is 2 but no more use!
- pp-mode* - synchronization mode of PP
 0: PP synchronize to second tic (default)
 1: PP does not synchronize to second tic
- delsize* - size of delay lag window (a power of 2)
 e.g., 16, 32, 64, 128, 256, 512, 1024, 2048,
 0 means DELAYSIZE in "cor_head.h" (usually 32)
- tzoom* - time axis zoom ratio in graphics (integer)
 0: full scale (default) as same as 1
 -VE : Max position is automatically centered. VE is a zoom factor.
- pmode* - plot device selection

0	: XTERM (environmental variable PGDISP can change PG-PLOT display device) and PostScript file (pgplot.ps or gnuplot.ps) out (default)
1	: PostScript file (pgplot.ps or gnuplot.ps) out only
2	: XWINDOW only
-1	: no graphic output

comment – comment appeared in a correlation function plot

Type 3: auto-correlation mode

`fx.cor k5file1 [k5file2] [options]`

where *k5file1* – data file name
k5file2 – 2nd data file name. If directory is omitted in *k5file2*, directory is considered to be the same as that of *k5file1*. If 2nd data file name is omitted, *k5file1* is used for both X and Y data file. Note: A-priori values are all set to zero. Frequencies are all set to zero.
options – *options* given in Type 1 is available to use

This mode corresponds to use a-priori file as follows.

```
** This is Apriori file for auto correlation
**

$EXPCODE
APE_ZERO

$STATION1
STATION1 k5file1

$STATION2
STATION2 k5file2

$FREQUENCY
0.0 U
0.0 U
0.0 U
0.0 U

$PCAL_FREQ
0.0
0.0
0.0
0.0

$CLOCK
OFST= 0.0
RATE= 0.0

$SOURCE
APE_ZERO

$START
0000000000000000

$STOP
0000000000000000

$APRIORI
PRT=0000000000000000
TAU0= 0.0
TAU1= 0.0
TAU2= 0.0
TAU3= 0.0

$END
```

Monitoring environmental variables

Environmental variables used in software correlator are as follows.

K5COUT – default directory for correlation data out

K5APRIDIR – default directory for apriori file
 RGDISP– PGPLOT display device name t

They can be checked by
 fx_cor env

4.1.2 Example: “cor”

Use default value except for a-priori file.

```
$ cor ./apeXY10.txt      <== ‘‘apeXY10.txt’’ is an a-priori file located in the
                           current directory

***** run parameters (Ver 2014.8.13 or later)*****
afile = ./apeXY10.txt
Total Integ Period (sec) = 0.000000 (0.0 means integrated as scheduled)
T1PP (sec) = 1.000000 PP_sync mode = 0 (PP sync to 1sec tic)
Lag Window Size = 32 Search_mode = 2
Start Offset (sec) = 0
Clock Offset (sec) = 0.000000e+00 Clock Rate(s/s) = 0.000000e+00
PCAL Detection : ON
Graphic Out Mode = 0 (PostScript Out + DISPLAY) tzoom = 1
comment = (null)
loop_param = 0 (for regular processing)
ch assign = (1 - 1) (2 - 2) (3 - 3) (4 - 4)
*****
ApeMonit: APRIORI file is NEW VERSION
ApeMonit: EXPCODE JD0306
ApeMonit: OBS_NUMBER 8
ApeMonit: KASHIM11 /home/kondo/data/testspeed/Xk5data.10.dat
ApeMonit: XYZ -3997505.701700 3276878.404550 3724240.703140
ApeMonit: TOMAK011 /home/kondo/data/testspeed/Yk5data.10.dat
ApeMonit: XYZ -3680586.301730 2917515.745560 4300987.652680
ApeMonit: BASEID RH
ApeMonit: PRT 2003 197 2 41 10
ApeMonit: START 2003 197 2 41 5
ApeMonit: STOP 2003 197 2 41 15
ApeMonit: Frequency Table
ApeMonit: Ch1 8209990000.000000 U
ApeMonit: Ch2 8219990000.000000 U
ApeMonit: Ch3 8249990000.000000 U
ApeMonit: Ch4 8309990000.000000 U
ApeMonit: PCAL Frequency Table
ApeMonit: Ch1 10000.000000
ApeMonit: Ch2 10000.000000
ApeMonit: Ch3 10000.000000
ApeMonit: Ch4 10000.000000
ApeMonit: Frequency Group# 1
ApeMonit: Aprioris
ApeMonit: Tau0 1.540623e-04
ApeMonit: Tau1dot 1.153642e-07
ApeMonit: Tau2dot -1.169617e-12
ApeMonit: Tau3dot -6.131427e-16
ApeMonit: Clock offset 2.485000e-06
ApeMonit: Clock rate 0.000000e+00
ApeMonit: X Clock offset 0.000000e+00
ApeMonit: UT1-UTC (sec) 0.000000
ApeMonit: X-WOBB (asec) 0.000000
ApeMonit: Y-WOBB (asec) 0.000000
ApeMonit: Star 3C273B
ApeMonit: RA 12 29 6.69973194
ApeMonit: DEC 2 3 8.59818480
ApeMonit: EPOCH 2000.0
ApeMonit: GHA 9 46 11.12600000
Directory ../cout already existed!
corr_engine: Version 2011-03-22
corr_engine: maxpp,idsize,irsizex,chsizex, smode 2048 32 2048 4 2
corr_engine: X Data File is /home/kondo/data/testspeed/Xk5data.10.dat
corr_engine: Y Data File is /home/kondo/data/testspeed/Yk5data.10.dat
checkheader: Header (K5/VSSP) Sync Detected!!
checkheader: File : /home/kondo/data/testspeed/Xk5data.10.dat
checkheader: A/D(bits) 1 CHs 4 SFreq(kHz) 8000 Time 02:41:05 sec 9665
```

```

checkheader: Header (K5/VSSP) Sync Detected!!
checkheader: File : /home/kondo/data/testspeed/Yk5data.10.dat
checkheader: A/D(bits) 1 CHs 4 SFreq(kHz) 8000 Time 02:41:05 sec 9665
corr_engine: << runmode (runmode) = 1
corr_engine: << smode (smode) = 2
corr_engine: << # of samples in a unit (usampl) = 4000
corr_engine: << lag size (idsize) = 32
corr_engine: << PP period in sec (t1pp) = 1.0
corr_engine: << # of usampl in a PP (nspp) = 2000
corr_engine: << # of usampl in 1 sec (imax) = 2000
corr_engine: << # of bytes in a usampl (numb) = 2000
corr_engine: << RF offset (Hz) = 0.000000
corr_engine: << Fringe stopping mode = 0 (base band)
xros_engine: << Fringe phase calc mode (modefr) = 3 (3 level approx)
corr_engine: << Fringe phase calc step (frstep) = 32 sample(s)
corr_engine: << Pcal detection mode X station = 1
corr_engine: << Pcal detection mode Y station = 1
corr_engine: << Channel Assignment = (1 - 1) (2 - 2) (3 - 3) (4 - 4)
corr_engine: << Temprary file for header : ./PNRo93hd.tmp
corr_engine: << Temprary file for PP data : ./agxDGypp.tmp
corr_engine: chdif_flag = 0
corr_engine: Atamadashi finished!
corr_engine: temporary info out file (./PNRo93hd.tmp) Opened!
corr_engine: temporary corr out file (./agxDGypp.tmp) Opened!
corr_engine: Start X data time : 9665.000000
corr_engine: Start Y data time : 9665.000000
checkheader: Header (K5/VSSP) Sync Detected!!
checkheader: File : /home/kondo/data/testspeed/Yk5data.10.dat
checkheader: A/D(bits) 1 CHs 4 SFreq(kHz) 8000 Time 02:41:06 sec 9666
corr_engine: PP# 1 data saved
corr_engine: Time elapsed for 1PP processing is 1.029115 sec
corr_engine: X data time (BOPP) : 9665.000000
corr_engine: processed data (1.0/10.0)
checkheader: Header (K5/VSSP) Sync Detected!!
checkheader: File : /home/kondo/data/testspeed/Xk5data.10.dat
checkheader: A/D(bits) 1 CHs 4 SFreq(kHz) 8000 Time 02:41:06 sec 9666
checkheader: Header (K5/VSSP) Sync Detected!!
checkheader: File : /home/kondo/data/testspeed/Yk5data.10.dat
checkheader: A/D(bits) 1 CHs 4 SFreq(kHz) 8000 Time 02:41:07 sec 9667
corr_engine: PP# 2 data saved

```

.....

```

corr_engine: PP# 9 data saved
corr_engine: Time elapsed for 1PP processing is 1.026757 sec
corr_engine: X data time (BOPP) : 9673.000000
corr_engine: processed data (9.0/10.0)
checkheader: Header (K5/VSSP) Sync Detected!!
checkheader: File : /home/kondo/data/testspeed/Xk5data.10.dat
checkheader: A/D(bits) 1 CHs 4 SFreq(kHz) 8000 Time 02:41:14 sec 9674
checkheader: File EOF! (/home/kondo/data/testspeed/Yk5data.10.dat)
corr_engine: Time-elapsed per PP (sec) MIN=1.026757 MAX=1.029326
Postscript out file ==> pgplot.ps <== postscript faile name created
=====
```

CH#	FREQ(MHz)	MAX AMP	RESIDUAL DELAY (sec)
1	8209.99	0.001041	-5.69519e-09
2	8219.99	0.000707	-5.19374e-08
3	8249.99	0.000933	4.58736e-09
4	8309.99	0.000835	2.86532e-08

```

COUT File is ../cout/couttt0006.txt <== correlator output file
Time elapsed (sec) for One obs process is 13.000000
$
```

Fig.4.1 is displayed after processing.

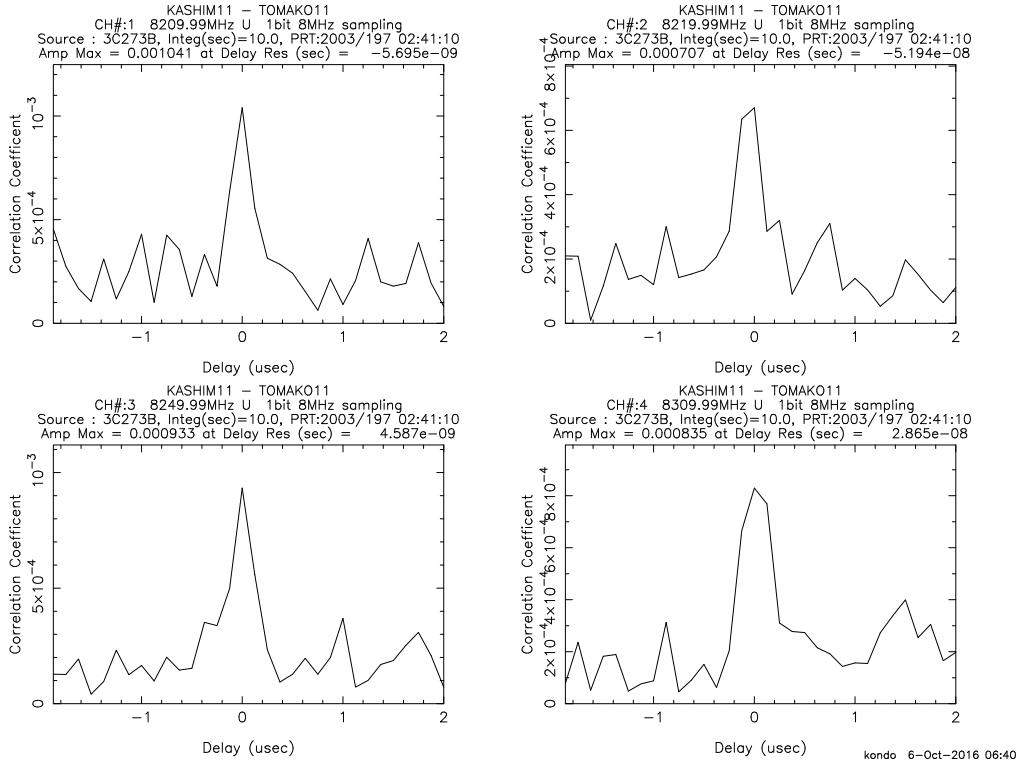


Figure 4.1. Examples of correlation function plot after “fx_cor” and “cor” processing

4.1.3 Example: “fx_cor_new” (Mark5B data)

Default values are used except for a-priori file.

```
$ fx_cor_new ./ape220205919RG.m5b.txt <== use a-priori file prepared for Mark5B
*****
run parameters (Ver 2014.8.13 or later)*****
afile = ./ape220205919RG.m5b.txt
Total Integ Period (sec) = 0.000000 (0.0 means integrated as scheduled)
T1PP (sec) = 1.000000 PP_sync mode = 0 (PP sync to 1sec tic)
Lag Window Size = 32 Search_mode = 2
Start Offset (sec) = 0
Clock Offset (sec) = 0.000000e+00 Clock Rate(s/s) = 0.000000e+00
PCAL Detection : ON
Graphic Out Mode = 0 (PostScript Out + DISPLAY) tzoom = 1
comment = (null)
loop_param = 0 (for regular processing)
ch assign = (1 - 1) (2 - 2) (3 - 3) (4 - 4)

BPF parameters
modebpf = 0
Frequency resolution (MHz) (0 means AUTO) : 0.000000
*****
ApeMonit: APRIORI file is NEW VERSION
ApeMonit: EXP CODE K10216
.....
engine_datafile_open: # of channels to be processed is 16
xros_engine: << runmode (runmode) = 1
xros_engine: << smode (smode) = 2
xros_engine: << # of samples in a unit (usampl) = 1000
xros_engine: << lag size (idsize) = 32
xros_engine: << FFT size for processing = 32
xros_engine: << Lag Window Type = Box
xros_engine: << PP period in sec (t1pp) = 1.0
xros_engine: << # of usampl in a PP (nspp) = 32000
```

```

xros_engine: << # of usamp1 in 1 sec (imax)      = 32000
xros_engine: << # of bytes   in a usamp1 (numb)  = 2000
xros_engine: << # of bytes   in a usamp1 per CH = 125
xros_engine: << RF offset (Hz)                   = 0.000000
xros_engine: << Fringe stopping mode            = 0 (base band)
xros_engine: << Fringe phase calc mode (modefr) = 9 (9 level approx)
xros_engine: << Fringe phase calc step (frstep) = 8 sample(s)
xros_engine: << Pcal detection mode X station = 1
xros_engine: << Pcal detection mode Y station = 1
xros_engine: << # of channels to be processed = 16
xros_engine: << X data file format             = Mark-5B 32MHz 1BIT 16CH <==
                                         data format information
xros_engine: << Y data file format             = Mark-5B 32MHz 1BIT 16CH
xros_engine: << Channel Assignment = (1 - 1) (2 - 2) (3 - 3) (4 - 4)
xros_engine:                               (5 - 5) (6 - 6) (7 - 7) (8 - 8)
xros_engine:                               (9 - 9) (10 - 10) (11 - 11) (12 - 12)
xros_engine:                               (13 - 13) (14 - 14) (15 - 15) (16 - 16)
xros_engine: << Channel Picked Up   = (1 - 1) (2 - 2) (3 - 3) (4 - 4)
xros_engine:                               (5 - 5) (6 - 6) (7 - 7) (8 - 8)
xros_engine:                               (9 - 9) (10 - 10) (11 - 11) (12 - 12)
xros_engine:                               (13 - 13) (14 - 14) (15 - 15) (16 - 16)
xros_engine: << Temprary file for header : ./qRYFBChd.tmp
xros_engine: << Temprary file for PP data : ./q2WioCpp.tmp
xros_engine: << FFT is carried out using FFTW3.0 package
xros_engine: chdif_flag = 0
xros_engine: Atamadashi finished!
xros_engine: temporary info out file (./qRYFBChd.tmp) Opened!
xros_engine: temporary corr out file (./q2WioCpp.tmp) Opened!
xros_engine: Start X data time : 75559.000000
xros_engine: Start Y data time : 75559.000000
xros_engine: PP# 1 data saved

.....
xros_engine: PP# 7 data saved
xros_engine: Time elapsed for 1PP processing is 45.787053 sec
xros_engine: X data time (BOPP) : 75565.000000
xros_engine: processed data (7.0/30.0)
m5b_sync_detect: File EOF! (./R220205919.m5b)
xros_engine: Time-elapsed per PP (sec) MIN=45.747727 MAX=45.791488
Postscript out file ==> pgplot.ps
=====
```

CH#	FREQ(MHz)	MAX AMP	RESIDUAL DELAY (sec)
1	7700.99	0.000834	-4.24985e-11
2	7710.99	0.000935	1.00162e-09
3	7720.99	0.000748	3.14188e-09
4	7850.99	0.000892	1.04695e-09
5	8090.99	0.000854	4.31266e-09
6	8290.99	0.000832	1.02798e-08
7	8490.99	0.000883	7.45903e-09
8	8550.99	0.000833	1.06133e-08
9	8570.99	0.000830	1.49527e-08
10	8580.99	0.000757	1.01071e-08
11	2210.99	0.001171	1.84406e-08
12	2220.99	0.001119	1.64464e-08
13	2240.99	0.001125	1.6231e-08
14	2290.99	0.001223	2.18096e-08
15	2330.99	0.001218	1.84975e-08
16	2340.99	0.001376	1.57303e-08

=====

```

COUT File is ./cout/cout0005.txt
Time elapsed (sec) for One obs process is 333.220641
$
```

Fig.4.2 is displayed after processing.

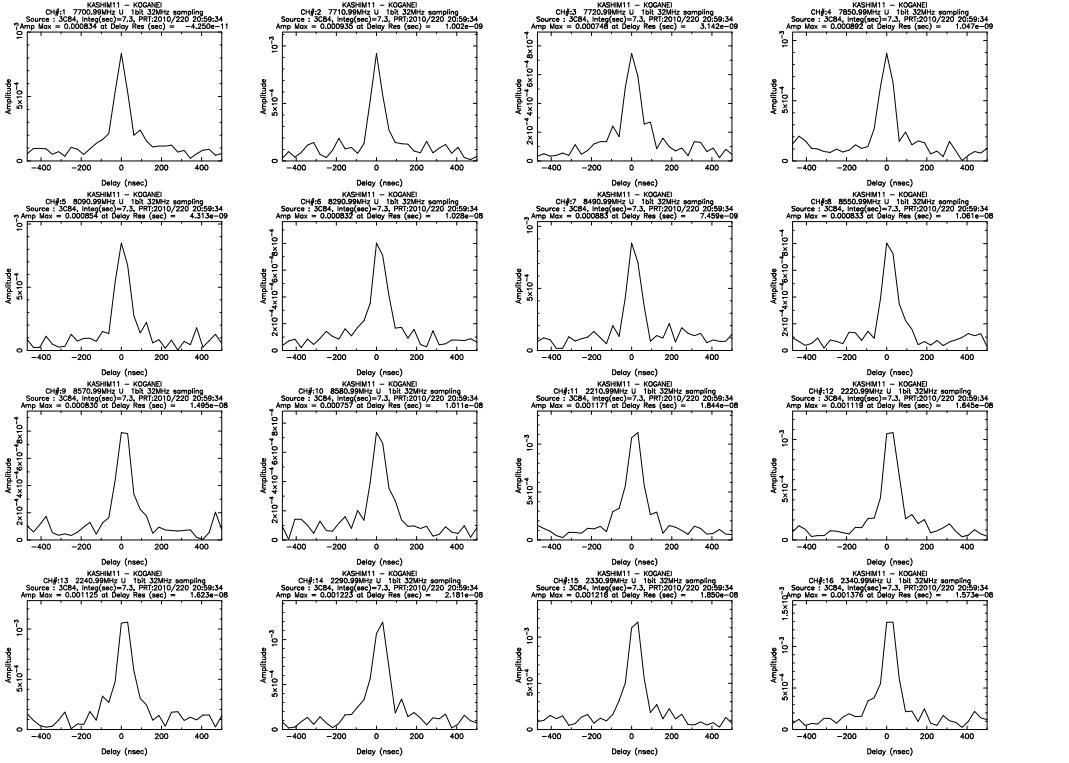


Figure 4.2. Plot of correlation function after "fx_cor_new" processing.

4.2 fx_cor_all, fx_cor_all_new, cor_all, cor_all_new

“fx_cor_all” is “fx_cor” for two or more scan data using a list file that contains a number of a-priori file names. “fx_cor_all_new” is “fx_cor_new” for two or more scan data. So do “cor_all” and “cor_all_new”.

An example of how to create a list file is as follows.

An example:

At the directory where a-priori files are located, issue

```
ls -1 ape*.txt > apelist2940U.txt
```

4.2.1 How to execute

“fx_cor_all” can be “fx_cor_all_new” or “cor_all_new” in bellow.

`fx_cor_all pfile [options]`

- where *pfile* – list file name
 - options* (any order)
 - integ *integration_time* – total integration period (sec)
default is scan length described in a schedule file
in case of negative value, absolute value means integration exceeding scheduled scan length.
 - coffset *clock_offset* – set clock offset (sec)
Positive value menas Y clock tic earlier than X clock tic. Default is 0.0
 - crate *clock_rate* – set clock rate (s/s) difference between X and Y station clock. Default is 0.0.
 - soffset *start_offset* – set start time offset (integer second)
デフォルトは 0
 - t1pp *t1pp* – PP (parameter period) (sec) for correlation processing. Default is BT1PP in ”cor_head.h” (usually 1.0)
 - pp_nosync – turns off the synchronization mode of PP (parameter period) (default is that PP synchronize to second tic)
 - lag *delsize* – set the size of delay lag window by a power of 2, e.g., 16, 32, 64, 128, 256, 512, 1024, 2048,
Default is DELAYSIZE in “cor_head.h” (usually 32)
 - pmode *pmode* – set plot device mode
 - 0: XWINDOW (env PGDISP can change PG PLOT display device)
and PostScript file (pgplot.ps or gnuplot.ps) out (dfault)
 - 1: PostScript file (pgplot.ps or gnuplot.ps) out only
 - 2: XWINDOW only
 - 1: no graphic output
 - comment “*any comment*” – set comment appeared in a correlation function plot
 - nopcal – suppress PCAL (phase calibration) signal detection
 - ch1 *ch1Y* – define Y channel for X CH# 1 (default 1)
 - ch2 *ch2Y* – define Y channel for X CH# 2 (default 2)
 - ch3 *ch3Y* – define Y channel for X CH# 3 (default 3)
 - ch4 *ch4Y* – define Y channel for X CH# 4 (default 4)
- Note: in case of “fx_cor_new” and “cor_new”, options upto ‘-ch16 *ch16Y*’ are available
- orule *naming_rule*
 - set naming rule of output file name
 - 0 : use program default (“cout.txt” for “fx_cor” and “fx_cor_new”, “coutt.txt” for “cor” and “cor_new”)
 - 1 : coutNNNN.txt for “fx_cor” and “fx_cor_new”
couttNNNN.txt for “cor” and “cor_new” (default)

where NNNN : serial number (4 digits)
 2 : coutEXP_CODE/coutYYDDDNNNNXYG.txt for “fx_cor”
 and “fx_cor_new”
 couttEXP_CODE/coutYYDDDNNNNXYG.txt for “cor”
 and “cor_new”
 where EXP_CODE – experiment code
 YY – year (2 digits)
 DDD – total day (3 digits)
 NNNN – scan# (4 digits)
 XY – baseline ID (2 or 4 letters)
 G – frequency group (a|b|c|d) or null
 3 : coutYYDDDNNNNXYG.txt for “fx_cor” and “fx_cor_new”
 couttYYDDDNNNNXYG.txt for “cor” and “cor_new”
 where YY – year (2 digits)
 DDD – total day (3 digits)
 NNNN – scan# (4 digits)
 XY – baseline ID (2 or 4 letters)
 G – frequency group (a|b|c|d) or null

- odir *outdir* – set output file directory.
System default is environmental variable K5COUT. If K5COUT is not defined, program default defined by COUTDFLT in “cor_head.h” is used (usually “..//cout”)
- frstep *frstep* – set fringe phase calculation step in samples
 - 0 – automatic calculation
 - 1 – every 1 sample
 - 8 – every 8 samples (default)
 - N* – every *N* samples ($1000/N$ should be integer)
default is FRSTEP_FX_COR (in “cor_head.h”)
- frauto – set *frstep*=0 (automatic calculation mode)
- rfoffset *rf_offset* – set RF frequency difference between Y and X (RFy-RFx)(Hz)

==== belows are options for “fx_cor_all” and “fx_cor_new_all” ===

- modefr *modefr* – set fringe stopping approximation mode
 - 0 – no approximation (exact calculation)
 - 9 – 9 level approximation (default)
 - 2 – 2 level approximation
 - 3 – 3 level approximation
- hanning – use Hanning lag window
- hamming – use Hamming lag window

4.3 sdelay

“sdelay” carries out coarse search of residual delay and delay rate from correlation data.

4.3.1 How to execute

Type 1: help

sdelay HELP|

Type 2: interactive operation

sdelay [PP] [*options*]

where PP – to make each PP output. See Type 4 for *options*.

Type 3: non-interactive operation

sdelay *coutfile* [PP] [*options*]

where *coutfile* – K5 software correlator output file. See Type 4 for *options*.

Type 4: general operation

sdelay [*options*]

where *options* (any order)

- v
 - cout *coutfile*
 - sdir *coutdir*
 - cdir *coutdir*
 - ppout
 - nosingle
 - odir *outdir*
 - pgplot *device*
 - ps
 - 2nd [*t2dot*]
 - fringe
 - pcal
 - vspeplot
 - no3d
 - noplots
 - integ *tinteg*
 - vanvleck
 - out *ofile*
 - classic
 - tzoom *tzoom*
 - tshift *tshift*
 - verbose
 - set correlator output file (cout file) name
 - set search start cout file directory to read
 - set cout file directory to process all
The differnce between -sdir and cdir is as follows,
-sdir : set search start directory
-cdir : set cout directory to process all files
 - make output file of each PP data by every channel besides normal sdelay out file.
 - force output to multiple files (default: all results are output in a single file)
 - sdelay output directory
 - set PGPLOT device (/NULL for suppression)
 - set graphics out to PostScript (pgplot.ps or gnuplot.ps)
 - search up to 2nd order rate and set search range from $-t2dot$ to $+t2dot$
(default for $t2dot$ is $1^{-13}\text{s}/\text{s}^2$)
 - plot fringe phase and amplitude
 - plot PCAL phase and amplitude
 - plot video cross spectrum and output spectrum data to “vspe-out.txt” file
 - suppress plot of coarse search function
 - suppress all graphics plots
 - force integration time to *tinteg* sec. (default is all available period)
 - make Van Vleck correction using $r = \sin(r_c * \pi/2)$ where r is true correlation coefficient, and r_c is coefficient for 1-bit samplig data.
This option will be neglected in case of multi-bit AD data.
 - output 2D array data to a text file besides normal sdelay out
 - classic axis style (no tic marks) for 3D plots
 - delay axis zoom-up factor ($tzoom \geq 1.0$)
 - delay axis shift value when *tzoom* is set (sec) (set new center value for delay axis).

-bpf *flow:fhigh[:fact][,flow:fhigh[:fact][,flow:fhigh[:fact][,.....]]]*
 – set BPF by lower and higher cut-off frequencies (upto 20 sets)
flow – lower cut-off frequency in a baseband (MHz)
fhigh – higher cut-off frequency in a baseband (MHz)
fact – amplitude factor (0.0–1.0), default is 1.0

-bpf2 *fc:bw[:fact][,fc:[bw][:fact][,fc:[bw]:fact][,.....]]*
 – set BPF parameters by center frequency and bandwidth (upto 20 sets)
fc – center frequency in a baseband (MHz)
bw – pass bandwidth (MHz). It can be omitted for 2nd and later BPF if it is the same bandwidth with the 1st one.
fact – amplitude factor (0.0–1.0), default is 1.0

-fres *fres*
 – set frequency resolution (MHz) (deflt is automatic)

-delpcal *ch#:fs[:fi][,ch#:fs[:fi][,.....]]*
 – set PCAL signal frequencies to reject by channel
ch# – channel number (starting from 1)
fs – lowest frequency of PCAL signals in baseband (MHz)
fi – interval of PCAL signals (MHz)
 frequencies of PCAL signals removed are
fs, fs + fi, fs + 2fi, fs + 3fi, ...
 when *fi* is omitted, only *fs* is removed
 bandwidth of rejection filter is double the resolution of FFT (# of FFT is double the # of lags at correlation processing)
 this can be changed by option ‘-pcalbw’ below

or

-delpcal *delpcal_file*
-pcalbw *bwmhz*
-line[mode]
-hanning
-lag[size] lag
-sub[panels] 1|4|9|16
-nodel[ay_correction]
-obs[out]

4.3.2 Example

```
$ sdelay

SDELAY Ver. 2016-08-12
# of cout files found under ..\cout\ ----- 107
# of cout directories found under ..\cout\ ---- 51
  1 --- Go to File selection
  2 --- Go to further directory selection
Enter your selection --> 2      <==== select 2
Software correlator out directories are as follows
  1 cout
  2 cout021550R
  3 cout021550Rold
  4 cout021550U
  5 cout021550U2
  6 cout021550Uold
  .....
 33 coutCs7200
 34 coutD03C1
 35 coutGIFU
 36 coutGSI
```

```

37 coutJD0306
38 coutJD0609
.....
48 cout_tid06202GY
49 cout_tid06202GY_8sec
50 cout_tid062020G
51 cout_tid062020Y
Select directory --> 36      ===== select 36
Selected directory is ..\cout\coutGSI\
Soft correlator out files are as follows
1 coutt040970001ACa.txt
2 coutt040970001ACb.txt
3 coutt040970001ACc.txt
4 coutt040970001ACd.txt
5 coutt040970001TAa.txt
6 coutt040970001TAb.txt
.....
28 coutt042420001TVd.txt
29 coutt042420002TVa.txt
30 coutt042420002TVb.txt
31 coutt042420002TVc.txt
32 coutt042420002TVd.txt
Select File (0 means all) --> 5      ===== select 5
coutt040970001TAa.txt is selected!
sdelay: output file is .\sdelay.txt
sdelay: correlation data file is ..\cout\coutGSI\coutt040970001TAa.txt
fx_cor_out_hd_read: Data File format 7

***** SDELAY (Ver. 2016-08-12) SUMMARY OUT PUT *****
COUT      : ..\cout\coutGSI\coutt040970001TAa.txt
X DATA    : /vncpc1/ad2/JD0404/T097020000a.dat
Y DATA    : /vncpc1/ad4/JD0404/A097020000a.dat
BASELINE  : TSUKUB32 - AIRA
SOURCE    : 3C454.3          SAMPLING : 1 bit   8 MHz
PRT       : 2004/097 02:00:50  Tinteg(s) : 99.0
LAG SIZE  : 32
CLOCK     : offset -1.085e-006(s)  rate -4.542e-014(s/s)
EOP       : ut1-utc -0.439965(s)
           : x-wobb -0.140730(asec)
           : y-wobb 0.333260(asec)
=====
CH#  FREQUENCY      AMP MAX      POSITION      RESIDUAL
(MHz)          (MHz)          ( 64x 128)    Delay(usec)  Rate(ps/s)  SNR
-----
1    8209.99 U  2.757e-003 ( 33, 65)      0.000    0.016    77.6
2    8219.99 U  2.822e-003 ( 33, 65)     -0.012    0.019    79.4
3    8249.99 U  2.732e-003 ( 33, 65)     -0.013   -0.038    76.9
4    8309.99 U  2.627e-003 ( 33, 65)      0.014    0.028    73.9
=====
Note: No amplitude correction is made.
=====
===== PCAL SUMMARY =====
CH#  PCAL FREQ(kHz)      X-Amp  X-Phase      Y-Amp  Y-Phase
-----
1    10.00            0.027  132.8      0.062  45.5
2    10.00            0.028  89.4       0.061  -4.1
3    10.00            0.028 -45.4       0.061 -115.5
4    10.00            0.028 161.1       0.060  155.1
*****
Outfile is .\sdelay.txt

```

A coarse search function shown in Fig.4.3 will be displayed. Figs.4.4 , 4.5 , and 4.6 show PGPlot graphics plots in case of options “-fringe” (phase and amplitude by PP), “-pcal” (PCAL phase and amplitude), and “-vspeplot” (video spectrum), respectively.

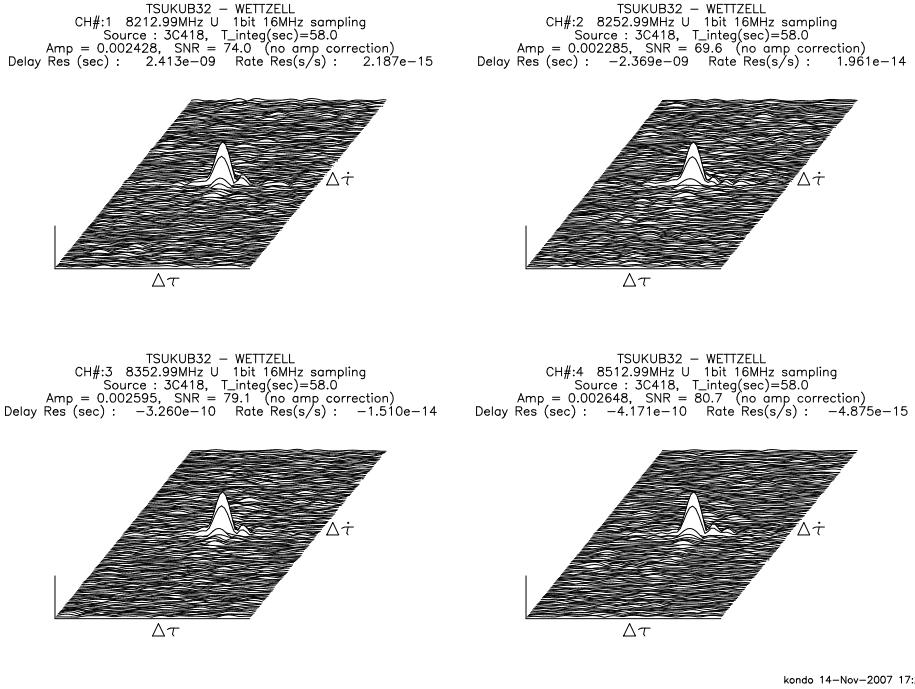


Figure 4.3. An example of graphics plots (coarse search function).

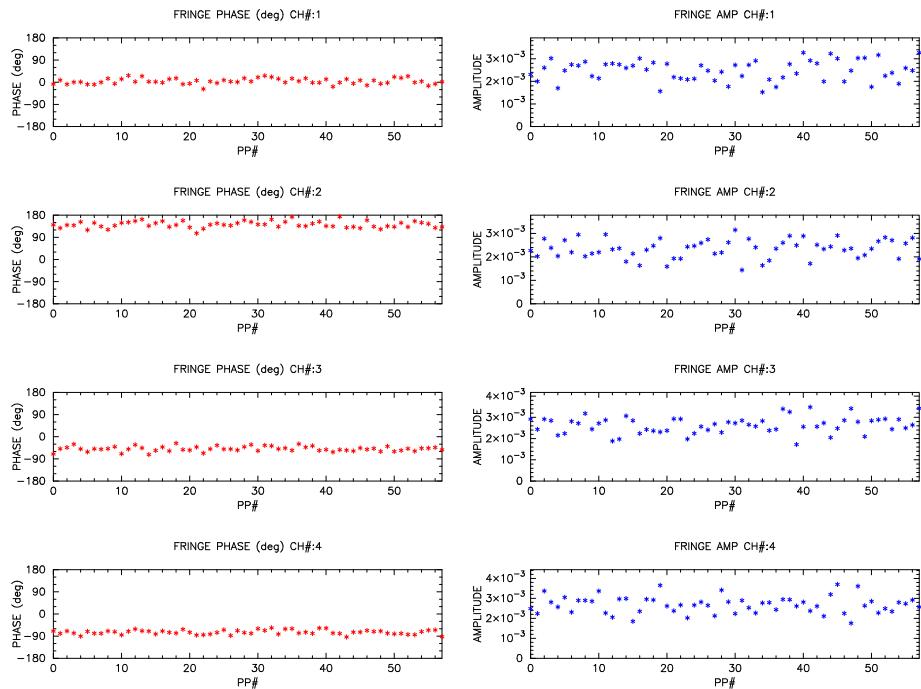


Figure 4.4. An example of sdelay graphics in case of “-fringe” option (fringe phase and amplitude by PP).

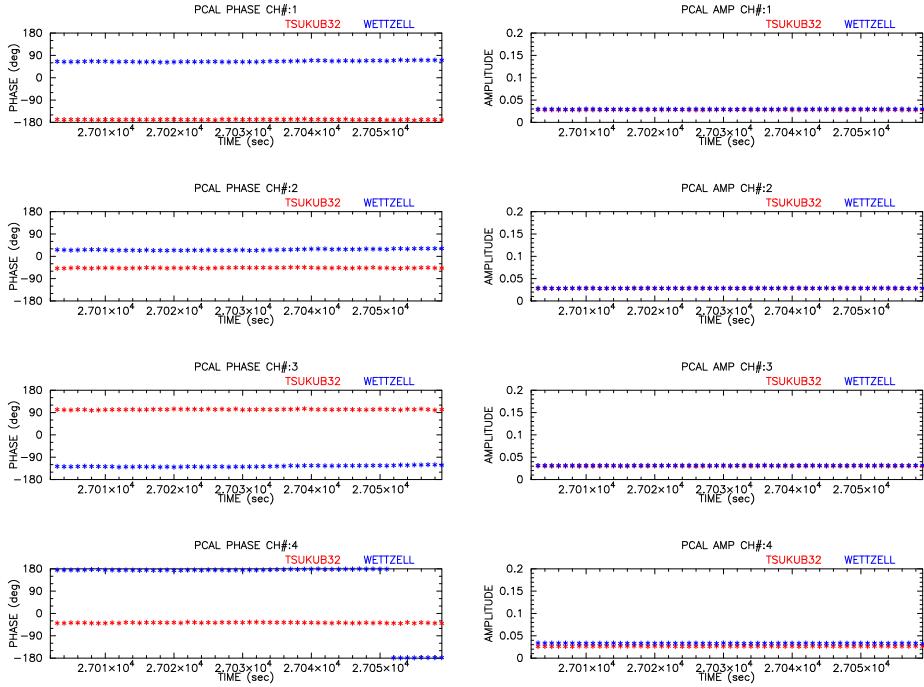


Figure 4.5. An example of *sdelay* graphics in case of “-pcal” option (PCAL phase and amplitude by PP).

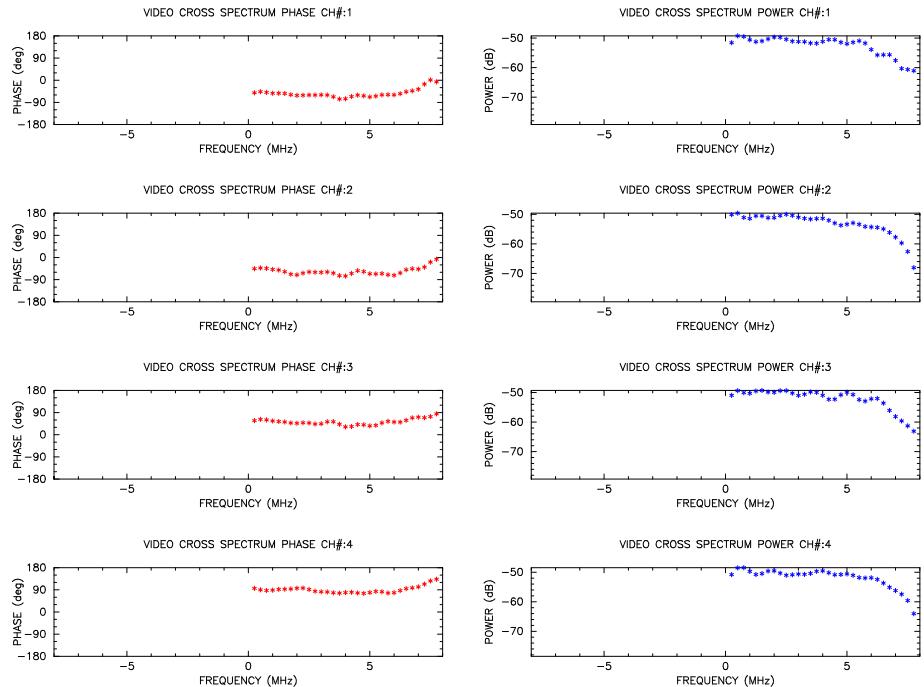


Figure 4.6. An example of *sdelay* graphics in case of “-vspeplot” option (video spectrum).

An example of text file (vspeout.txt9 output in case of “-vspeplot” option.

```
$FORMAT Ver. 2016-12-19
$OBS
```

```

$BASELINE      HITACHI YAMAGU32
$PRT          2016 300 2 32 30
$PRT (sec in day) 9150.000000
$SOURCE        NRAO512C
$SAMPLING(Hz)  1.6e+07
$VIDEO_BW(Hz)  8e+06
$A/D(bits)    2
$NUMBER of PP 300
$SEKIBUN(s)   300.000000
$APRIORI (TAU(s),TAU1dot(s/s),TAU2dot,TAU3dot)
0.00157071683582578 -1.36274927453641e-07 -5.78903382882255e-12 7.24618531073368e-16
$CLOCK (offset(s),rate(s/s))
3.75e-06 0
$FLAG_DELAY_CORRECTION 1
$RESULTS BY CHANNEL
$CHANNEL# 1
$RESULTS freq(MHz), amp, residual_delay(s), err, residual_rate(s/s), err, res_t2dot(s/s^2)
6664.000000 0.00120704 3.07581e-08 8.24096e-10 4.30251e-12 3.2977e-15 0
$VIDEO SPECTRUM INTEGRATED COHERENTLY
$ video freq(Hz) real-part imag-part amp phase(deg)
-8.000e+06 0.000e+00 0.000e+00 0.000e+00 0.000
-7.750e+06 0.000e+00 0.000e+00 0.000e+00 0.000
-7.500e+06 0.000e+00 0.000e+00 0.000e+00 0.000
.....
-5.000e+05 0.000e+00 0.000e+00 0.000e+00 0.000
-2.500e+05 0.000e+00 0.000e+00 0.000e+00 0.000
0.000e+00 0.000e+00 0.000e+00 0.000e+00 0.000
2.500e+05 -1.557e-04 5.830e-04 6.034e-04 104.950
5.000e+05 -1.930e-04 1.234e-03 1.249e-03 98.886
.....
7.250e+06 2.905e-04 6.031e-04 6.694e-04 64.285
7.500e+06 1.522e-04 4.461e-04 4.714e-04 71.156
7.750e+06 1.468e-05 2.098e-04 2.103e-04 85.997

```

Figs.4.7, 4.8, 4.9, and 4.10 examples of GNUPLOT graphics.

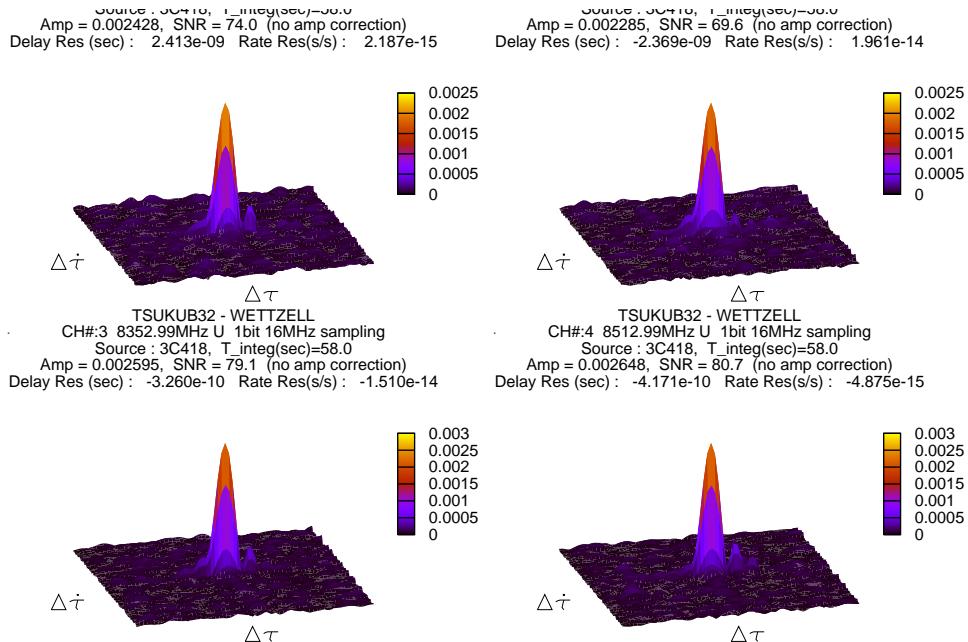


Figure 4.7. plot of coarse search function (GNUPLOT)

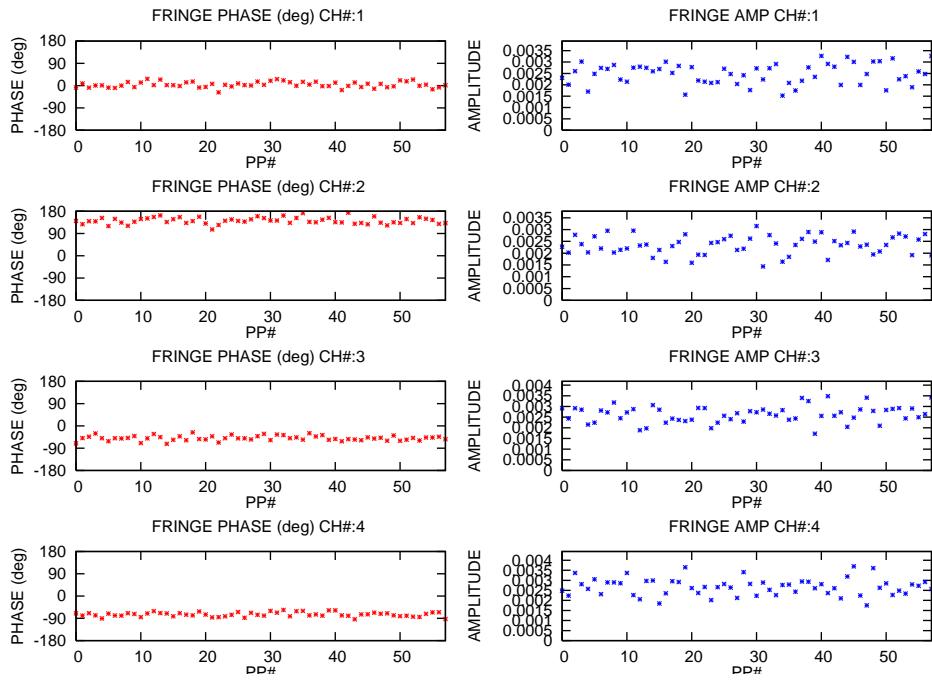


Figure 4.8. An example of *sdelay* graphics in case of “-fringe” option (fringe phase and amplitude by PP)(GNUPLOT)

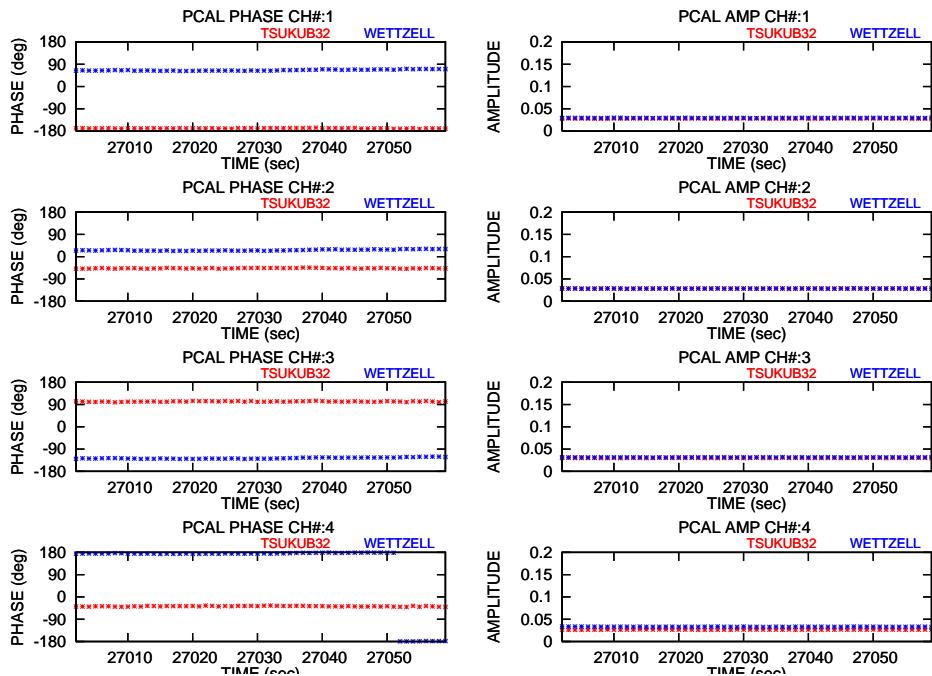


Figure 4.9. An example of *sdelay* graphics in case of “-pcal” option (PCAL phase and amplitude by PP)(GNUPLOT).

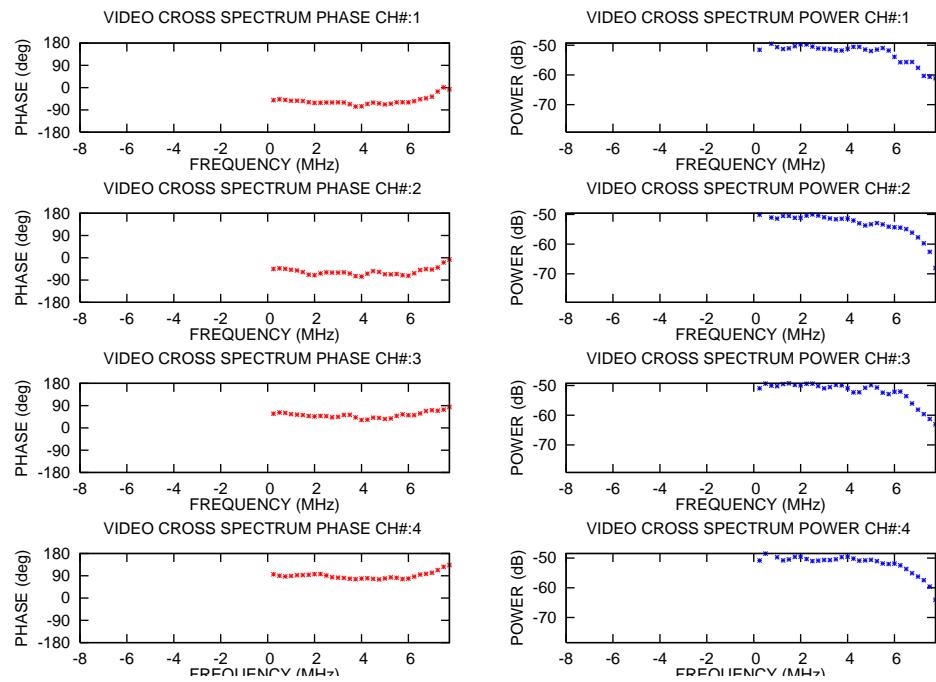


Figure 4.10. An example of *sdelay* graphics in case of “-vspeplot” option (video spectrum)(GNUPLOT).

4.3.3 Output file format

Default output file

file name — “sdelayout.txt” or the name ‘cout’ in correlator output file name substituted by ‘sdel’.

Example: correlator output file name = coutt0205.txt ==> generated sdelay output file = sdelt0205.txt

Contents of file are as follows.

```
$OBS
$BASELINE      KASHIM11 TOMAK011
$PRT          2003 197 2 41 10
$SOURCE        3C273B
$SAMPLING(Hz) 8e+06
$VIDEO_BW(Hz) 4e+06
$A/D(bits)    1
$NUMBER of PP 9
$SEKIBUN(s)   9.000000
$APRIORI (TAU(s)) TAU1dot(s/s) TAU2dot TAU3dot)
0.00015406231 1.1536424e-07 -1.1696165e-12 -6.1314267e-16
$CLOCK (offset(s),rate(s/s))
2.485e-06 0
$RESULTS Freq(MHz) AMP Res_Delay(s) Err Res_Rate(s/s) Err Res_2dot(s/s^2) Res_Phase(deg)
8209.99 0.00185916 1.96904e-09 8.73712e-09 4.40734e-13 4.7298e-13 0       65.52
8219.99 0.00139373 -1.03363e-08 1.16548e-08 3.30101e-12 6.3016e-13 0       96.38
8249.99 0.00169796 1.62224e-08 9.56661e-09 5.54919e-13 5.15374e-13 0       114.36
8309.99 0.00188501 -9.87243e-09 8.6173e-09 5.99579e-13 4.6088e-13 0       -114.79
$OBSERVED Freq(MHz) Observed_Delay(s) Observed_Rate(s/s) Total_Phase(deg)
8209.99 0.000154064279043935 1.15364680734089e-07 134.03
8219.99 0.000154051973685111 1.15367541008296e-07 342.32
8249.99 0.00015407853240548 1.15364794919007e-07 240.92
8309.99 0.00015405243756551 1.15364839579305e-07 322.84
```

Output file by PP

file name — ‘cout’ in correlator output file name is substituted by ‘sdel’ + ‘.CH1’~‘.CH4’.

Example: correlator output = coutt0205.txt ==> generated sdelay output = sdelt0205.txt.CH1, ..., sdelt0205.txt.CH4

Contents of file are as follows.

```
$FORMAT Ver. 2017-02-24
$OBS
$BASELINE      KASHIM11 TOMAK011
$PRT          2003 197 2 41 10
$PRT (sec in day) 9670.000000
$SOURCE        3C273B
$SAMPLING(Hz) 8e+06
$VIDEO_BW(Hz) 4e+06
$A/D(bits)    1
$NUMBER of PP 9
$SEKIBUN(s)   9.000000
$APRIORI (TAU(s)), TAU1dot(s/s), TAU2dot, TAU3dot)
0.00015406231 1.1536424e-07 -1.1696165e-12 -6.1314267e-16
$CLOCK (offset(s),rate(s/s))
2.485e-06 0
$RESULTS freq(MHz), amp, residual_delay(s), err, residual_rate(s/s), err, res_t
2dot(s/s^2)
8209.990000 0.00185916 1.96904e-09 8.73712e-09 4.40734e-13 4.7298e-13 0
$Obtained Tau0,Tau1,Tau2,Tau3
0.000154064279043935 1.153646807e-07 -1.1696165e-12 -6.1314267e-16
$AVERAGED X-PCAL AMP and PHASE(deg), Y-PCAL AMP and PHASE(deg)
0.0688 70.362 0.1595 111.713
$Total PP number and PP period in sec 9 1.000000
$REFERENCE FREQUENCY(MHz) 8209.990000
$ EACH PP DATA
$ Date      MOPP_Time           tau(sec)        amp      phs(deg)  xpamp  xpphs(deg)
ypamp  ypphs(deg)
2003/07/16 02:41:05.50 1.5354512615e-04 0.0013034785 85.446 0.0682 71.240
0.1594 111.211
2003/07/16 02:41:06.50 1.5366049550e-04 0.0014538306 88.053 0.0692 73.339
0.1600 111.025
2003/07/16 02:41:07.50 1.5377586369e-04 0.0020580706 50.928 0.0678 71.786
0.1590 114.300
--- continue upto # of PPs
```

Output of 2D array data

file name — name specified by ‘-out *ofile*’ option

Contents of file are as follows.

```
TSUKUB32 - WETTZELL
CH#:1 2344.99MHz U 1bit 16MHz sampling
Source : 4C39.25, T integ(sec)=54.0
Amp = 0.004531, SNR = 133.2 (no amp correction)
Delay Res (sec) : -2.631e-008 Rate Res(s/s) : 8.603e-013
***** 2D DATA START *****
128 64 <== array size line (rate direction) X column (delay direction)
6.12758e-005 4.88404e-005 6.13282e-005 ... <== line#1 64 point data
5.81745e-005 6.01026e-005 5.68238e-005 ... <== line#2 64 point data
...
3.73513e-005 9.13274e-006 4.24058e-005 ... <== line#128 64 point data
***** 2D DATA END *****

TSUKUB32 - WETTZELL
CH#:2 2352.99MHz U 1bit 16MHz sampling
Source : 4C39.25, T integ(sec)=54.0
Amp = 0.004311, SNR = 126.7 (no amp correction)
Delay Res (sec) : -2.184e-008 Rate Res(s/s) : 1.112e-012
***** 2D DATA START *****
128 64
..... <== start of CH\#2 data
.....
```

4.4 cor_mon

“cor_mon” displays correlation function dynamically
(Note: only PGPLOT is supported.)

4.4.1 How to execute

cor_mon *file_name* [*options*]

where <i>file_name</i>	- correlator output file name (either cout format or KSP format)
-z[oom] <i>zoom</i>	- zooming factor in delay direction
-a[max] <i>ampmax</i>	- set maximum amplitude (default is 0.001)
-d[range] <i>t1 t2</i>	- set delay range from <i>t1</i> to <i>t2</i> (sec) if this option is set, “-z” option is neglected
-h[alt]	- stop display by PP (default is continuous display)
-s[msec] <i>sleep_msec</i>	- suspend time (msec) between plots in case of continuous display (default is 200 msec)
-ch <i>ch#1[,ch#2[,ch#3[,ch#4[,...]]]]</i>	- set display channel (example: -ch 1, 4, 3) (default is all channels)

4.4.2 Example

Fig.4.11 shows an example of 16 channel correlation functions.

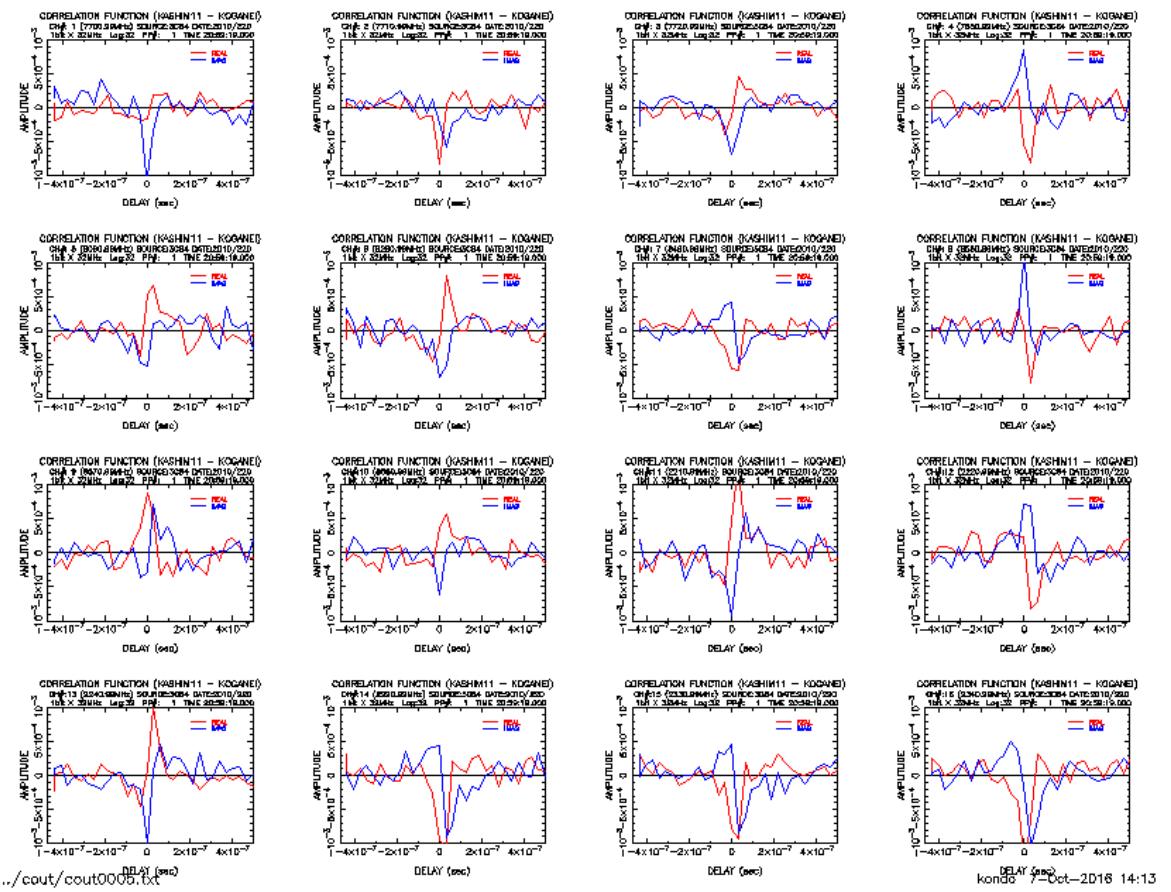


Figure 4.11. An example of correlation function displayed by “cor_mon”. Red lines shows a real part and blue lines an imaginary part.

5 Data check utilities

5.1 oscillo

“oscillo” displays time series of sampling data dynamically (dedicated to K5/VSSP format and PG PLOT)

5.1.1 How to execute

oscillo *file_name* [*options*]

- | | |
|----------------------------|---|
| where <i>file_name</i> | - sampling data file name with K5/VSSP format |
| -t[span] <i>tspan</i> | - time axis span (sec) |
| -h[alt] | - stop display by a sweep (default is continuous display) |
| -s[msec] <i>sleep_msec</i> | - suspend time (msec) between plots in case of continuous display
(default is 0) |

5.1.2 Example

Fig.5.1 shows an example of display in case of 64MHz×2bit×4ch sampling data.

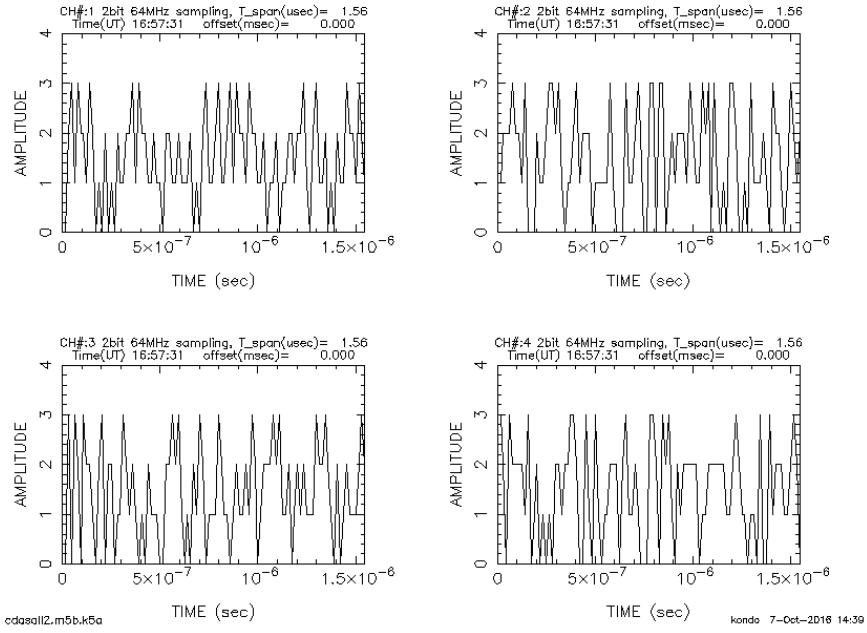


Figure 5.1. Time series plots displayed by “oscillo” for 64MHz×2bit×4ch sampling data.

5.2 speana

“speana” displays spectrum of sampling data (dedicated to K5/VSSP format)

5.2.1 How to execute

speana *data_file* [*options*]

where	<i>data_file</i>	-	sampling data file name with K5/VSSP format
	<i>options</i> (any order)		
	-m[ode] <i>mode</i>	-	axis mode <i>mode</i> : <i>YX</i> <i>X</i> : X (frequency) axis mode =0: log scale =1: linear scale (default) <i>Y</i> : Y (amplitude) axis mode =0: log scale (default) =1: linear scale (common for all channels) =2: linear scale (independent for channels) -value : auto-correlation plot centered at <i>value</i> -1 : auto-correlation (full range)
	-pmode <i>pmode</i>	-	set plot device mode 0: XWINDOW and PostScript file (pgplot.ps or gnuplot.ps) (default) 1: PostScript file (pgplot.ps or gnuplot.ps) out only 2: XWINDOW only
	-se[kibun] <i>sekibun</i>	-	total integration period (sec)
	-ti[integration] <i>sekibun</i>	-	same as ‘-se’ option
	-i[integration] <i>sekibun</i>	-	same as ‘-se’ option
	-co[mment] <i>comment</i>	-	comment display in a plot
	-so[ffset] <i>soffset</i>	-	start time offset (default is 0.0)
	-to[ffset] <i>soffset</i>	-	same as ‘-so’ option
	-o[ffset] <i>soffset</i>	-	same as ‘-so’ option
	-f1[khz] <i>f1khz</i>	-	lower frequency of frequency axis (kHz) (default is 0.0)
	-f2[khz] <i>f2khz</i>	-	higher frequency of frequency axis (kHz) (default is a video frequency)
	-min[dbm] <i>mindbm</i>	-	minimum value of amplitude axis (dBm) (default is automatic)
	-max[dbm] <i>maxdbm</i>	-	maximum value of amplitude axis (dBm) (default is automatic)
	-nops	-	suppress Postscript file out (same as “-p 2”)

5.2.2 Example

Fig.5.2 shows an example of spectrum displayed by "speana" for 64MHz×2bit×4ch sampling data.

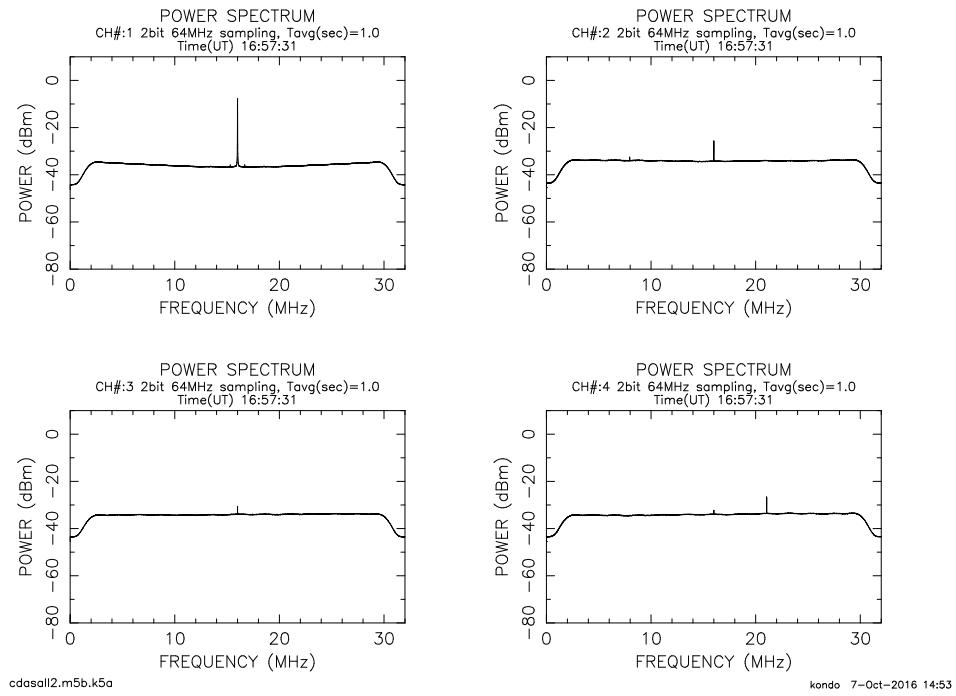


Figure 5.2. An example of spectrum plot displayed by “speana” for $64\text{MHz} \times 2\text{bit} \times 4\text{ch}$ sampling data

5.3 g-speana

“g-speana” displays spectrum of sampling data with a variety of data formats, such as, Mark-5B, VDIF, ADS, OCTAD besides K5/VSSP.

5.3.1 How to execute

`g-speana data-file [options]`

- □ □ `data-file` – sampling data file name with a variety of data formats (Mark-5B, VDIF, ADS, OCTAD, K5/VSSP)
- `options` (any order)
- `-m[ode] mode` – axis mode
 `mode` : `YX`
 `X`: X (frequency) axis mode
 =0: log scale
 =1: linear scale (default)
 `Y`: Y (amplitude) axis mode
 =0: log scale (default)
 =1: linear scale (common for all channels)
 =2: linear scale (independent for channels)
 `–value`: auto-correlation plot centered at `value`
 –1: auto-correlation (full range)
- `-pmode pmode` – set plot device mode
 0: XWINDOW and PostScript file (pgplot.ps or gnuplot.ps) (default)
 1: PostScript file (pgplot.ps or gnuplot.ps) out only
 2: XWINDOW only
- `-se[kibun] sekibun` – total integration period (sec)
- `-ti[integration] sekibun` – same as ‘-se’ option
- `-i[integration] sekibun` – same as ‘-se’ option
- `-co[mment] comment` – comment display in a plot

```

-so[ffset] soffset          - start time offset (default is 0.0)
-to[ffset] soffset          - same as '-so' option
-o[ffset] soffset          - same as '-so' option
-f1[khz] f1khz           - lower frequency of frequency axis (kHz) (default is 0.0)
-f2[khz] f2khz           - higher frequency of frequency axis (kHz) (default is a video frequency)
-min[dbm] mindbm         - minimum value of amplitude axis (dBm) (default is automatic)
-max[dbm] maxdbm         - maximum value of amplitude axis (dBm) (default is automatic)
-nops                         - suppress Postscript file out (same as "-p 2")
-1ch ch#                  - set 1 channel plot mode and set channel#
-4ch ch#1 ch#2 ch#3 ch#4 - set 4 channel plot mode and set channel numbers
-ch ch#1 ch#2 .....      - pick up any channels and plot them
-m5b | -vdif | -ads | -oct   - set sampling data format (deault is K5/VSSP supporting VSSP32 and VSSP64)

== following is in case of ADS format or M5B format ==
-numch numch             - set # of channels
-adbit adbit              - set AD resolution (bits)
-sf[req] sfMHz            - set sampling frequency (MHz)
-st[ime] YYYYDDDHMMSS | YYYY/DDD-HH:MM:SS - set start date and time of data in case of ADS format (default value is got from ADS file name)

```

5.3.2 Example

An example of spectrum of sampling data display with Mark5B format.

```

$ g_speana cdasall2.m5b -m5b      <== use '-m5b' to specify Mark5B format data.
                                         use '-vdif' for VDIF format data.
g_speana Ver. 2016-06-17 compiled with FFTW3.0
                                         compiled for PGPlot

Data File is cdasall2.m5b
File cdasall2.m5b opened (638349270 bytes)
Time(UT) MJD 226 16:57:31
  fname : cdasall2.m5b
  data file start time : Time(UT) MJD 226 16:57:31
  data pick-up start time : Time(UT) MJD 226 16:57:31
  sfkHz : 64000
  adbit : 2
  numch : 16
  plot numch : 16
  plot ch# : 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16
  sekibun : 1.000000
  ssoffset : 0.000000
CH# 1: Maximum data (dB, dBm) is -16.716162 -7.716162
CH# 2: Maximum data (dB, dBm) is -34.588219 -25.588217
CH# 3: Maximum data (dB, dBm) is -39.548599 -30.548597
CH# 4: Maximum data (dB, dBm) is -35.545822 -26.545824
CH# 5: Maximum data (dB, dBm) is -41.150509 -32.150509
CH# 6: Maximum data (dB, dBm) is -41.239742 -32.239742
CH# 7: Maximum data (dB, dBm) is -42.367371 -33.367371
CH# 8: Maximum data (dB, dBm) is -36.048561 -27.048559
CH# 9: Maximum data (dB, dBm) is -36.417774 -27.417774
CH# 10: Maximum data (dB, dBm) is -41.161625 -32.161625
CH# 11: Maximum data (dB, dBm) is -42.641129 -33.641129
CH# 12: Maximum data (dB, dBm) is -36.593994 -27.593994
CH# 13: Maximum data (dB, dBm) is -40.218788 -31.218788
CH# 14: Maximum data (dB, dBm) is -36.009422 -27.009422
CH# 15: Maximum data (dB, dBm) is -42.393009 -33.393009
CH# 16: Maximum data (dB, dBm) is -37.771706 -28.771704
All CH: Maximum and Minimum data (dBm) are -7.716162 -49.829594
Time elapsed for processing is 50.265196 sec
Created PostScript file ==> pgplot.ps
Type <RETURN> for next page:    <== at 1st spectra of 4 channels are displayed,
                                         then next 4 channels are displayed after
                                         hit a return key.
$
```

Fig.5.3 shows an example of spectrum displayed by “g_speana” for Mark5B format data (last 4 channels).

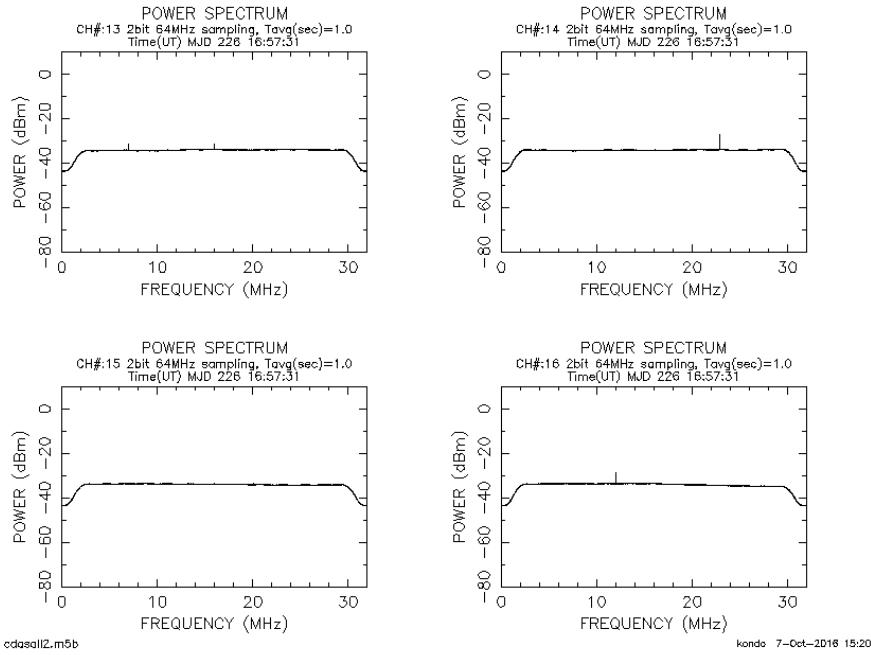


Figure 5.3. An example of spectrum displayed by g_speana for Mark5B format data (last 4 channels).

5.4 datachk

“datachk” checks K5/VSSP or K5/VSSP32 format data and outputs results to log files. Data are checked as follows. Bit-slip or bit-make is checked by counting the number of bits between adjacent headers of data. If bit-slip or bit-make is occurred, it is recorded in a log file. “datachk” can also check the percentage of positive sign of analog signals and can monitor the occurrence distribution of AD data by sampled value.

If AUX MISALIGN (misaligned AUX field) is found by this check, it can be recovered by using “aux_recov” program.

5.4.1 How to execute

`datachk file_name [mode [logfile [errlog [keepmode]]]] [option]`

where *file_name* – sampling data file name with K5/VSSP format (default is “tds.data”)
mode – statistics display mode
 0 : no display (default)
 display first and last frame information and errored frames only
 1 : display percentage of '+' sign data in analogue data
 2 : same as mode=0, but display all frames
 3 : display occurrence distribution by AD value by 1 second
 4 : display occurrence distribution of AD value for all data
logfile – log file name for summary output in case of mode=0. file name starting with '-' means append mode open (default is no output)
errlog – log file name to contain errors detected in data file for mode=0. This file will not be created in case of no error (default is no output) file name starting with '-' means append mode open

```

keepmode - set the mode of keeping data file when error occurred in case of
mode=0.
    0 : nothing to do (default)
    1 : rename to original_name+“.NNNN.err”
    2 : copy to original_name+“.NNNN.err”, where NNNN
        is 0001 to 9999. (this number is kept in
        “counter_file_datachk.tmp” under the current direc-
        tory
option
-s2 - set # of channels to 2 compulsory in case of K5/VSSP64 format
data.

```

5.4.2 Summary file

A summary file is generated when “datachk” is executed with *logfile* option. An example is as follows.

```

# File Name:
D:\IPVLBI\data\test02.dat
# FMT A/D CH f(kHz) LPF(MHz):
VS32 1 1 32000 16
# Start and Last Time:
2006/318 23:20:28 84028
2006/318 23:25:27 84327
# Duration:
300
# Byte offset of 1st header:
0
# STATISTICS total bad discon discon_with_bitflip aux_sep EFLG:
300 1 0 0 147 0
# BIT SLIP:
1 26432

```

5.4.3 Error log file

An error log file is generated when “datachk” is executed with *errlog* option. An example is as follows.

in case of *keepmode*=0

```

# Errrored Data File Name:
test02.dat
# FMT A/D CH f(kHz) LPF(MHz):
VS32 1 1 32000 16

```

in case of *keepmode*=1 (rename mode)

```

# Errrored Data File Name:
test02.dat
# FMT A/D CH f(kHz) LPF(MHz):
VS32 1 1 32000 16
# Renamed to:
test02.dat.0006.err

```

in case of *keepmode*=2 (copy mode)

```

# Errrored Data File Name:
test02.dat
# FMT A/D CH f(kHz) LPF(MHz):
VS32 1 1 32000 16
# Copied to:
test02.dat.0007.err

```

5.5 vdifcheck

“vdifcheck” checks contents of VDIF format data.

5.5.1 How to execute

vdifcheck vdif_file [*options*]

where <i>vdif_file</i>	- VDIF format data file name to check
<i>options</i> (any order)	
-f[ormat] 0 1 2 3 99	- set display format 0 : automatic according to VDIF format and edv# (default) 1 : legacy format 2 : same as mode=0, but edv# is not considered 3 : set edv# compulsory as that of KASHIMA 99 : for debug
-d[mode] 0 1 2	- set display mode 0 : display first and last frame only (default) 1 : display every frame 2 : display frame on the second besides first and last frames
-n[frame] <i>nmax</i>	- set # of frames to read
-l[egacy]	- set header length 16 bytes compulsory
-s[kip] <i>n</i>	- skip first <i>n</i> bytes data
-k[kashima] [<i>bytesframe</i>]	- set header format to Kashima format compulsory and set frame length <i>bytesframe</i> -bytes compulsory
-pup <i>thread_num</i>	- set pick up thread# (default 1st encountered thread)
-h[istogram]	- display occurrence probabilities by AD levels

5.5.2 Example

```
$ vdifcheck ./test_sv.vdif -h
*****
*      VDIF data check
*      Ver 1.20 2019-10-12 by T.KONDO
*
*****
Data File : ./test_sv.vdif
now analyzing # of threads .....
# of threads included is 1
thread ID : 1
# of frames in a second : 16000
Thread ID to pick up ==> 1
1st header information is as follows
===== VDIF HEADER INFORMATION =====
VDIF header (raw) : 0012F2DD 2700088F 230003EC 04010062
extended header (raw) : ABADDEED 00000000 00000000 00000000

Invalid flag = 0 : Legacy flag = 0
Sec from ref epoch = 1241821 : Ref epoch = 39 (2019/07/15 08:57:01)
Frame # = 2191 : VDIF Ver# = 1 : # Chs(log2) = 3
Frame length in 8 byte unit = 1004 (= 8032 bytes)
Data type = 0 : #bits/sample-1 = 1 : Thread ID = 1
Station ID (A2) = b (= 98 in number)
EDV : -85
Exteded Data W1 W2 W3 W4 : ADDEED 00000000 00000000 00000000
--- in case of NICT Extended Format ---
uflag = 0 : srate = 0 : Sync block = 00000000
DAS/station name (A8) :
=====
===== EXTENDED DATA
```

```

HH:MM:SS FRAME# I L VER CHS #Bytes C AD TID SID W1 W2
----- -----
08:57:01 2191 0 0 1 8 8032 0 2 1 b 00ADDEED 00000000
.....
08:57:09 1681 0 0 1 8 8032 0 2 1 b 00ADDEED 00000000
===== PROBABILITY(%) OF OCCURRENCES =====
LEVEL CH01 CH02 CH03 CH04 CH05 CH06 CH07 CH08
-----
0 9.3 11.2 25.9 28.0 28.4 28.6 28.4 28.9
1 40.7 38.8 24.1 22.0 21.6 21.4 21.6 21.1
2 40.7 38.8 24.1 22.0 21.6 21.4 21.6 21.1
3 9.3 11.2 25.9 28.0 28.4 28.6 28.4 28.9
===== SUMMARY =====
File Name : ./test_sv.vdif
Size : 1024000000 bytes
# of threads: 1
Start Time : 2019/07/15 08:57:01
Thread ID : 1 Frame# : 2191
Bytes/Frame : 8032 bytes
Data type : Real Data AD bits : 2 #Channels : 8
EDV# : -85
# of frames/sec : 16000
# of total frames : 127491 (#bad frames : 0)
Data period (sec)/thread : 7.968187
Data Rate/thread (Mbps) : 1024.000000
Sampling Frequency Estimated (MHz) for real : 64.000000
=====
```

\$

5.6 m5check

“m5check” checks the contents of Mark5 format data.

5.6.1 How to execute

`m5check m5file [mode]`

or

`m5check m5file [options]`

- where *m5file* – Mark-5 data file name to check
mode – set format to check 設定
 0 : with parity and 8|16|32|64 bits/word
 1 : without parity and 8|16|32|64 bits/word
 2 : display old style
 when *mode* is neglected, all modes are checked
- options* (any order)
- a[ll] – all data are checked (only for Mark5B format data)
 - old – execute with old style
 - f – omit checking sync block. if one of options below is set, this option is neglected
 - t[rack] *ntrack* – set # of tracks (8|16|32|64). Default is 32
 - vlba – set VLBA format (default is Mark-5 format)
 - p[arity] – set with parity mode (default is without parity)
 - nrzm – set NRZM mode (default is non-NRZM mode)
 - s[kip] *samples* – set # of samples to be skipped at first

5.6.2 Examples

An example of checking Mark5B format data.

```

kondo@io:~/chkdata/m5b$ m5check JPddcall.m5b
*****
*      Mark-5 data structure analysis          *
*      Ver 1.82  2012-11-26 by T.KONDO/NICT   *
*                                              *
*****
```

1st STEP: Checking Mark5B format
Data File : JPddcall.m5b
Now analizing the data file is Mark5B or not

OK this is Mark 5B Format data

FRAME#	SYNC	UUUUTFFF	MJDsssss.ssss	16	DATA#1	DATA#2	Mbps
00000	ABADDEED	F00F0000	22661050	0000A474	5CB997F7	538A10F3	N.A.
00001	ABADDEED	F00F0001	22661050	0000A474	5B5B6BB7	994A5166	N.A.
00002	ABADDEED	F00F0002	22661050	00012471	8975153B	055BC52A	N.A.
00003	ABADDEED	F00F0003	22661050	00012471	7DAD8195	1744AD2E	N.A.
00004	ABADDEED	F00F0004	22661050	0002247B	E0E5EE59	19526019	N.A.
00005	ABADDEED	F00F0005	22661050	0002247B	185A2A95	82166A5D	N.A.
00006	ABADDEED	F00F0006	22661050	0002247B	ADC29CD9	4941DA55	N.A.
00007	ABADDEED	F00F0007	22661050	0003A47E	0994A026	2BADDAA0	N.A.
00008	ABADDEED	F00F0008	22661050	0003A47E	45A66BF7	E94525D5	N.A.
00009	ABADDEED	F00F0009	22661050	0004246F	F40B9359	A7D41C19	N.A.

```

***** SUMMARY of DATA FORMAT ANALYSIS*****
File Name   : JPddcall.m5b
Data Format : Mark-5B
File Size   : 534277415 bytes
Total # of Frames (estimated from file size): 53342.393670
1st Header Information
  Time (MJD HH:MM:SS.SSSS) : 226 16:57:30.0000
  Frame # (in a second)    : 0
  User Specified (16 bits) : F00F
  TVG data flag           : 0
  Data Rate (Mbps)         : 2048.0
  Frames/sec               : 25600
  Data Length (sec)        : 2.083687
*****
```

\$

6 Data format conversion

6.1 k5tom5b

“k5tom5b” convert K5 format data to Mark5B format data

6.1.1 How to execute

k5tom5b *k5name1* [*k5name2* *k5name3* *k5name4* [*m5name*]] [*options*]

where *k5name1* – K5 file name for CH#01-04 or CH#01
k5name2 – K5 file name for CH#05-08 or CH#02
k5name3 – K5 file name for CH#09-12 or CH#03
k5name4 – K5 file name for CH#13-16 or CH#04
if K5 file names after the 2nd are not accompanied by directory name,
the directory of 1st K5 file is adopted for these files
m5name – Mark5 file name to be created
options (any order)
-o *m5name* – Mark5 file name to be created
-d *m5dir* – directory for Mark5 file out (default : mark5 directory)
-s *soffset* – set offset time from data head (sec) (default : 0)
-p *period* – data period to convert (sec) (default : all)
-e2bit *n* – 2bit data encode mode
 n=1 : offset binary 0 1 2 3
 n=2 : twisted offset binary 0 2 1 3
 n=3 : signed binary 1 0 2 3
 (default is 2)
-nocheck – no header error check (adopted for 2nd and later headers)
-ch1 *nn* – set K5 channel corresponding to Mark5 ch #1
 nn is K5 channel number (1-16)
-ch2 *nn* – set K5 channel corresponding to Mark5 ch #2
.....
-ch16 *nn* – set K5 channel corresponding to Mark5 ch #16
-chall *n1:n2:...:n16* – set K5 channels corresponding to Mark5 all channels
 n1 – K5 channel number (1-16) corresponding to Mark5 ch 1
 n2 – K5 channel number (1-16) corresponding to Mark5 ch 2
.....
 n16 – K5 channel number (1-16) corresponding to Mark5 ch 16

[Environmental variables]

k5tom5b env

M5DIR – default directory for Mark5 data
M5VEX – default directory for Mark5 vex file

6.1.2 Example

```
$ k5tom5b ./tds.k5a tds.k5b tds.k5c tds.k5d data.m5bA data.m5b
*****
*   K5/VSSP to Mark-5B Data Format Converter      *
*   k5tom5b (Ver 1.70  2016-08-15)  by T.KONDO/NICT  *
```

```
*****
Second Length : 30.000000
Second Length : 30.000000
Second Length : 30.000000
Second Length : 30.000000

K5 file(s)
FILE1 CH# 1- 4 : ./tds.k5a
(A/D(bits) 1 CHs 4 SFreq(kHz) 16000 Time 23:59:54 sec 86394) VSSP32
FILE2 CH# 5- 8 : ./tds.k5b
(A/D(bits) 1 CHs 4 SFreq(kHz) 16000 Time 23:59:54 sec 86394) VSSP32
FILE3 CH# 9-12 : ./tds.k5c
(A/D(bits) 1 CHs 4 SFreq(kHz) 16000 Time 23:59:54 sec 86394) VSSP32
FILE4 CH# 13-16 : ./tds.k5d
(A/D(bits) 1 CHs 4 SFreq(kHz) 16000 Time 23:59:54 sec 86394) VSSP32

Mark5B file (created) : data.m5b
Observation Date : 3digit MJD = 589
: Year = 2016
: Month = 7
: Day = 20
: Total Day = 202
Conversion length (sec) : 30

TIME LABEL MONITOR
=====
K5-FILE1 K5-FILE2 K5-FILE3 K5-FILE4 VLBA-TIME
HH:MM:SS HH:MM:SS HH:MM:SS HH:MM:SS JJSSSSSSssss
=====
23:59:54 23:59:54 23:59:54 23:59:54 589863940000 OK
23:59:55 23:59:55 23:59:55 23:59:55 589863950000 OK
23:59:56 23:59:56 23:59:56 23:59:56 589863960000 OK
23:59:57 23:59:57 23:59:57 23:59:57 589863970000 OK
23:59:58 23:59:58 23:59:58 23:59:58 589863980000 OK
23:59:59 23:59:59 23:59:59 23:59:59 589863990000 OK
00:00:00 00:00:00 00:00:00 00:00:00 59000000000000 OK
00:00:01 00:00:01 00:00:01 00:00:01 590000010000 OK
00:00:02 00:00:02 00:00:02 00:00:02 590000020000 OK
00:00:03 00:00:03 00:00:03 00:00:03 590000030000 OK
.....
00:00:19 00:00:19 00:00:19 00:00:19 590000190000 OK
00:00:20 00:00:20 00:00:20 00:00:20 590000200000 OK
00:00:21 00:00:21 00:00:21 00:00:21 590000210000 OK
00:00:22 00:00:22 00:00:22 00:00:22 590000220000 OK
00:00:23 00:00:23 00:00:23 00:00:23 590000230000 OK
=====

Mark5 file (data.m5b) has been created.

Time elapsed (sec) for One obs process is 52.000000
$
```

6.2 k5tom5

“k5tom5” convert K5 format data to Mark5 format data

6.2.1 How to execute

k5tom5 *jjj|yyyymmdd|yyyyddd* *k5name1 [k5name2 k5name3 k5name4 [m5name]] [options]*
or

k5tom5 -i *-infofile|make -v vexfile [options]*

.... for information file creation mode

where *jjj|yyyymmdd|yyyyddd*

– observation date in three ways as follows

jjj : lower 3digits of MJD

or

yyyymmdd : 4 digit year, 2 digit month, 2 digit day of month

or

$yyyyddd$: 4 digit year, 3 digit day of year
k5name1 – K5 file name for CH#01-04 or CH#01
k5name2 – K5 file name for CH#05-08 or CH#02
k5name3 – K5 file name for CH#09-12 or CH#03
k5name4 – K5 file name for CH#13-16 or CH#04
 if K5 file names after the 2nd are not accompanied by directory name,
 the directory of 1st K5 file is adopted for these files
m5name – Mark5 file name to be created
options (any order)
-i infofile – infomation file name that contains
 track vs channel table
 bit_psition vs channel table
 group# vs channel table
 (default “k5tom5info.txt”)
 “-i *info_file*” means that create infomation file named *info_file*
 “-i make” means that create default infomation file
-o m5name – Mark5 file name to be created
-d m5dir – directory for Mark5 file out (default : mark5 directory)
-s offset – set offset time from data head (sec) (default : 0)
-p period – data period to convert (sec) (default : all)
-vlba – set frame format to VLBA mode (default Mark4 mode)
-long – set 64 bit(track) mode (default 32bit mode)
-v vex_file – VEX file name to be read when “information file creation mode” is set
-sid stat_id – station ID when “information file creation mode” is set
-scan scan# – scan# for MODE get when “information file creation mode” is set
 (default : 1)
-short – set Mark5 file scan period to the shortest period of K5 files (default is the longest period. Dummy (all 0) data are filled.)
-monit – run condition monitor ON
-nocheck – no header error check (adopted for 2nd and later headers)

[Environmental variables]

k5tom5 env

M5DIR – default directory for Mark5 data
M5VEX – default directory for Mark5 vex file

6.2.2 Examples

Example 1: conversion using default information file

set date of observation by year and total day and use default information file “k5tom5info.txt”

```

k5tom5 20031015 02880001.k5a 02880001.k5b 02880001.k5c 02880001.k5d m5test.dat
*****
*      K5/VSSP to Mark-V Data Format Converter      *
*      k5tom5 (Ver 1.21 2005-09-17) by T.KONDO/NICT  *
*****
----- RUN CONDITION -----
yyyymmdd : 20031015
yyyyddd  : 2003288

```

```

jjj      : 927
MJD     : 52927
k5name 1 : 02880001.k5a
k5name 2 : 02880001.k5b
k5name 3 : 02880001.k5c
k5name 4 : 02880001.k5d
mk5name  : m5test.dat2
outdir   :
infofile : k5tom5info.txt
channel  : 0
group    : 0
soffset   : 0
period   : 0
odd     : 0
parity   : 0
nrzm    : -1
vlba    : 0
nbits   : 32
-----
```

```

K5 file(s)
FILE1 CH# 1- 4 : 02880001.k5a
(A/D(bits) 1 CHs 4 SFreq(kHz) 4000 Time 17:30:02 sec 63002)
FILE2 CH# 5- 8 : 02880001.k5b
(A/D(bits) 1 CHs 4 SFreq(kHz) 4000 Time 17:30:02 sec 63002)
FILE3 CH# 9-12 : 02880001.k5c
(A/D(bits) 1 CHs 4 SFreq(kHz) 4000 Time 17:30:02 sec 63002)
FILE4 CH# 13-16 : 02880001.k5d
(A/D(bits) 1 CHs 4 SFreq(kHz) 4000 Time 17:30:02 sec 63002)

Mark5 file (created) : m5test.dat2
Observation Date : 3digit MJD = 927
                     : Year = 2003
                     : Month = 10
                     : Day = 15
                     : Total Day = 288
```

TIME LABEL MONITOR

K5-FILE1 HH:MM:SS	K5-FILE2 HH:MM:SS	K5-FILE3 HH:MM:SS	K5-FILE4 HH:MM:SS	MarkIV-TIME YDDDHHMMSSss	
17:30:02	17:30:02	17:30:02	17:30:02	3288173002000	OK
17:30:03	17:30:03	17:30:03	17:30:03	3288173003000	OK
17:30:04	17:30:04	17:30:04	17:30:04	3288173004000	OK
17:30:05	17:30:05	17:30:05	17:30:05	3288173005000	OK
17:30:06	17:30:06	17:30:06	17:30:06	3288173006000	OK
17:30:07	17:30:07	17:30:07	17:30:07	3288173007000	OK
17:30:08	17:30:08	17:30:08	17:30:08	3288173008000	OK
17:30:09	17:30:09	17:30:09	17:30:09	3288173009000	OK
17:30:10	17:30:10	17:30:10	17:30:10	3288173010000	OK
17:30:11	17:30:11	17:30:11	17:30:11	3288173011000	OK

Mark5 file (m5test.dat2) has been created.

Time elapsed (sec) for One obs process is 44.000000

Example 2: Create an information file

create conversion information file using the VEX file “/home/vlbi/mark5/gg057c.vex”. Set station ID “Ks”.

```

k5tom5 -i /home/vlbi/mark5/k5tom5info.txt -v /home/vlbi/mark5/gg057c.vex -sid Ks
K5tom5 running under Information File create mode
info file (/home/vlbi/mark5/k5tom5info.txt) will be created (updated).
VEX file name --- /home/vlbi/mark5/gg057c.vex
SITES (Station ID) defined are
```

ID	SITE NAME
Pt	VLBA_PT
Kp	VLBA_KP
La	VLBA_LA
Br	VLBA_BR
Fd	VLBA_FD
Nl	VLBA_NL
Ov	VLBA_OV

Mk	VLBA_MK
Gb	GBT_VLBA
Ks	KASHIM34
At	ATCA
Sh	SHANGHAI
Mp	MOPRA
Cd	CEDUNA
Ho	HOBART
Ur	URUMQI
Pa	PARKES5

Selected Station ID = Ks
 search_site: No CLOCK info for KASHIM34 included in the VEX FILE.
 search_site: So all 0 for clock information was set.

Detailed site information

site definition	:	KASHIM34
site name	:	KASHIM34
site ID	:	Ks
site position	:	-3997649.222000 3276690.753000 3724278.823000
site clock		
validity epoch	:	0 0 0 0 0
clock epoch	:	0 0 0 0 0
clock offset	:	0.000000e+000
clock rate	:	0.000000e+000

Scan # for mode get is 1

mode is huygS

Mode was taken from Scan #1 as huygS

TRACK and FREQUENCY information for KASHIM34

BARREL ROLL	:	off
FREQDEF	=	2034.99MHz8x16MHz
		TRACKDEF = MKIV.8Ch2bit1to4
adbit=	2	sample_rate= 32000000.000000

bb	HS	Tr	AD	fo	chan	bbcid	BBC#	RF(Hz)	S	VBW(Hz)	PASS
1	1	2	sign	1	&CHO1	&BBC01	1	2034990000.0	L	16000000.0	
2	1	4	sign	2	&CHO1	&BBC01	1	2034990000.0	L	16000000.0	
3	1	6	sign	3	&CHO1	&BBC01	1	2034990000.0	L	16000000.0	
4	1	8	sign	4	&CHO1	&BBC01	1	2034990000.0	L	16000000.0	
5	1	10	mag	1	&CHO1	&BBC01	1	2034990000.0	L	16000000.0	
6	1	12	mag	2	&CHO1	&BBC01	1	2034990000.0	L	16000000.0	
7	1	14	mag	3	&CHO1	&BBC01	1	2034990000.0	L	16000000.0	
8	1	16	mag	4	&CHO1	&BBC01	1	2034990000.0	L	16000000.0	
9	1	18	sign	1	&CHO2	&BBC02	2	2034990000.0	L	16000000.0	
10	1	20	sign	2	&CHO2	&BBC02	2	2034990000.0	L	16000000.0	
11	1	22	sign	3	&CHO2	&BBC02	2	2034990000.0	L	16000000.0	
12	1	24	sign	4	&CHO2	&BBC02	2	2034990000.0	L	16000000.0	
13	1	26	mag	1	&CHO2	&BBC02	2	2034990000.0	L	16000000.0	
14	1	28	mag	2	&CHO2	&BBC02	2	2034990000.0	L	16000000.0	
15	1	30	mag	3	&CHO2	&BBC02	2	2034990000.0	L	16000000.0	
16	1	32	mag	4	&CHO2	&BBC02	2	2034990000.0	L	16000000.0	
17	1	3	sign	1	&CHO3	&BBC01	1	2034990000.0	U	16000000.0	
18	1	5	sign	2	&CHO3	&BBC01	1	2034990000.0	U	16000000.0	
19	1	7	sign	3	&CHO3	&BBC01	1	2034990000.0	U	16000000.0	
20	1	9	sign	4	&CHO3	&BBC01	1	2034990000.0	U	16000000.0	
21	1	11	mag	1	&CHO3	&BBC01	1	2034990000.0	U	16000000.0	
22	1	13	mag	2	&CHO3	&BBC01	1	2034990000.0	U	16000000.0	
23	1	15	mag	3	&CHO3	&BBC01	1	2034990000.0	U	16000000.0	
24	1	17	mag	4	&CHO3	&BBC01	1	2034990000.0	U	16000000.0	
25	1	19	sign	1	&CHO4	&BBC02	2	2034990000.0	U	16000000.0	
26	1	21	sign	2	&CHO4	&BBC02	2	2034990000.0	U	16000000.0	
27	1	23	sign	3	&CHO4	&BBC02	2	2034990000.0	U	16000000.0	
28	1	25	sign	4	&CHO4	&BBC02	2	2034990000.0	U	16000000.0	
29	1	27	mag	1	&CHO4	&BBC02	2	2034990000.0	U	16000000.0	
30	1	29	mag	2	&CHO4	&BBC02	2	2034990000.0	U	16000000.0	
31	1	31	mag	3	&CHO4	&BBC02	2	2034990000.0	U	16000000.0	
32	1	33	mag	4	&CHO4	&BBC02	2	2034990000.0	U	16000000.0	
33	2	2	sign	1	&CHO5	&BBC03	3	2139990000.0	L	16000000.0	
34	2	4	sign	2	&CHO5	&BBC03	3	2139990000.0	L	16000000.0	
35	2	6	sign	3	&CHO5	&BBC03	3	2139990000.0	L	16000000.0	
36	2	8	sign	4	&CHO5	&BBC03	3	2139990000.0	L	16000000.0	
37	2	10	mag	1	&CHO5	&BBC03	3	2139990000.0	L	16000000.0	
38	2	12	mag	2	&CHO5	&BBC03	3	2139990000.0	L	16000000.0	
39	2	14	mag	3	&CHO5	&BBC03	3	2139990000.0	L	16000000.0	
40	2	16	mag	4	&CHO5	&BBC03	3	2139990000.0	L	16000000.0	
41	2	18	sign	1	&CHO6	&BBC03	3	2139990000.0	U	16000000.0	
42	2	20	sign	2	&CHO6	&BBC03	3	2139990000.0	U	16000000.0	
43	2	22	sign	3	&CHO6	&BBC03	3	2139990000.0	U	16000000.0	
44	2	24	sign	4	&CHO6	&BBC03	3	2139990000.0	U	16000000.0	
45	2	26	mag	1	&CHO6	&BBC03	3	2139990000.0	U	16000000.0	
46	2	28	mag	2	&CHO6	&BBC03	3	2139990000.0	U	16000000.0	

```

47 2 30 mag 3 &CH06 &BBC03 3 2139990000.0 U 16000000.0
48 2 32 mag 4 &CH06 &BBC03 3 2139990000.0 U 16000000.0
49 2 3 sign 1 &CH07 &BBC04 4 2286990000.0 L 16000000.0
50 2 5 sign 2 &CH07 &BBC04 4 2286990000.0 L 16000000.0
51 2 7 sign 3 &CH07 &BBC04 4 2286990000.0 L 16000000.0
52 2 9 sign 4 &CH07 &BBC04 4 2286990000.0 L 16000000.0
53 2 11 mag 1 &CH07 &BBC04 4 2286990000.0 L 16000000.0
54 2 13 mag 2 &CH07 &BBC04 4 2286990000.0 L 16000000.0
55 2 15 mag 3 &CH07 &BBC04 4 2286990000.0 L 16000000.0
56 2 17 mag 4 &CH07 &BBC04 4 2286990000.0 L 16000000.0
57 2 19 sign 1 &CH08 &BBC04 4 2286990000.0 U 16000000.0
58 2 21 sign 2 &CH08 &BBC04 4 2286990000.0 U 16000000.0
59 2 23 sign 3 &CH08 &BBC04 4 2286990000.0 U 16000000.0
60 2 25 sign 4 &CH08 &BBC04 4 2286990000.0 U 16000000.0
61 2 27 mag 1 &CH08 &BBC04 4 2286990000.0 U 16000000.0
62 2 29 mag 2 &CH08 &BBC04 4 2286990000.0 U 16000000.0
63 2 31 mag 3 &CH08 &BBC04 4 2286990000.0 U 16000000.0
64 2 33 mag 4 &CH08 &BBC04 4 2286990000.0 U 16000000.0
default Mark-V data format is as follows
data encode -- NRZL without parity
data format -- Mark-IV
#_of_track = 64

```

Information file (/home/vlbi/mark5/k5tom5info.txt) created!!

6.3 k5tovdif

“k5tovdif” converts K5 format data to VDIF format data

6.3.1 How to execute

k5tovdif *k5name1* [*k5name2* *k5name3* *k5name4*] [*vdifname*] [*options*]

- where *k5name1* – K5 file name for CH#01-04 or CH#01
- k5name2* – K5 file name for CH#05-08 or CH#02
- k5name3* – K5 file name for CH#09-12 or CH#03
- k5name4* – K5 file name for CH#13-16 or CH#04
 if K5 file names after the 2nd are not accompanied by directory name,
 the directory of 1st K5 file is adopted for these files
- vdifname* – VDIF file name to be created
- options* (any order)
 - o *vdifname* – VDIF file name to be created (default : extension of 1st K5 name is replaced by ‘.vdif’)
 - dir *vdifdir* – directory for VDIF file out (default : K5 directory)
 - so *soffset* – set offset time from data head (sec) (default : 0)
 - p *period* – data period to convert (sec) (default : all)
 - das *das_name* – set station name or compulsoly set station name (in case of VSSP32 station or PC name got from it’s AUX data)
 - sid *sid* – set station id (A2) (in case of VSSP32 sid got from it’s AUX data)
 - date *jjj|yyyymmdd|yyyyddd*
 - set date in case of VSSP (not VSSP32) format as follows
 - jjj* : lower 3digits of MJD
 - or
 - yyyymmdd* : 4 digit year, 2 digit month, 2 digit day of month
 - or
 - yyyyddd* : 4 digit year, 3 digit day of year
- e2bit *n* – 2bit data encode mode
 - n=1 : offset binary 0 1 2 3
 - n=2 : twisted offset binary 0 2 1 3
 - n=3 : signed binary 1 0 2 3
(default is 2)
- nocheck – no header error check (adopted for 2nd and later headers)
- fr[amelength] *frame_bytes*

- – set frame length without header (in byte) (default 1280)
- num[frame_sec] *nframe*
 - – set # of frames per second (default: $2048 \times 10^6 / (1280) = 200000$)
- ch1 *nn*
 - – set K5 channel corresponding to VDIF ch #1
nn is K5 channel number (1-16)
- ch2 *nn*
 - – set K5 channel corresponding to VDIF ch #2
-
- ch16 *nn*
 - – set K5 channel corresponding to VDIF ch #16
- chall *n1:n2: ... :n16*
 - – set K5 channels corresponding to VDIF all channels
 - n1* – K5 channel number (1-16) corresponding to VDIF ch 1
 - n2* – K5 channel number (1-16) corresponding to VDIF ch 2
-
- n16* – K5 channel number (1-16) corresponding to VDIF ch 16

[Environmental variables]

k5tovdif env

VDIFDIR – default directory for VDIF data

6.4 ads2k5

“ads2k5” converts ADS3000+(DBBC mode) format to K5 format data

6.4.1 How to execute

ads2k5 *adsname*[*options*]

where *adsname* – ADS3000-DBBC mode data file name
options (any order)

- c *channel*
 - – pickup channel (1-16) for 1ch conversion mode (same as ‘-1ch option’. default 4x4ch mode)
- u *unit*
 - – pickup unit (1-4) for 4 ch conversion mode (-c option is stronger than this option) (default 4x4ch mode)
- o *k5name*
 - – K5 file name to be created (default : see below)
- d *k5dir*
 - – directory for k5 file out
- fsampf *fmhz*
 - – channel sampling frequency (MHz) (deflt=32)
- adbit *adbit*
 - – # of AD conversion bit (deflt=1)
- 1ch *ch*
 - – set K5 data to 1ch mode and set pick up ADS3000-DBBC ch (starting at 1)
- 4ch *ch1 ch2 ch3 ch4*
 - – set K5 data to 4 ch mode and set pick up channels from ADS3000-DBBC (default: convert to 4x4ch K5 files)
- 2bit *mode*
 - – select 2bit AD decode table
 - 1: offset binary 0,1,2,3 (no conversion: default)
 - 2: Mark V standard 0,2,1,3
 - 3: signed integer 1,0,2,3
- t *YYYY/DDDHMMSS|YYYY/DDD-HH:MM:SS or HHMMSS|HH:MM:SS or YYYYDDD|YYYY/DDD*
 - – set start date and time of data. If this is omitted, start time is taken from ADS filename.
- s *soffset*
 - – set offset time from data head (sec) (default : 0)

-p <i>period</i>	- data period to convert (sec) (default : all)
-vssp	- force K5 format to VSSP (default is VSSP32)
-monit	- monitor run parameters
-adsbit <i>adsbit</i>	- ADS AD bits (2 4 8) (deflt=2). if <i>adbit</i> >=4, <i>adsbit</i> = <i>adbit</i>
-adsnumch <i>adsnumch</i>	- ADS # of channels (1 8) (deflt=8)

[Naming rule for K5 file created]

(ADS : ADS3000 file name or name given by ‘-o’ option)

```
4x4ch mode
ADS.k5a ---- for group#1 (ch01-04)
ADS.k5b ---- for group#2 (ch05-08)
ADS.k5c ---- for group#3 (ch09-12)
ADS.k5d ---- for group#4 (ch13-16)
4ch mode
ADS.k5[a|b|c|d]
1ch mode
ADS.k5-NN ---- where NN is channel number 01-16
```

[Environmental variables]

ads2k5 env

K5_CH_TABLE	- operator defined CH allocation table
ADSDIR	- default directory for ADS data
K5DIR	- default directory for K5 file out

Note:

If ADS3000 file name satisfies following condition, start time and sampling frequency are properly estimated from the file name.

- File name has a following structure.
 xxx...xxxx_YYYYDDDHHMMSS.raw
 where xxx...xxxx — any characters YYYYDDDHHMMSS – start time (year,day of year, hour, minute, second)
- “xxx...xxxx” includes a sampling information block like “16MHz” or “8Msps” (don’t care about upper-case or lower-case of characters for MHz or Msps).
- This information block should be precede by a non-number ASCII character or start of the file name, e.g.,dbbc_16MHz..... or ...xyz.32MSPS.xxxxxx

6.5 m5btok5

“m5btok5” converts Mark5B format data to K5 format data

6.5.1 How to execute

m5btok5 *m5bname [options]*

where *m5bname* – Mark5B data file name
options (any order)

- o *k5name* – K5 file name to be created (default : see below)
- d *k5dir* – directory for k5 file out (dfault Mark5 directory)
- bs *nbitsream* – set Mark5B # of bit-stream (1,2,4,8,16,32)
- fsampl *fMHz* – channel sampling frequency (MHz) (deflt=4)
- adbit *adbit* – # of AD conversion bit (deflt=1)
- 1ch *ch* – set K5 data to 1ch mode and set pick up Mark5B ch (starting at 1)
- 4ch *ch1 ch2 ch3 ch4* – set K5 data to 4 ch mode and set pick up channels from Mark5B data
- 2bit *mode* – select 2bit AD decode table
 - 1: offset binary 0,1,2,3 (no conversion)
 - 2: Mark V standard 0,2,1,3 (dfault)
 - 3: signed integer 1,0,2,3

[Naming rule for K5 file created]

(MK5 : original mark5 name)

```
4ch mode
MK5.k5a ---- for group#1 (ch01-04)
MK5.k5b ---- for group#2 (ch05-08)
MK5.k5c ---- for group#3 (ch09-12)
MK5.k5d ---- for group#4 (ch13-16)

1ch mode
MK5.k5-NN ---- where NN is channel number 01-16
```

[Environmental variables]

m5btok5 env

M5DIR	–	default directory for Mark5 data
K5DIR	–	default directory for K5 file out

6.6 m5tok5

“m5tok5” converts Mark5B format data to K5 format data

6.6.1 How to execute

Mode 1

m5tok5 m5name [options]

where *m5name* – Mark5 data file name
options (any order)

- c *channel* – pickup channel (1-16) for 1ch conversion mode (default all group and 4ch mode)
- g *group* – pickup group (1-4) for 4 ch conversion mode (omitted when ‘-c’ option is set) (default all group)

- i *infofile*
 - infomation file name that contains
 - track vs channel table
 - bit_psition vs channel table
 - group# vs channel table
 - (default “m5tok5info.txt”)
 - “-i -*info_file*” means that create infomation file named *infofile*
 - “-i make” means that create default infomation file
- o *k5name*
- d *k5dir*
- s *soffset*
- p *period*
- r
- v *vex_file*
- sid *stat_id*
- scan *scan#*
- subp *subpass*
- odd
- monit
- K5 file name to be created (default : see below)
- directory for k5 file out (dfault Mrak5 directory)
- set offset time from data head (sec) (default : 0)
- data period to convert (sec) (default : all)
- reverse track order when fanout=2 or more
- VEX file name to be read when “information file creation mode” is set
- station ID when “information file creation mode” is set
- scan# for MODE get when “information file creation mode” is set (default : 1)
- set subpass at information file creation mode (default is “A”)
- 32bit (4byte) shift in reading Mark5 data (this works only for 64 track mode)
- run condition monitor ON

Mode 2

m5tok5 *m5name k5file bit1 [bit2 bit3 .. bitN] [options2]*

- where *m5name* - Mark5 data file name
- k5file* - K-5 file name to be created
- bit1* - 1st pick up bit position (0- max track#)
- bit2* - 2nd pick up bit position (0- max track#)
-
- bitN* - Nth pick up bit position (0- max track#)
- note: *N* should be (K5 channels)*(AD bits)*(Mark5 Fanout)
- options2* (any order)
 - track *ntrack* - # of Mark5 track (8,16,32,64) (deflt=32)
 - fsampl *fkhz* - channel sampling frequency (MHz) (deflt=4)
 - adbit *adbit* - # of AD conversion bit (deflt=1)
 - nch *numch* - # of channels in K5 format (1 or 4) (deflt=4)
 - parity - with parity data
 - noparity - non-parity data (default)
 - vlba - set VLBA mode (default mark IV mode)
 - s *soffset* - set offset time from data head (sec) (default : 0)
 - p *period* - data period to convert (sec) (default : all)
 - odd - 32bit (4byte) shift in reading Mark5 data (this works only for 64 track mode)

[Naming rule for K5 file created]

(MK5 : original mark5 name)

```
4ch mode
MK5.k5a ---- for group#1 (ch01-04)
```

```

MK5.k5b ---- for group#2 (ch05-08)
MK5.k5c ---- for group#3 (ch09-12)
MK5.k5d ---- for group#4 (ch13-16)
1ch mode
MK5.k5-NN ---- where NN is channel number 01-16

```

[Environmental variables]

m5tok5 env

M5DIR	-	default directory for Mark5 data
M5VEX	-	default directory for VEX file

6.7 vdif2k5

“vdif2k5” converts VDIF format data to K5 format data

6.7.1 How to execute

`vdif2k5 vdiffile [options]`

where *vdiffile* – VDIF data file name
options (any order)

- o *k5name* – K5 file name to be created (default : see below)
- d *k5dir* – directory for k5 file out (default VDIF directory). If *k5name* set by '-o' option includes directory, this option is ignored.
- fsampl *fMHz* – channel sampling frequency (MHz) (deflt=4)
- adbit *adbit* – # of AD conversion bit (deflt=1)
- 1ch *ch* – set K5 data to 1ch mode and set pick up VDIF ch (starting at 1)
- 4ch *ch1 ch2 ch3 ch4* – set K5 data to 4 ch mode and set pick up channels from VDIF data
- 2bit *mode* – select 2bit AD decode table
 - 1: offset binary 0,1,2,3 (no conversion) (dfault)
 - 2: Mark V standard 0,2,1,3
 - 3: signed integer 1,0,2,3
- s *soffset* – set offset time from data head (sec) (default : 0)
 in case of negative value: absolute value means skip over bytes

[Naming rule for K5 file created]

1) '-o' option is used

```

4ch mode
VDIF.k5a ---- for group#1 (ch01-04)
VDIF.k5b ---- for group#2 (ch05-08)
VDIF.k5c ---- for group#3 (ch09-12)
VDIF.k5d ---- for group#4 (ch13-16)
1ch mode (from multi channel VDIF)
MK5.k5-NN ---- where NN is channel number 01-16
1ch mode (from 1ch VDIF)
VDIF.k5
(VDIF : original VDIF name)

```

2) '-o' option is used

```
case that # of K5 file is one
  k5name --- given by '-o' option
case that # of K5 files is 2
  k5name.1 k5name.2
case that # of K5 files is 4
  k5name.1 k5name.2 k5name.3 k5name.4
```

6.8 vdif2m5b

“vdif2m5b” converts VDIF format data to Mark5B format data

6.8.1 How to execute

vdif2m5b *vdiffile* [*options*]

where *vdiffile* – VDIF data file name
options (any order)

-o <i>m5bname</i>	– Mark5B file name to be created (default : see below)
-d <i>m5dir</i>	– directory for Mark5B file out (default VDIF directory)
-fsampl <i>fMHz</i>	– channel sampling frequency (MHz) (deflt=4)
-2bit mode	– select 2bit AD decode table
	1: offset binary 0,1,2,3 (no conversion)
	2: Mark V standard 0,2,1,3 (default)
	3: signed integer 1,0,2,3
-s <i>sOffset</i>	– set offset time from data head (sec) (default : 0)
-p <i>period</i>	– data period to convert (sec) (default : all)
-type1	– outfile naming Type 1 (replace file extention to “m5b”)
-pid <i>thread_id</i>	– set pickup thread ID compulsory
-ch1 <i>nn</i>	– set VDIF channel corresponding to Mark5B ch #1
	<i>nn</i> is VDIF channel number (1-16)
-ch2 <i>nn</i>	– set VDIF channel corresponding to Mark5B ch #2
.....	
-ch16 <i>nn</i>	– set VDIF channel corresponding to Mark5B ch #16
-chall <i>n1:n2:...:n16</i>	– set VDIF channels corresponding to Mark5B all channels
	<i>n1</i> – VDIF channel number (1-16) corresponding to Mark5B ch 1
	<i>n2</i> – VDIF channel number (1-16) corresponding to Mark5B ch 2
.....	
	<i>n16</i> – VDIF channel number (1-16) corresponding to Mark5B ch 16

[Naming rule for Mark5B file created]

(VDIF.vdif : original VDIF name)

Type 0 VDIF.vdif.m5b (default)
Type 1 VDIF.m5b

7 Actual correlation processing

Correlation processing is devided into two steps as follows.

1. Fringe search: determine clock parameters (offset and rate) by baseline.
2. Processing all scans: process all scan data using clock parameters determined by fringe search.

7.1 Fringe search

Correlation processing for geodetic VLBI data is usually carried out with a small number of lags such as 32 to increase the throughput of processing. To keep a correlation peak at the center of the lag window, clock offset should be determined with an accuracy of better than a few tenths percentage of a sampling period. Fringe search is a correlation processing to find out fringes and to determine a clock offset between two stations.

A-priori delay neccesary for correlation processing is calculated from time of ovservation, station positions, source position, earth orientation parameters, and clock error. It is difficult to obtain an accurate clock error between two stations in advance, so that a clock error measured by GPS at each station is usually used as a temporal value to calculate a-priori delay. If there is no GPS clock measurement, zero is used as a temporal vaule. In case of geodetic VLBI lasting for 24 hours or more, clock rate is slso determined. The concrete method of fringe search and clock parameters determination is out as follows.

1. Determination of the scan for fringe search

- without clock rate determination: a scan observed a strong source around the middle of the session
- with clock rate determination: two scans that observed a strong source around the beginning and end of the session

Source information is found in a schedule file. It is also obtained by executing “apri_calc” with a schedule monitoring mode as follows.

```
apri_calc -/home/vlbi/sked/sample.skd
```

or

```
apri_calc /home/vlbi/sked/sample.skd -monit
```

where “/home/vlbi/sked/sample.skd” is a schedule file

then observation information is displayed as follows.

```
apri_calc (Ver. 2016-10-12)

=====
      RUN CONDITION
=====
K5 file naming type is Type 1 : sidDDDDNNNN.dat (SKED deflt)
=====
SkdMonit: ***** Schedule file monitor *****
SkdMonit: Schedule file = ipvlbi/sked/sample.skd
SkdMonit: Expcode      = K$07235
SkdMonit: Total Scan # = 593
SkdMonit: Total Star # = 16
SkdMonit:
SkdMonit: 1st Scan    = 2007/08/23 01:15:00 3C84
SkdMonit: Last Scan   = 2007/08/24 00:46:20 3C273B
SkdMonit:
SkdMonit: ----- Station ID Table -----
SkdMonit: G --- KOGANEI
SkdMonit: R --- KASHIM11
SkdMonit: Y --- TATEYAMA
SkdMonit:
SkdMonit: ----- Star Table -----
SkdMonit:          NAME1      NAME2    R.A.(deg)    DEC(deg)    EPOCH
SkdMonit: 1 0059+581      $ 15.690677  58.403093 2000.000000
SkdMonit: 2 0316+413      3C84    49.950667  41.511695 2000.000000
SkdMonit: 3 0420-014      $ 65.815836  -1.342518 2000.000000
SkdMonit: 4 0552+398      $ 88.878357  39.813657 2000.000000
SkdMonit: 5 0727-115      $ 112.579635 -11.686833 2000.000000
SkdMonit: 6 0923+392      4C39.25  141.762558  39.039126 2000.000000
SkdMonit: 7 1226+023      3C273B  187.277915  2.052389 2000.000000
```

```

SkdMonit: 8 1253-055      3C279 194.046527 -5.789312 2000.000000
SkdMonit: 9 1308+326      $ 197.619433 32.345495 2000.000000
SkdMonit: 10 1334-127     $ 204.415762 -12.956859 2000.000000
SkdMonit: 11 1641+399      3C345 250.745042 39.810276 2000.000000
SkdMonit: 12 1730-130      NRA0530 263.261274 -13.080430 2000.000000
SkdMonit: 13 1921-293      $ 291.212733 -29.241700 2000.000000
SkdMonit: 14 2134+004      2134+00 324.160776 0.698393 2000.000000
SkdMonit: 15 2145+067      $ 327.022744 6.960723 2000.000000
SkdMonit: 16 2251+158      3C454.3 343.490616 16.148211 2000.000000
SkdMonit:
SkdMonit: ----- Frequency (MHz) Table -----
SkdMonit: Gr# 1    7714.99 U   7724.99 U   7754.99 U   7814.99 U
SkdMonit: Gr# 2    8034.99 U   8234.99 U   8414.99 U   8524.99 U
SkdMonit: Gr# 3    8564.99 U   8584.99 U   2154.99 U   2164.99 U
SkdMonit: Gr# 4    2234.99 U   2294.99 U   2384.99 U   2414.99 U
SkdMonit:
SkdMonit: ----- PCAL Freq (kHz) Table -----
SkdMonit: Gr# 1    10.0       10.0       10.0       10.0
SkdMonit: Gr# 2    10.0       10.0       10.0       10.0
SkdMonit: Gr# 3    10.0       10.0       10.0       10.0
SkdMonit: Gr# 4    10.0       10.0       10.0       10.0
SkdMonit:

```

Then select a strong source such as “3C273B”, and execute “apri_calc” with a schedule monitoring mode with the option “-source” as follows.

```
apri_calc -/home/vlbi/sked/sample.skd -source 3C273B
```

or

```
apri_calc /home/vlbi/sked/sample.skd -monit -source 3C273B
```

A certain baseline can be specified if necessary by using the “-baseid” option as follows.

```
apri_calc /home/vlbi/sked/sample.skd -monit -source 3C273B -baseid RY
```

where “RY” is a combination of Station IDs. Then scan information is displayed as follows.

Column named "SCAN#" shows the scan number.

2. Calculation of a-priori values

Execute “apri_calc” for a scan selected by the previous step as follows.

```
apri calc /home/vlbi/sked/sample.skd -start 10 -stop 10 -apedit /home/vlbi/corrapri
```

where “-apeder” option sets the directory of a-priori files created. If you want to execute for all scans selected, execute as follows.

```
apri calc /home/vlbi/sked/sample.skd -source 3C273B -baseid BY -apedir /home/vlbi/corrapri
```

See “How to run apri_calc” (section 3.1) for details. Since a-priori file is a text file, you can edit it easily if necessary (see Appendix A for the format of a-priori file).

3. Correlation Processing

Execute “fx_cor” (or “fx_cor_new” for not K5/VSSP format data) with a large number of lags such as 1024 or more as follows.

```
fx_cor /home/vlbi/corrapri/apesample.txt -lag 1024
```

where “apesample.txt” is a a-priori file created by “apri_calc” (use actual a-priori file name created by the previous step). After processing, correlation amplitude and residual delay are displayed by channel as follows.

CH#	FREQ(MHz)	MAX AMP	RESIDUAL DELAY (sec)
1	8209.99	0.000651	-3.26108e-06
2	8219.99	0.000443	-3.28622e-06
3	8249.99	0.000589	-3.23678e-06
4	8309.99	0.000480	-3.25464e-06

COUT File is ./cout/cout0005.txt

where ”COUT File” is a correlation results file. Correlation functions are also plotted as shown in Fig.7.1.

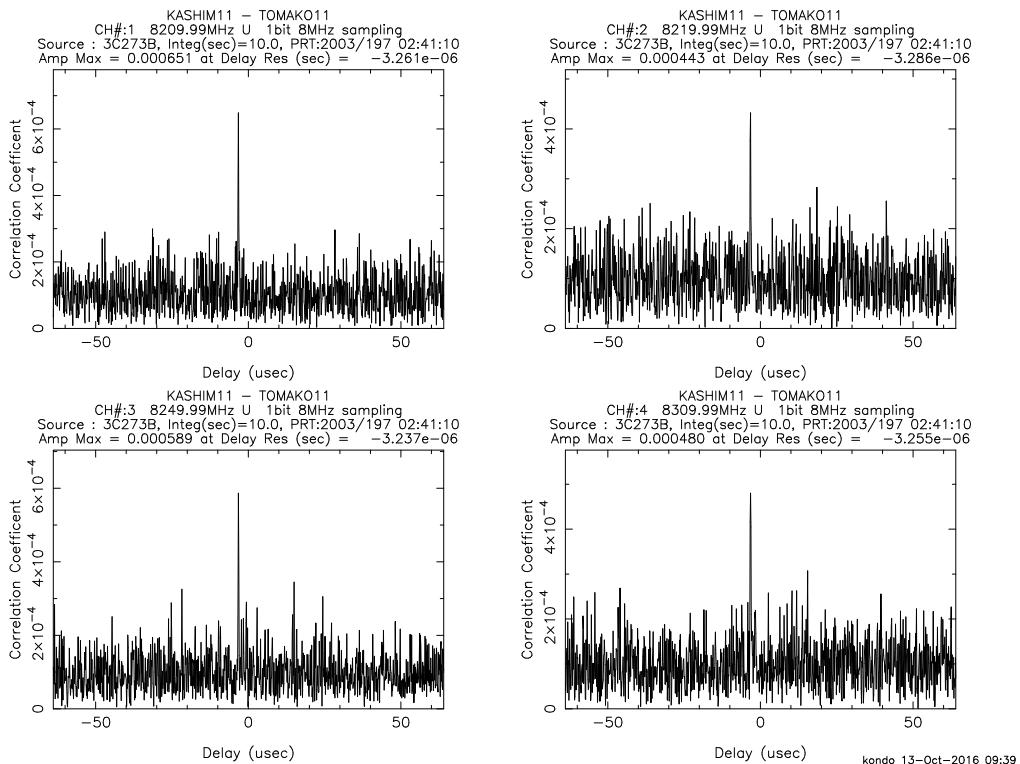


Figure 7.1. Correlation functions displayed after “fx_cor” (or “cor”) processing.

If clear peak appears in the plots of correlation function, we can determine clock offset. If it is not clear, execute the coarse-search program “sdelay” to search a clear peak as follows.

```
sdelay ./cout/cout0005.txt
```

where “./cout/cout0005.txt” is a COUT File (correlator out file) displayed at the end of “fx_cor” processing. After “sdelay” processing, summary of coarse search is displayed as follows and search functions are plotted (Fig.7.2).

```
*****
SDELAY (Ver. 2016-08-12) SUMMARY OUT PUT *****
COUT   : ./cout/cout0005.txt
X DATA  : /home/kondo/data/testspeed/Xk5data.10.dat
Y DATA  : /home/kondo/data/testspeed/Yk5data.10.dat
BASELINE : KASHIM11 - TOMAKO11
SOURCE  : 3C273B           SAMPLING : 1 bit   8 MHz
PRT    : 2003/197 02:41:10   Tinteg(s) : 9.0
LAG SIZE: 1024
CLOCK   : offset 5.735e-06(s) rate 0.000e+00(s/s)
EOP     : ut1-utc 0.000000(s)
        : x-wobb 0.000000(asec)
        : y-wobb 0.000000(asec)

=====
CH#  FREQUENCY      AMP MAX      POSITION      RESIDUAL
(MHz)          (2048x 128)   Delay(usec)  Rate(ps/s)  SNR
-----
1   8209.99 U  1.192e-03  ( 973,  65)  -3.251  -0.134  10.1
2   8219.99 U  8.613e-04  ( 973,  68)  -3.270  2.482   7.3
3   8249.99 U  1.089e-03  ( 973,  65)  -3.239  -0.089   9.2
4   8309.99 U  1.095e-03  ( 973,  66)  -3.242  0.943   9.3

Note: No amplitude correction is made.
=====
```

```
=====
PCAL SUMMARY
CH#  PCAL FREQ(kHz)  X-Amp  X-Phase  Y-Amp  Y-Phase
1    10.00       0.109    70.6    0.251   111.9
2    10.00       0.107   -92.2    0.244  -162.7
3    10.00       0.106   136.2    0.247   84.3
4    10.00       0.104  -143.5    0.259  -43.2
=====
```

Outfile is ./sdelayout.txt

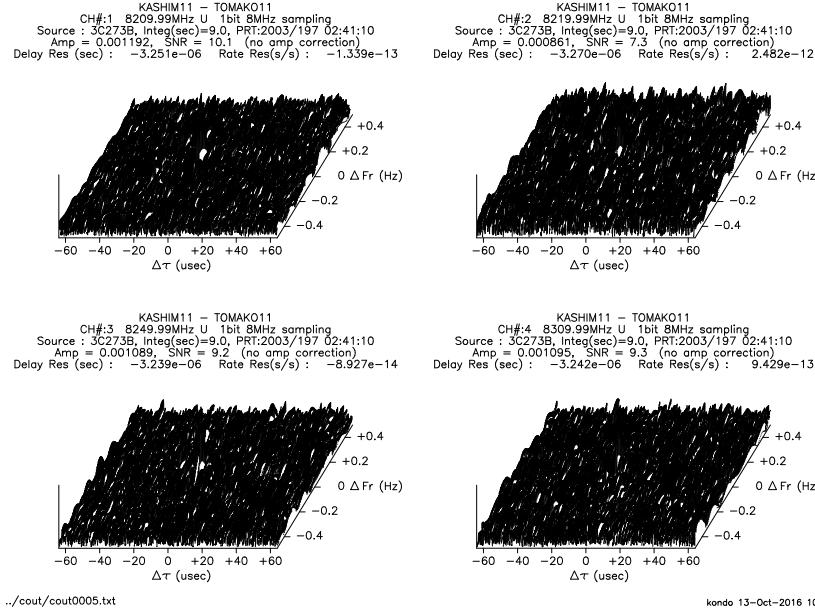


Figure 7.2. Search functions displayed after “sdelay” processing. Peaks are not clear due to a large number of lags. In this case, zoom up using the options “-tzoom” and “-tshift”. Fig.7.3 shows search functions with the options “-tzoom 20 -tshift -3.25e-6”.

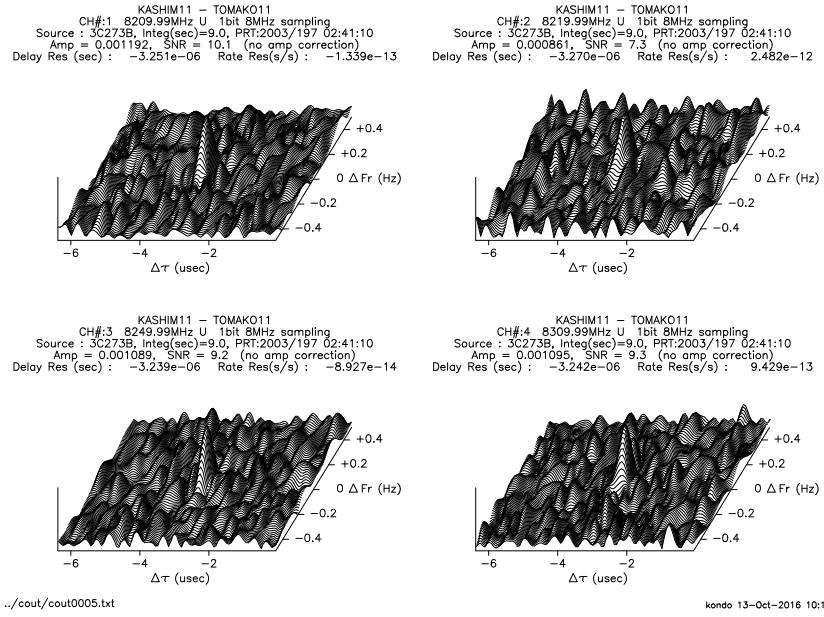


Figure 7.3. Same as Fig. 7.2 but with the options “-tzoom 20 -tshift -3.25e-6”.

Fringe detection is judged from summary output and plot of search functions as follows.

- peak positions shown at “POSITION” column are the same for all channels
- clear single peak appears in the plot of serach function
- SNR is larger than 7

If above conditions are almost satisfied, we can say “fringe is successfully detected”.

4. Determination of clock offset

Clock offset c_{offset} is given as

$$c_{offset} = c_o + \Delta\tau$$

where c_o is clock offset used at “apri_calc” and $\Delta\tau$ is residual delay obtained by “sdelay”.

5. Determination of clock rate

Clock rate c_{rate} is given as

$$c_{rate} = \frac{c_2 - c_1}{t_2 - t_1}$$

where c_1 is clock offset obtained for a scan at the time t_1 and c_2 is clock offset obtained for a scan at the time t_2 , and t_1 and t_2 are PRT (processing reference time) given by a unit of second. If a session extends on the next day, take the day difference into consideration.

6. Set up clock parameters at “apri_calc”

Clock offset, clock rate, and clock epoch are set up when executing “apri_calc” as follows.

- in case of setting up clock offset only:
set clock offset only, use default or set 0 for rate and epoch.
- in case of setting up both clock offset and rate:
set c_1 for clock offset, c_{rate} for clock rate, and t_1 (after converting to year, total day, hour, minute, second) for clock epoch

7.2 Processing all scans

1. Calculation of a-priori values

Calculate a-priori values for all scans with reflecting clock parameters obtained by fringe search. An example of non-interactive execution is as follows.

```
apri_calc /home/vlbi/sked/jd1606.skd -coffset -3.25e-6 -crate 1.0e-13  
-ceepoch 2016/197-02:41:10 -baseid RY -g 2 -xdir /home/vlbi/data/R  
-ydir /home/vlbi/Y -apedir /home/vlbi/corrapri
```

Conditions used in this example are as follows; clock offset is $-3.25 \mu\text{sec}$, clock rate is $1.0 \times 10^{-13} (\text{s/s})$, clock epoch is 2016/197 02:41:10, baseline is “RY”, data directory for X station data is “/home/vlbi/data/R” and for Y station “/home/vlbi/data/Y”, directory for a-priori files is “/home/vlbi/corrapri”. In case of using clock offset only, omit options “-crate” and “-ceepoch”.

2. Generation of the list of a-priori files

Execute linux command as follows.

```
ls -1 /home/vlbi/corappri/ape*RYb.txt > apelistRY.txt
```

where the directory of a-priori files is “/home/vlbi/corrapri” and “apelistRY.txt” is a file generated. “ape*RYb.txt” is a filter to select baseline “RY” and frequency code “b” if there are a-priori files for multiple baselines. If you want to select all a-priori files, execute like,

```
ls -1 /home/vlbi/corappri/ape*.txt > apelistRY.txt
```

where “apelistRY.txt” can be any another name.

3. Correlation processing for all scans

As for 1-bit sampling data, execute as follows,

```
cor_all ./apelistRY.txt
```

where “apelistRY.txt” is the name of list file located in the current directory. See “How to run software correlator” (section 4.2) for other options. As for multi-bit sampling data, such as 2-bit AD data, use “fx_cor_all” instead. Use “cor_all_new” or “fx_cor_all_new” for format data other than K5/VSSP format.

7.3 Correlation processing for a variety of data formats (VDIF, Mark5B, ADS, OCTAD)

When executing “apri_calc”, data format should be specified using options “-format” or “-formX”, “-formY”. (See “How to execute apri_calc” (section 3.1) for details.) Then use “cor_new”, “fx_cor_new”, “cor_all_new”, “fx_cor_all_new” instead of “cor”, “fx_cor”, “cor_all”, “fx_cor_all”.

8 Update history

2016/05/29 add “cor_new” and “fx_cor_new”

2017/03/03 translated to English

2017/03/06 add two sections “6 Data format coversion” and “D VLBI data format”

2019/09/07 revised due to the addition of new function in “vdifcheck”, “fx_cor_new”, and “vdif2k5”

2019/12/03 revised due to the support of multi-thread VDIF data consisting of single-CH/thread was added to “apri_calc”

2019/12/21 “apri_calc” has been revised to create an appropriate a-priori file in case of using SKED file, even if the frequency and CH correspondence are different for each station when Using SKED file. The option ‘-legacy’ was added to keep compatibility with the old version. Same revision is made to “skdchk”.

A A-priori file format

1. A-priori file structure

A-priori file consists of "section" described by letters starting with '\$' and parameters followed by the section letter. Table 1 shows the list of sections and their order in an a-priori file. \$FORMAT1 and \$FORMAT2 are new sections to define data format other than K5/VSSP. Any letters after '*' in a line are treated as comments.

Table 1. List of sections

\$EXPCODE	<--- experiment title
\$OBS_NUMBER	<--- scan (observation) number
\$STATION1	<--- station 1 (X) information
\$FORMAT1	<--- station 1 data format (new)
\$XYZ-STATION1	<--- station 1 position
\$STATION2	<--- station 2 (Y) information
\$FORMAT2	<--- station 2 data format (new)
\$XYZ-STATION2	<--- station 2 position
\$BASEID	<--- baseline ID
\$FRQ_GRP(1-4)	<--- frequency group
\$FREQUENCY	<--- RF frequency
\$PCAL_FREQ	<--- PCAL (phase calibration) frequency
\$CLOCK	<--- clock parameters
\$SOURCE	<--- radio source name
\$RA	<--- radio source position (right ascension)
\$DEC	<--- radio source position (declination)
\$EPOCH	<--- epoch of radio position
\$GHA	<--- Greenwich hour angle of radio source
\$EOP	<--- earth orientation parameters
\$START	<--- scan start time (UTC)
\$STOP	<--- scan stop time (UTC)
\$APRIORI	<--- a-prio values (PRT, delay, delay rate, delay 2 dots, delay 3 dots)
\$END	<--- end of a-priori file

2. Parameters at each section

\$EXPCODE	section experimet code <i>exp_code</i>
\$OBS_NUMBER	section scan (observation) number <i>n</i>
\$STATION1	section station 1 (X) information <i>station1_name data_file</i>
\$FORMAT1	section station 1 data format (can be omitted for VSSP format) <i>data_format [sampling_info] [thread#]</i>
	data format <i>data_format</i> , sampling information <i>sampling_info</i> and thread information <i>thread#</i> (VDIF only) data format is VDIF M5B OCTAD ADS where VDIF – VDIF format M5B – Mark-5B format OCTAD – OCTAD format ADS – ADS format
	sampling information is sampling frequency (<i>m</i>), # of channels (<i>n</i>) and AD resolution in bits (<i>k</i>), and described as follows. <i>mMHz nCH kbit</i> sampling information can be omitted for VDIF format but it is necessary if VDIF headder doesn't include sampling information thread number (<i>n</i>) starting from 0 is described as follows, THREAD- <i>n</i>
\$XYZ-STATION1	section station 1 position <i>x y z</i>
\$STATION2	section station 2 (Y) information

station2_name data_file station name and data file name
\$FORMAT2 section station 2 data format (can be omitted for VSSP format)
data_format [sampling_info] [thread#] data format *data_format*, sampling information *sampling_info*
 and thread information *thread#* (VDIF only)
\$XYZ-STATION2 section station 2 position
x y z X(m) Y(m) Z(m)
\$BASEID section baseline ID
baseline_id baseline ID (either 2 letters or 4 letters)
\$FRQ_GRP(1-4) section frequency group
n frequency group # (1-4) or 0
 0 means all 16CH processing
\$FREQUENCY section RF frequency
rf-freq side-band [x-ch [y-ch [pol [(thx-thy)]]]] where *rf-freq* – RF frequency (Hz), *side-band* – sideband (U|L)
x-ch – X data CH#, *y-ch* – Y data CH#
pol – polarization information (e.g., XX, YY, RR, RL, ...)
 ‘--’ means no info
thx – thread# for X data (valid for VDIF data)
thy – thread# for Y data (valid for VDIF data)
 default is thread# set at \$FORMAT1,2
\$PCAL_FREQ section PCAL (phase calibration) frequency
pcafreq PCAL frequency (Hz)
\$CLOCK section clock parameters
OFST= c_offset clock offset (s). Positive value menas Y clock tic earlier than X clock tic.
RATE= c_rate clock rate (s/s)
XCOF= xc_offset clock offset (sec) of X station to UTC.
 Positive value menas X clock tic earlier than UTC clock tic.
\$SOURCE section radio source name
srcnam radio source name (8 letters)
\$RA section radio source position (right ascension)
hour minute sec right ascension (hour, minute, second)
\$DEC section radio source position (declination)
deg minute sec declination (degree, minute, second)
\$EPOCH section epoch of radio position
year epoch (year)
\$GHA section Greenwich hour angle of radio source
hour minute sec hour angle (hour, minute, second)
\$EOP section earth orientation parameters
UT1-UTC= ut1mutc UT1-UTC (s)
X_WOBB = wobbx Wobbling X (arcsec)
Y_WOBB = wobby Wobbling Y (arcsec)
\$START section scan start time (UTC)
yyyydddhmmss scan start time (UTC) (yyyy – year, ddd – total day, hh – hour,
 mm – minute, ss – second)
\$START section scan stop time (UTC)
yyyydddhmmss scan stop time (UTC) (year, total day, hour, minute, second)
\$APRIORI section a-prioi values
PRT=yyyydddhmmss PRT (processing reference time) (UTC) (year, total day, hour, minute, second)
TAU0= tau a-priori delay (s)
TAU1= tau1 a-priori delay rate (s/s)
TAU2= tau2 a-priori delay 2-dots (s/s²)
TAU3= tau3 a-priori delay 3-dots (s/s³)
\$END end of a-priori file

3. Examples of a-priori file

Ex.1 in case of K5/VSSP format

```
** This is Apriori file made by apri_calc Ver. 2016-09-29
**      for cor, cor_all, fx_cor, and fx_cor_all
**
** SUBNET ON: PRT is set according to each scan length
**
** Clock parameters at run are as follows,
**   Clock Offset (s) : 0.000000
**   Clock Rate (s/s) : 0.000000
**   Clock Epoch       : 0000/000 00:00:00
**
**
$EXPCODE      <--- section experiment title
KS15002
$OBS_NUMBER    <--- section scan (observation) number
1             <--- scan (observation) number
$STATION1      <--- section X station information
KASHIM11 ./R0020001.dat <--- X station name and datafile name
$XYZ-STATION1  <--- section station X position
-3997505.701700 3276878.404550 3724240.703140 <--- X station position (X Y Z)(m)
$STATION2      <--- section Y station information
KOGANEI ./G0020001.dat <--- Y station name and datafile name
$XYZ-STATION2  <--- section station Y position
-3941937.479090 3368150.907990 3702235.288150 <--- X station position (X Y Z)(m)
$BASEID        <--- section baseline ID
RG            <--- baseline ID (2 letters or 4 letters)
$FRQ_GRP(1-4)   <--- section frequency group
1             <--- frequency group # (1-4)
$FREQUENCY     <--- section RF frequency
7864990000.0 U <--- RF frequency (Hz) and sideband (U|L) for CH #1
7874990000.0 U <--- RF frequency (Hz) and sideband (U|L) for CH #2
7884990000.0 U <--- RF frequency (Hz) and sideband (U|L) for CH #3
8014990000.0 U <--- RF frequency (Hz) and sideband (U|L) for CH #4
$PCAL_FREQ     <--- section PCAL (phase calibration) frequency
10000.0        <--- PCAL frequency (Hz) for CH #1
10000.0        <--- PCAL frequency (Hz) for CH #2
10000.0        <--- PCAL frequency (Hz) for CH #3
10000.0        <--- PCAL frequency (Hz) for CH #4
$CLOCK         <--- section clock parameters
OFST= 0.000000 <--- clock offset (s)
RATE= 0.000000 <--- clock rate (s/s)
XCOF= 0.000000 <--- clock offset (s) of X station to UTC
$SOURCE        <--- section radio source name
3C345          <--- radio source name
$RA            <--- section radio source position (right ascension)
16 42 58.80996700 <--- right ascension (hour, minute, second)
$DEC           <--- section radio source position (declination)
39 48 36.99406000 <--- declination (degree, minute, second)
$EPOCH         <--- section epoch of radio position
2000.0        <--- epoch (year)
$GHA           <--- section Greenwich hour angle of radio source
16 3 23.584000 <--- hour angle (hour, minute, second)
$EOP           <--- section earth orientation parameters
UT1-UTC= 0.000000
X_WOBB = 0.000000
Y_WOBB = 0.000000
$START         <--- section scan start time (UTC)
2015002020000 <--- YYYYDDDHMMSS
```

```

$STOP      <--- section scan stop time (UTC)
2015002020130 <--- YYYYDDDHHMMSS

$APRIORI    <--- section a-prioi values
PRT=2015002020045 <--- PRT(processing reference time) YYYYDDDHHMMSS
TAU0= -8.744597367101878e-05 <--- a-priori delay (s)
TAU1= -1.740376052034359e-08 <--- a-priori delay rate (s/s)
TAU2= 7.147465473084870e-13 <--- a-priori delay 2-dots (s/s^2)
TAU3= 9.254412615463208e-17 <--- a-priori delay 3-dots (s/s^3)
$END      <--- end of a-priori file

```

Ex.2 in case of VDIF format data

```

** This is Apriori file made by apri_calc Ver. 2016-09-29
**      for cor, cor_all, fx_cor, and fx_cor_all
** SUBNET ON: PRT is set according to each scan length
**
** Clock parameters at run are as follows,
**   Clock Offset (s) : 0.000000
**   Clock Rate (s/s) : 0.000000
**   Clock Epoch      : 0000/000 00:00:00
**
$EXPCODE
KS15002
$OBS_NUMBER
1
$STATION1
KASHIM11 ./R0020001.dat
$FORMAT1    <--- section X station data format
VDIF      <--- set VDIF format
$XYZ-STATION1
-3997505.701700 3276878.404550 3724240.703140
$STATION2
KOGANEI ./G0020001.dat
$FORMAT2    <--- section X station data format
VDIF      <--- set VDIF format
$XYZ-STATION2
-3941937.479090 3368150.907990 3702235.288150
$BASEID
RG
$FRQ_GRP(1-4)
0          <--- '0' mean all channels
$FREQUENCY    * RFfreq U|L <pickup ch# for station1> <pickup ch# for station2>
7864990000.0 U <--- RF frequency (Hz) and sideband (U|L) for CH #1 (up to CH #16)
7874990000.0 U
7884990000.0 U
8014990000.0 U
8114990000.0 U
8244990000.0 U
8504990000.0 U
8544990000.0 U
8564990000.0 U
8574990000.0 U
2214990000.0 U
2224990000.0 U
2234990000.0 U
2264990000.0 U
2294990000.0 U
2304990000.0 U <--- RF frequency (Hz) and sideband (U|L) for CH #16
$PCAL_FREQ
10000.0    <--- PCAL frequency (Hz) for CH #1 (up to CH #16)
10000.0
10000.0
10000.0
10000.0
10000.0
10000.0

```

```

10000.0
10000.0
10000.0
10000.0
10000.0
10000.0
10000.0
10000.0
10000.0
10000.0
10000.0
10000.0
10000.0
10000.0
10000.0
10000.0      <--- PCAL frequency (Hz) for CH #1 (up to CH #16)

$CLOCK
OFST= 0.000000
RATE= 0.000000
XCOF= 0.000000

$SOURCE
3C345

$RA
16 42 58.80996700

$DEC
39 48 36.99406000

$EPOCH
2000.0

$GHA
16 3 23.584000

$EOP
UT1-UTC= 0.000000
X_WOBB = 0.000000
Y_WOBB = 0.000000

$START
2015002020000

$STOP
2015002020130

$APRIORI
PRT=2015002020045
TAU0= -8.744597367101878e-05
TAU1= -1.740376052034359e-08
TAU2= 7.147465473084870e-13
TAU3= 9.254412615463208e-17

$END

```

Ex.3 in case of Mark-5B format data

```

** This is Apriori file made by apri_calc Ver. 2016-09-29
**      for cor, cor_all, fx_cor, and fx_cor_all
**
** SUBNET ON: PRT is set according to each scan length
**
** Clock parameters at run are as follows,
**      Clock Offset (s) : 0.000000
**      Clock Rate (s/s) : 0.000000
**      Clock Epoch      : 0000/000 00:00:00
**
**

$EXPCODE
KS15002

$OBS_NUMBER
1

$STATION1
KASHIM11 ./R0020001.dat

$FORMAT1
M5B 16MHz 16CH 1bit <--- set Mark-5B format and sampling information

$XYZ-STATION1
-3997505.701700 3276878.404550 3724240.703140

$STATION2
KOGANEI ./G0020001.dat

$FORMAT2
M5B 16MHz 16CH 1bit <--- set Mark-5B format and sampling information

```

\$XYZ-STATION2
-3941937.479090 3368150.907990 3702235.288150
\$BASEID
RG
\$FRQ_GRP(1-4)
0
\$FREQUENCY
7864990000.0 U
7874990000.0 U
7884990000.0 U
8014990000.0 U
8114990000.0 U
8244990000.0 U
8504990000.0 U
8544990000.0 U
8564990000.0 U
8574990000.0 U
2214990000.0 U
2224990000.0 U
2234990000.0 U
2264990000.0 U
2294990000.0 U
2304990000.0 U
\$PCAL_FREQ
10000.0
10000.0
10000.0
10000.0
10000.0
10000.0
10000.0
10000.0
10000.0
10000.0
10000.0
10000.0
10000.0
10000.0
10000.0
10000.0
10000.0
10000.0
10000.0
\$CLOCK
OFST= 0.000000
RATE= 0.000000
XCOF= 0.000000
\$SOURCE
3C345
\$RA
16 42 58.80996700
\$DEC
39 48 36.99406000
\$EPOCH
2000.0
\$GHA
16 3 23.584000
\$EOP
UT1-UTC= 0.000000
X_WOBB = 0.000000
Y_WOBB = 0.000000
\$START
2015002020000
\$STOP
2015002020130
\$APRIORI
PRT=2015002020045
TAU0= -8.744597367101878e-05
TAU1= -1.740376052034359e-08
TAU2= 7.147465473084870e-13
TAU3= 9.254412615463208e-17
\$END

Ex.4 in case of VSSP format and VDIF format data

```
** This is Apriori file made by apri_calc Ver. 2016-09-29
**      for cor, cor_all, fx_cor, and fx_cor_all
**
** SUBNET ON: PRT is set according to each scan length
**
** Clock parameters at run are as follows,
**   Clock Offset (s) : 0.000000
**   Clock Rate (s/s) : 0.000000
**   Clock Epoch       :      0000/000 00:00:00
**
** $EXPCODE
KS15002
$OBS_NUMBER
1
$STATION1
KASHIM11 ./R0020001.dat
$XYZ-STATION1
-3997505.701700 3276878.404550 3724240.703140
$STATION2
KOGANEI ./G0020001.dat
$FORMAT2
VDIF      <--- set VDIF format for Y station (X station is defalut data format VSSP)
$XYZ-STATION2
-3941937.479090 3368150.907990 3702235.288150
$BASEID
RG
$FRQ_GRP(1-4)
3
$FREQUENCY
8564990000.0 U 1 9    <--- RF frequency for X station CH# and Y station CH#
8574990000.0 U 2 10
2214990000.0 U 3 11
2224990000.0 U 4 12
$PCAL_FREQ
10000.0
10000.0
10000.0
10000.0
$CLOCK
OFST= 0.000000
RATE= 0.000000
XCOF= 0.000000
$SOURCE
3C345
$RA
16 42 58.80996700
$DEC
39 48 36.99406000
$EPOCH
2000.0
$GHA
16 3 23.584000
$EOP
UT1-UTC= 0.000000
X_WOBB = 0.000000
Y_WOBB = 0.000000
$START
2015002020000
$STOP
2015002020130
$APRIORI
PRT=2015002020045
TAU0= -8.744597367101878e-05
TAU1= -1.740376052034359e-08
TAU2= 7.147465473084870e-13
```

```

TAU3= 9.254412615463208e-17
$END

```

Ex.5 in case of VGOS data (VDIF format) –including polarization information–

```

** This is Apriori file made by apri_calc Ver. 2019-06-16
**      for cor, cor_all, fx_cor, and fx_cor_all
**
** (X clock offset wrt UTC is not reflected to a-priori values)
**
** SUBNET ON: PRT is set according to each scan length
**
** Clock parameters at run are as follows,
**   Clock Offset (s) : -4.212500000000000e-04
**   Clock Rate (s/s) : 0.000000
**   Clock Epoch       : 0000/000 00:00:00
**
**
$EXPCODE
v9715a
$OBS_NUMBER
80
$STATION1
SESHAN13 D:\data\CheckAtSHAO\v9715a\sv/v9715asv_no0080_1.10sec.vdif
$FORMAT1
VDIF 64MHz 8CH 2bit
$XYZ-STATION1
-2831686.993000 4675733.639000 3275327.641000
$STATION2
TIANMA13 D:\data\CheckAtSHAO\v9715a\tv/v9715atv_no0080_1.10sec.vdif
$FORMAT2
VDIF 64MHz 8CH 2bit
$XYZ-STATION2
-2826837.140000 4679223.144000 3274511.526000
$BASEID
SVTV
$FRQ_GRP(1-4)
1 2
$FREQUENCY
3480400000.0 L 1 1 XY      <== polarization information XY
3448400000.0 L 2 2 XY
3384400000.0 L 3 3 XY
3320400000.0 L 4 4 XY
3224400000.0 L 5 5 XY
3096400000.0 L 6 6 XY
3064400000.0 L 7 7 XY
3032400000.0 L 8 8 XY
$PCAL_FREQ
0.0
0.0
0.0
0.0
0.0
0.0
0.0
0.0
$CLOCK
OFST= 0.000000
RATE= 0.000000
XCDF= 0.000000
$SOURCE
3C273B
$RA
12 29 6.69972950
$DEC
2 3 8.59828500
$EPOCH

```

```

2000.0
$GHA
15 59 50.752000
$EOP
UT1-UTC= 0.000000
X_WOBB = 0.000000
Y_WOBB = 0.000000
$START
2019196085700
$STOP
2019196085730
$APRIORI
PRT=2019196085715
TAU0= -4.230495720005300e-04
TAU1= -1.445886059562836e-09
TAU2= 1.006184911623976e-14
TAU3= 7.823024635496742e-18
$END

```

4. A-priori file for special processing

By editing parameter at \$FREQUENCY, we can change the number of processing channels, and/or channel allocation between X and Y stations. When the number of channels is changed at \$FREQUENCY, the number of channels at \$PCAL_FREQ should be changed to keep the number of channels same.

Ex.1 change 16CH data to 6CH data and change CH# of Y station

```

$FREQUENCY
7864990000.0 U 1 6
7874990000.0 U 2 5
7884990000.0 U 3 4
8014990000.0 U 4 3
8114990000.0 U 5 2
8244990000.0 U 6 1

$PCAL_FREQ
10000.0
10000.0
10000.0
10000.0
10000.0
10000.0

```

B K5 software correlator output format (Format 7)

line#	items
1	"#FORMAT7" comments — "#FORMAT7" (fixed letters) + comments (comments are program name and fringe rotation parameters) A1~A5 are inserted when filtering process is carried out in "fx_cor"
A1	# BPF parameters (following shows set M-times BPF)
A2(1)	# flow(MHz)-fhigh(MHz) factor : 1.250000-1.450000 1.000000 (1st BPF parameters)
	repeat M times
A2(M)	# flow(MHz)-fhigh(MHz) factor : 1.650000-1.850000 1.000000 (last BPF parameters)
A3	# Adopted frequency resolution (MHz) = 0.040000
A4	# Output lag size = 2048
A5	# FFT size for processing = 2048
	B1~B5 are inserted when PCAL rejection process is carried out in "fx_cor"
B1	# PCAL rejection parameters (in case the number of CH is N)
B2(1)	# CH#01 start_freq(MHz) = 0.40 interval(MHz) = 5.0 (PCAL rejection parameters for CH#01)
	repeat (N times) PCAL rejection parameters
B2(N)	# CH#N start_freq(MHz) = 2.40 interval(MHz) = 5.0 (PCAL rejection parameters for CH#N)
B3	# Bandwidth to reject (MHz) = 0.50
	line# shown below is that for the case without filtering parameters
2	host name — host PC name
3	experiment code
4	scan# (starting from 1)
5	baseline ID
6	date and time of correlation processing (year totalday hour minute second month day)
7	X station name
8	X station position (x,y,z) (m)
9	X data file name
10	Y station name
11	Y station position (x,y,z) (m)
12	Y data file name
13	radio source name
14	radio source right ascension (hour minute second)
15	radio source declination (degree minute second)
16	epoch of radio source position (year)
17	Greenwich apparent sidereal time at PRT (processing reference time) (hour minute second)
18	scan start time (year totalday hour minute second)
19	scan stop time (year totalday hour minute second)
20	PRT (year totalday hour minute second)
21	a-priori delay τ (sec) at PRT
22	a-priori delay rate $\dot{\tau}$ (s/s) at PRT
23	a-priori delay 2-dots $\ddot{\tau}$ (s/s ²) at PRT
24	a-priori delay 3-dots $d\ddot{\tau}/dt$ (s/s ³) at PRT
25	clock offset (sec) and , clock error of X station (sec) (Positive value means Y clock tic earlier than X clock tic) (Positive value means X clock tic earlier than UTC clock tic)
26	clock rate (s/s)
27	UT1-UTC (sec) Wob X (arcsec) Wob Y (arcsec) — earth orientation parameters
28	# of channels [N]
29	CH-1 RF frequency (Hz), PCAL frequency (Hz), sideband (1:USB, 0:LSB)[, X-ch#, Y-ch#[, polarization]]

.	...
29+N	CH-N RF frequency (Hz), PCAL frequency (Hz), sideband (1:USB, 0:LSB)[, X-ch#, Y-ch#[, polarization]]
30+N	sampling frequency (Hz)
31+N	X station AD resolution (1, 2, 4 or 8) Y station AD resolution (can be omitted)
32+N	unit integration period of PP (parameter period) (sec)
33+N	total integration period (sec)
34+N	# of lags [L]
35+N	total # of PP [K]
36+N	"PP# 1" — PP#1 start of correlation result
repeat N×L times	lag#, CH#, real part of correlation data, imaginary part of correlation data
36+N(1+L)	"VALIDITY FLAG, FRACTIONAL BIT and FRINGE PHASE (APRIORI)" — fixed letters
37+N(1+L)	vflag dtime ibit fbit frphase1 [frphase2 frphase3 frphase4 frphaseN] where vflag – data validity flag (1: OK, 0: error occurred at the previous PP) dtime – time at BOPP (beginning of PP) (seconds from 0h UTC) ibit – integer delay at BOPP (in unit of sampling period) fbit – fractional portion of delay at BOPP (in unit of sampling period) frphase1 – apriori fringe pahse (deg) at BOPP for ch #1 frphase2 – apriori fringe pahse (deg) at BOPP for ch #2 frphase3 – apriori fringe pahse (deg) at BOPP for ch #3 frphase4 – apriori fringe pahse (deg) at BOPP for ch #4 frphaseN – apriori fringe pahse (deg) at BOPP for ch #N
38+N(1+L)	"X-PCAL" — fixed letters to show start of PCAL information for X station
39+N(1+L)	m ns PCALR PCALI AMP PHASE where m – channel # ns – # of samples used for PCAL detection PCALR – real part of PCAL detection PCALI – imaginary part of PCAL detection AMP – PCAL amplitude PHASE – PCAL phase (deg)
repeat N (# of channels) times	
39+N(2+L)	"Y-PCAL" — fixed letters to show start of PCAL information for X station
40+N(2+L)	m ns PCALR PCALI AMP PHASE — PCAL data for Y station repeat N (# of channels) times
40+N(3+L)	"PP# 2" — PP#2 start of correlation result
repeat K (total # of PPs) times	
...	

C KSP correlator output format including extension

On the bandwidth processing using "KOMB" software package, COUT type correlation data file which is the ouput of K5 software correlator are converted to KSP correlation data at first, then processed by KOMB. The number of lags of the original KSP format is fixed to 32, however it is required to increase the number of lags more than 32 these days. Therefore KSP format is extended to support the large number of lags.

Header portion (HD: 512 bytes) of extended format is almost same as that of the original format, but "F" (meaning FULL) is added as the "CRSMODE". The size of correlation counter is changed from 24 bits to 32 bits for "F" mode. Furthermore add "LAG" for lag size and "ADBIT" for AD resolution.

Correlation data (CD) of each integration period PP (parameter period) consists of correlation data of each channel unit (UD) like the original format, but UD can be extended by 256 bytes according to the lag size. Therefore items in UD were changed largely.

HD 512 bytes	CD	CD	...
-----------------	----	----	-----

Figure C.1. Record structure of KSP correlation data format. HD: header, CD:correlation data by PP.

CD(correlation data by PP)				
UD (1unit)	UD (2unit)	UD (3unit)	...	UD (K unit)

Figure C.2. Record structure in CD by PP. UD:unit (channel) data.

Correlation data by UD (channel)				
UD#0 256 bytes	UD#1 256 bytes	UD#2 256 bytes	...	UD# N 256 bytes

Figure C.3. Record structure in UD (unit data). UD#0 includes time information, and 32-lag correlation data are contained in UD#1 and after. In case of 64-lag data, it finish in UD#2. In case of 1024-lag data, UD# continues upto 32.

C.1 Correlation data format: header record (HD)

Table 1. KSP correlation data format: header record (HD: 512bytes)

symbol	# of bytes	byte position	type	note
EXCODE	10	1	A10	experiment code (A10)
NOBS	2	11	I*2	scan #
LFILE	6	13	A6	correlation file name (A6)
LBASE	2	19	A2	baseline ID (A2)
NPP	2	21	I*2	# of PPs
NPPSEC	2	23	I*2	period of PP
				unit is sec for FMTFLAG “KSP” and “K4”
				unit is 10 msec for FMTFLAG “KSP1”
				unit is 1 msec for FMTFLAG “KSP2”
NKOMB	2	25	I*2	# of KOMB processings
KRDATE	8	27	I*2	correlation processing date and time DIM(4) (year, total day, hour, minute)
KBFILE	6	35	A6	KOMB out file name (set by KOMB)
SRCNAM	8	41	A8	radio source name (A8)
SRCRA	4	49	I*2	DIM(2) right ascension of radio source (α) (hour, minute) J2000
	8	53	R*8	right ascension of radio source (α) (second) J2000
SRCDEC	4	61	I*2	DIM(2) declination of radio source (δ) (degree, minute) J2000
	8	65	R*8	declination of radio source (δ) (second) J2000
IPRT	10	73	I*2	DIM(5) PRT (processing reference time) (almost center of scan length) (year, total day, hour, minute, second)
STATX	8	83	A8	X station name (A8)
STATY	8	91	A8	Y station name (A8)
X_XYZ	24	99	R*8	DIM(3) X station position (X , Y , Z)(m)
Y_XYZ	24	123	R*8	DIM(3) Y station position (X , Y , Z)(m)
OSTART	10	147	I*2	DIM(5) scan start time (year, total day, hour, minute, second)
OSTOP	10	157	I*2	DIM(5) scan stop time (year, total day, hour, minute, second)
SRCGHA	4	167	I*2	DIM(2) Greenwich hour angle of source at PRT (hour, minute)
	8	171	R*8	Greenwich hour angle of source at PRT (second)
TSAMPL	4	179	R*4	sampling period (sec)
VBW	4	183	R*4	video bandwidth (Hz)
NCH	2	187	I*2	# of channel at correlation processing
ACLKO	4	189	R*4	clock offset (sec) at PRT
				positive value menas Y clock tic earlier than X clock tic
ACLKR	4	193	R*4	clock rate difference at PRT (s/s)
DLYINX	4	197	R*4	instrumental delay difference at X band (sec)
DLYINS	4	201	R*4	instrumental delay difference at S band (sec)
AXCLKE	4	205	R*4	clock error of X station (sec) at PRT.
				positive value menas X clock tic earlier than UTC clock tic
PI	8	209	R*8	π
C	8	217	R*8	light speed (m/s)
FRQTAB	128	225	R*8	DIM(16) RF frequency table(Hz) +VE: USB, -VE: LSB
PCALF	64	353	R*4	DIM(16) PCAL (phase calibration) frequency table (Hz)

APTAU	32	417	R*8	DIM(4) a-priori values of delay etc. $\tau(\text{sec}), \dot{\tau}(\text{s/s}), \ddot{\tau}(\text{s/s}^2), \dddot{\tau}(\text{s/s}^3)$
SRCH	2	449	I*2	common channel # for fringe search mode (1~16)
CMODE	2	451	A2	KSP hardware correlator mode “NO”: normal mode, “SE”: fringe search mode
UINT	2	453	I*2	# of lags between units in case of fringe search mode (default is 30)
CUNIT	2	455	I*2	unit # that includes 0 lag in case of fringe search mode
CRLDBL	8	457	R*8	8-byte real value set from KSP control work station (unused)
CRLNG	4	465	I*4	4-byte integer value set from KSP control work station (unused)
CRLSHT	2	469	I*2	2-byte integer value set from KSP control work station (unused)
FRGMOD	2	471	A2	fringe stopping mode “CO”: continuous, “EV”: initialize each PP
CRSMODE	1	473	A1	flag of integration counter resolution for correlation and PCAL detection “U”: take upper 24 bits from 28-bit counter, “L”: take lower 24 bits “H”: take upper 24 bits from 32-bit counter “F”: take full 32 bits from 32-bit counter
VER	8	474	A8	version of correlator ROM for hardware correlator. in case of CRSMODE=“F”, set “K5-WIDE”
—	1	482	—	unused
JXOFST	4	483	I*4	delay offsets of X station data in case hardware correlator (in unit of sample)
JYOFST	4	487	I*4	delay offsets of Y station data in case hardware correlator (in unit of sample)
LAG	4	491	I*4	# of lags in case of CRSMODE=“F” unused or 32 in case of CRSMODE is not equal to “F”
ADBIT	4	495	I*4	AD resolution (bits)
ADBITY	4	499	I*4	AD resolution of Y station when CORTYPE is set
CORTYPE	2	503	A2	correlator type “Xf” for XF or “Fx” for FX
—	4	505	—	unused
FMTFLAG	4	509	A4	format ID. “KSP”, “K4”, “KSP1”, “KSP2”

C.2 Correlation data file format (in case of CRSMODE=“F”): correlation data by unit (UD)

Format is the same as the original one in case that CRSMODE is not “F”.

Table 2. KSP correlation data format (UD#0)(1st 256 bytes)

symbol	# of bytes	byte position	type	note
RMKS	2	1	2BYTE	remarks set by correlator byte #1: KSEL (K value at fringe rotation) byte #2: BIT#(LSB=0) 7-3: channel # (1-16) 2: delete flag set by KOMB 1:delete 1-0: unused
COFLG	1	3	BYTE	correlation flag BIT#(LSB=0) 7-6: sign of fringe rotation 10 ... negative rotation 00 ... sign reversal occurred during PP 01 ... positive rotation 5: mode of fringe rotator 1 ... carried out by hardware 0 ... carried out by software 4: fringe stopping reference frequency 1 ... at center of baseband bandwidth 0 ... at baseband frequency 3: flag for fractiona bit correction 1 ... carried out by hardware 0 ... carried out by software 2: PP parameter update flag 1 ... updated 0 ... not updated 1-0: unused
TWESTS	1	4	BYTE	integration status BIT#(LSB=0) 7: AVL integration validity flag 1 ... valid 0 ... invalid 6-0: unused
**** items below are changed largely ****				
TIMX	7	5	14×4bits	X station time label: YYDDDHMMSSmmm (by hexadecimal)
TIMY	7	12	14×4bits	X station time label:YYDDDHMMSSmmm (by hexadecimal)
TMDIFF	4	19	I*4	offset of X and Y time siries (unit of sample) positive for Y station time is ahead
FRADD	4	23	32bits	fringe rotator address (32 bits) at the end of PP when fringe stopping is carried out, a-priori fringe rotator address at PP.
IFBIT	2	27	I*2	fractional part of delay in the unit of sample at PP. -32768 ~ 32767 corresponds to -0.5 ~ +0.5.
MODE	1	29	BYTE	versatile mode (unused) BIT#(LSB=0) 7-2: unused 1: 2/1 bit mode

					1 ... 2-bit correlation (K4 hardware correlator only) 0 ... 1-bit correlation 2: weight mode at 2-bit correlation 1 ... Weight mode 0 ... Binary binary mode
IPP	2	30	I*2	PP#	
PCALD	16	32	I*4	DIM(4) counter value for PCAL detection real part for X station (4 bytes) imaginary part for X station (4 bytes) real part for Y station (4 bytes) imaginary part for Y station (4 bytes)	
COUNTP	8	48	I*4	DIM(2) total # of samples for PCAL detection (real part 4 bytes, imaginary part 4 bytes)	
—	—	56	—	unused	

Table 3. KSP correlation data format (UD#1)(256 bytes)

symbol	# of bytes	byte position	type	note
CROSP	4	1	I*4	lag #1 real part of correlation data
	4	5	I*4	lag #2 real part of correlation data
		...		
	4	125	I*4	lag #32 real part of correlation data
	4	129	I*4	lag #1 imaginary part of correlation data
	4	133	I*4	lag #2 imaginary part of correlation data
		...		
	4	253	I*4	lag #32 imaginary part of correlation data

When the number of lags is larger than 32, UD records are added by 256 bytes (32 lags) as follows.

Table 4. KSP correlation data format (UD#2)(256 bytes)

symbol	# of bytes	byte position	type	note
CROSP	4	1	I*4	lag #33 real part of correlation data
	4	5	I*4	lag #34 real part of correlation data
		...		
	4	125	I*4	lag #64 real part of correlation data
	4	129	I*4	lag #33 imaginary part of correlation data
	4	133	I*4	lag #34 imaginary part of correlation data
		...		
	4	253	I*4	lag #64 imaginary part of correlation data

Table 5. KSP correlation data format (UD#N)(256 bytes)

symbol	# of bytes	byte position	type	note
CROSP	4	1	I*4	lag #32 × (N - 1) + 1 real part of correlation data
	4	5	I*4	imaginary
	4	9	I*4	part
	4	13	I*4	lag # 32 × (N - 1) + 2 real part of correlation data
				imaginary
				part
				...
	4	249	I*4	lag # 32 × N64 real part of correlation data
	4	253	I*4	imaginary part

**C.3 Correlation data file format (in case that CRSMODE is not “F”):
correlation data by unit (UD)**

Table 6. KSP correlation data format (UD)(256 bytes

symbol	# of bytes	byte position	type	note
RMKS	2	1	2BYTE	remarks set by correlator byte #1: KSEL (K value at fringe rotation) byte #2: BIT#(LSB=0) 7-3: channel # (1-16) 2: delete flag set by KOMB 1:delete 1-0: unused
COFLG	1	3	BYTE	correlation flag BIT#(LSB=0) 7-6: sign of fringe rotation 10 ... negative rotation 00 ... sign reversal occurred during PP 01 ... positive rotation 5: mode of fringe rotator 1 ... carried out by hardware 0 ... carried out by software 4: fringe stopping reference frequency 1 ... at center of baseband bandwidth 0 ... at baseband frequency 3: flag for fractiona bit correction 1 ... carried out by hardware 0 ... carried out by software 2: PP parameter update flag 1 ... updated 0 ... not updated 1-0: unused
TWESTS	1	4	BYTE	integration status BIT#(LSB=0) 7: AVL integration validity flag 1 ... valid 0 ... invalid 6-0: unused
CROSP	192	5	I*3	DIM(64) correlation data (reset every PP) (real part 3 bytes × 32 lags, imaginary part 3 bytes × 32 lags) according to CRSMODE in HD “L”: take lower 24 bits from 28-bit counter, “U”: take upper 24 bits “H”: take 24 bits from 32-bit counter
COUNTP	8	197	I*4	DIM(2) # of samples for correlation (real part 4 bytes, imaginary part 4 bytes)
PCALD	12	205	I*3	DIM(4) PCAL detection counter (reset every PP) real part (3 bytes) for X station imaginary part (3 bytes) for X station real part (3 bytes) for Y station imaginary part (3 bytes) for Y station according to CRSMODE in HD “L”: take lower 24 bits from 28-bit counter, “U”: take upper 24 bits “H”: take 24 bits from 32-bit counter

TIMX	7	217	14×4bits	X station time label: YYDDDHHMMSSmmm (by hexadecimal)
TIMY	7	224	14×4bits	X station time label: YYDDDHHMMSSmmm (by hexadecimal)
TMDIFF	4	231	I*4	offset of X and Y time series (unit of sample) positive for Y station time is ahead
FRADD	4	235	32bits	fringe rotator address (32 bits) at the end of PP when fringe stopping is carried out, a-priori fringe rotator address at PP.
IFBIT	2	239	I*2	fractional part of delay in the unit of sample at PP. −32768 ~ 32767 corresponds to −0.5 ~ +0.5.
MODE	1	241	BYTE	versatile mode (unused) BIT#(LSB=0) 7-2: unused 1: 2/1 bit mode 1 … 2-bit correlation (K4 hardware correlator only) 0 … 1-bit correlation 2: weight mode at 2-bit correlation 1 … Weight mode 0 … Binary binary mode
IPP	2	242	I*2	PP#
—	13	244	—	unused

D VLBI data format

D.1 Type of data format

There are two types of VLBI data. One is that consisting of frame data (Type-1), the other is non-frame data (Type-2). The former is further divided into two types Type-1A and 1B. In case of Type-1A, a part of the data portion is substituted by the header, i.e., sampled data are lost at the header portion, while in case of Type-1B, the header is inserted in the data, so that any sampled data are lost (Fig.D.1). When VLBI technique was realized, data were only the Type-1A format (Mark-III, Mark-IV, K3). However, Type-1B (VLBA, Mark-5B, VDIF, K5/VSSP, VSSP32/64, ADS/DBBC mode) is nowadays used commonly. Type-2 format (OCTAD, ADS/raw mode) is also used in some samplers.

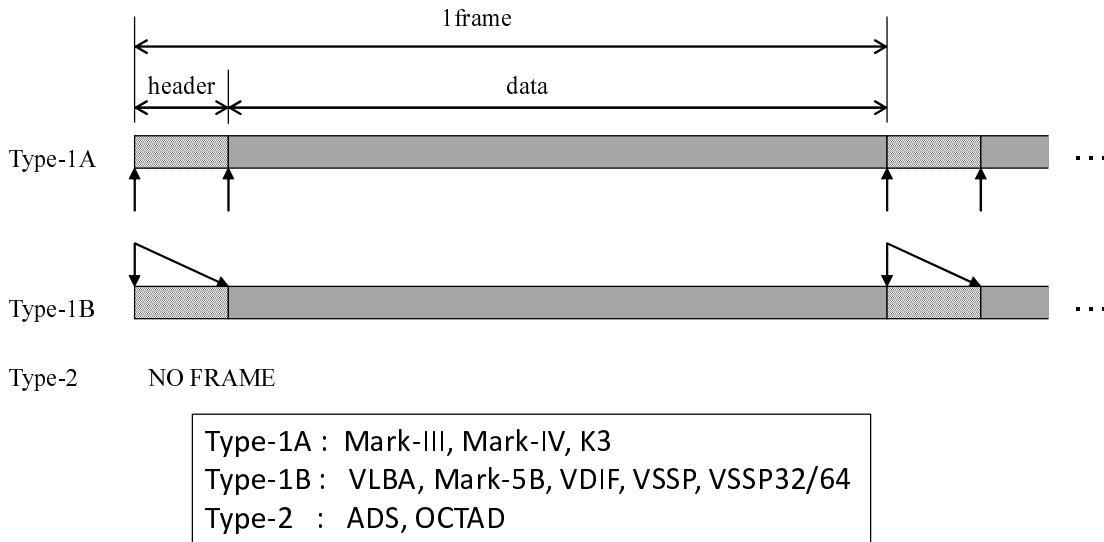


Figure D.1. Type of VLBI data structures

Table D.1 shows the comparison of data formats.

Table D.1. Comparison of data formats

	Frame length (bytes)	Header length (bytes)	Data (bytes)
Mark-III/IV, K3	2500	20	2480
VLBA	2520	20	2500
Mark-5B	10016	16	10000
VDIF	variable	32	variable
VSSP	1 frame/sec	8	variable
VSSP32/64	1 frame/sec	32	variable

Among these formats, VSSP format (including K5/VSSP32, K5/VSSP64) specified NICT, Mark-5B, and VDIF are described in sub-sections below.

D.2 K5/VSSP, VSSP32 and VSSP64 format

D.2.1 Data structure

K5/VSSP, K5/VSSP32, and K5/VSSP64 sampler output is made up of multiple frames, which consist of a header and a data block (Fig.D.2). A header block of VSSP consists of 8-byte data which contain two sync blocks, time information, and sampling parameters. A header block of VSSP32 usually consists of 32-byte data, of which first 8-byte data are as same as that of VSSP excepting the second sync pattern. A rest of header block contains year, date, and user definable auxiliary field. (When VSSP64 sampler operates with a VSSP32

mode, the header block is as same as that of VSSP32. When VSSP64 operates as its native mode, the second sync pattern differs.) A header block doesn't affect a data block, i.e., no data are lost by the insertion of the header block.

The size of a data block can be expressed by [sampling frequency (Hz)] \times [# of AD bits] \times [# of channels], however actual size is limited by the maximum data rate between a sampler and host PC. In case of VSSP, which adopts PCI-bus interface, 64 Mbits/sec is maximum data transfer speed. As for VSSP32, which adopts USB-2.0 interface, the maximum data speed is 256 Mbits/sec. As for VSSP64, which adopts USB-3.0 interface, the practical maximum data speed is 1024 Mbits/sec.




Figure D.2. Data structure of K5/VSSP, K5/VSSP32, or K5/VSSP64 sampler output.

D.2.2 VSSP header format

Fig.D.3 shows VSSP header format. It consists of 8 byte data.

bit	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
W0	Sync Pattern : '0xFFFFFFFF'																															
W1	2nd Sync Pattern '0x8B' AD SFREQ CH seconds from 0h UTC (17bits)																															

AD: AD bits Index 0: 1bit, 1: 2bits, 2: 4bits, 3: 8bits

SFREQ: Sampling frequency Index (Note: sampling frequency larger than 32MHz MHz is for format conversion)

0: 40kHz, 1: 100kHz, 2: 200kHz, 3: 500kHz, 4: 1MHz, 5: 2MHz, 6: 4MHz, 7: 8MHz, 8: 16MHz, 9: 32MHz,

10: 64MHz, 11: 128MHz, 12: 256MHz, 13: 512MHz, 14: 1024MHz, 15: 2048MHz

CH: number of channels 0: 1channel, 1: 4channels

Figure D.3. VSSP header format (8 bytes)

where

- sync pattern – 0xFFFFFFFF
- 2nd sync pattern – 0x8B (0x8C for VSSP32, 0x8D for VSSP64)
- AD – number of AD resolution bits
0: 1 bit / 1: 2 bits / 2: 4 bits / 3: 8 bits
- SFREQ – index for sampling frequency
(Note: sampling frequencies faster than and equal to 32 MHz are for supporting data converted from other format data)
0: 40kHz / 1: 100kHz / 2: 200kHz / 3: 500kHz
4: 1MHz / 5: 2MHz / 6: 4MHz / 7: 8MHz / 8: 16MHz
9: 32MHz / 10: 64MHz / 11: 128MHz / 12: 256MHz / 13: 512MHz
14: 1024MHz / 15: 2048MHz
- CH – number of channels used 0: 1ch 1: 4ch
- time – seconds from 00h00m00s (0~86399)

D.2.3 VSSP32 and VSSP64 header format (general specifications)

Fig.D.4 shows the specifications of VSSP32 and VSSP64 data header. All current K5 utilities adopt 20 bytes for the size of auxiliary field, so that total size of header is 32 bytes.

bit	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0														
W0	Sync Pattern : '0xFFFFFFFF'																																													
W1	2nd Sync Pattern '0x8C' '0x8D' for VSSP64 mode		AD	SFREQ	CH	seconds from 0h UTC (17bits)																																								
W2	major version #	minor version #	AUX FIELD size (bytes) (8 bits) (default=20)			EF ch	year (2 digits) (6 bits)			total day (9 bits)										AUX FIELD Format #																										
W3																																														
W4																																														
W5																																														
W6																																														
W7																																														

AD: AD bits Index 0: 1bit, 1: 2bits, 2: 4bits, 3: 8bits

SFREQ: Sampling frequency Index (Note: maximum is 64MHz for VSSP32, 128MHz for VSSP64.

sampling frequency larger than 128MHz MHz is for format conversion)

0: 40kHz, 1: 100kHz, 2: 200kHz, 3: 500kHz, 4: 1MHz, 5: 2MHz, 6: 4MHz, 7: 8MHz, 8: 16MHz, 9: 32MHz,

10: 64MHz, 11: 128MHz, 12: 256MHz, 13: 512MHz, 14: 1024MHz, 15: 2048MHz

CH: number of channels 0: 1channel, 1: 4channels

EF: error flag 1: error occurred in the just before frame

ch: 2ch flag for VSSP64 mode 1: 2ch, 0: follow CH flag

Figure D.4. General specifications of VSSP32 and VSSP64 data header.

where

- sync pattern – 0xFFFFFFFF
- 2nd sync pattern – 0x8B (0x8C for VSSP32, 0x8D for VSSP64)
- AD – number of AD resolution bits
0: 1 bit / 1: 2 bits / 2: 4 bits / 3: 8 bits
- SFREQ – index for sampling frequency
(Note: sampling frequencies faster than and equal to 32 MHz are for supporting data converted from other format data)
0: 40kHz / 1: 100kHz / 2: 200kHz / 3: 500kHz
4: 1MHz / 5: 2MHz / 6: 4MHz / 7: 8MHz / 8: 16MHz
9: 32MHz / 10: 64MHz / 11: 128MHz / 12: 256MHz / 13: 512MHz
14: 1024MHz / 15: 2048MHz
- CH – number of channels used 0: 1ch 1: 4ch
if '1' is set at EF in case of VSSP64 mode, # of channels is 2
- time – seconds from 00h00m00s (0~86399)
- major version # – major version # of VSSP32 control ROM
- minor version # – minor version # of VSSP32 control ROM
- AUX FIELD size – size of auxiliary field (bytes)
- EF – error flag (set when error occurred in a previous frame)
in case of VSSP64, '1' means 2-ch mode
- year – lower 2 digits of year
- total day – day of year
- AUX FIELD Format # – format # of auxiliary field
format #

User can define the portion of "AUX FIELD" freely except for the first byte of auxiliary field, which is defined as the format number. When user defines a new format, confliction with the format number, that is predefined or reserved, should be avoid.

D.2.4 Predefined and reserved format numbers

Table.D.4 summarizes predefined and reserved format numbers for auxiliary field.

Table D.4. Predefined and reserved format numbers

Format #	Note
0	for test
1	for observation (“autoobs” output data format)
2	for observation (“sampling” output data format)
30~39	reserved (for ISAS group)
85	for test
170	for test
21	extended format No.1 (to support arbitrary sampling frequency and channels up to 16)
22	extended format No.2 (to support arbitrary sampling frequency, # of AD bits, and channels)

Predefined format numbers are 0, 1, 2, 85, 170, 21, and 22. Numbers 30~39 are reserved for ISAS group. Format #21 and #22 are defined to support arbitrary sampling frequency and channels up to 16 (arbitrary # of AD bits for #22). This format allows to combine multiple sampler output. It is also possible to convert data obtained by a sampler other than VSSP-type sampler to VSSP32 format data.

Format #0

bit	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																					
W0	Sync Pattern : '0xFFFFFFFF'																																																				
W1	2nd Sync Pattern '0x8C' '0x8D' for VSSP64 mode																																																				
W2	major version #		minor version #		AUX FIELD size (bytes) (8 bits) (20)		EF	ch	year (2 digits) (6 bits)		total day (9 bits)																	AUX FIELD Format # (0)																									
W3	All 0 data																																																				
W4	All 0 data																																																				
W5	All 0 data																																																				
W6	All 0 data																																																				
W7	All 0 data																																																				

Figure D.5. VSSP32 format #0

Format #1

This is “autoobs” output data format.

bit	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																						
W0	Sync Pattern : '0xFFFFFFFF'																																																					
W1	2nd Sync Pattern '0x8C' '0x8D' for VSSP64 mode			AD	SFREQ	CH	seconds from 0h UTC (17bits)																																															
W2	major version #	minor version #	AUX FIELD size (bytes) (8 bits) (20)			EF ch	year (2 digits) (6 bits)			total day (9 bits)										LPF frequency (MHz) 0 means through																																		
W3	Station ID (max 2 characters)										AUX FIELD Format # (1)										Station name (max 8 characters)																																	
W4	PC host name (max 8 characters)																																																					
W5																																																						
W6																																																						
W7																																																						

Figure D.6. VSSP32 format #1

Format #2

This is “sampling” output data format.

bit	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																							
W0	Sync Pattern : '0xFFFFFFFF'																																																						
W1	2nd Sync Pattern '0x8C' '0x8D' for VSSP64 mode			AD	SFREQ	CH	seconds from 0h UTC (17bits)																																																
W2	major version #	minor version #	AUX FIELD size (bytes) (8 bits) (20)			EF ch	year (2 digits) (6 bits)			total day (9 bits)										LPF frequency (MHz) 0 means through										AUX FIELD Format # (1)																									
W3	filler data '0x5555'										AUX FIELD Format # (2)										filler data '0x55555555'																																		
W4																																																							
W5																																																							
W6																																																							
W7																																																							

Figure D.7. VSSP32 format #2

Format #85

bit	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																																	
W0	Sync Pattern : '0xFFFFFFFF'																																																																
W1	2nd Sync Pattern '0x8C' '0x8D' for VSSP64 mode																																																																
W2	major version #	minor version #	AUX FIELD size (bytes) (8 bits) (20)										EF	ch	seconds from 0h UTC (17bits) year (2 digits) (6 bits)						total day (9 bits)																																												
W3	filler data '0x5555'												LPF frequency (MHz) 0 means through				AUX FIELD Format # (85) (85=0x55)																																																
W4	filler data '0x55555555'																																																																
W5	filler data '0x55555555'																																																																
W6	filler data '0x55555555'																																																																
W7	filler data '0x55555555'																																																																

Figure D.8. VSSP32 format #85

Format #170

bit	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																																	
W0	Sync Pattern : '0xFFFFFFFF'																																																																
W1	2nd Sync Pattern '0x8C' '0x8D' for VSSP64 mode																																																																
W2	major version #	minor version #	AUX FIELD size (bytes) (8 bits) (20)										EF	ch	seconds from 0h UTC (17bits) year (2 digits) (6 bits)						total day (9 bits)																																												
W3	filler data '0xAAAA'												LPF frequency (MHz) 0 means through				AUX FIELD Format # (170) (170=0xAA)																																																
W4	filler data '0xAAAAAAAA'																																																																
W5	filler data '0xAAAAAAAA'																																																																
W6	filler data '0xAAAAAAAA'																																																																
W7	filler data '0xAAAAAAAA'																																																																

Figure D.9. VSSP32 format #170

Format #21 (extended format No.1)

This format supports arbitrary sampling frequency and channels up to 16. Sampling frequency and # of channels are newly defined in the AUX field

bit	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																						
W0	Sync Pattern : '0xFFFFFFFF'																																																					
W1	2nd Sync Pattern '0x8C' '0x8D' for VSSP64 mode																																																					
W2	major version #	minor version #	AUX FIELD size (bytes) (8 bits) (20)										year (2 digits) (7 bits)							total day (9 bits)																																		
W3	sampling frequency (MHz: 13 bits) *2										# of CH (2^n)	LPF frequency (MHz) 0 means through							AUX FIELD Format # (21)																																			
W4	any data (or 16 characters)																																																					
W5	any data (or 16 characters)																																																					
W6	any data (or 16 characters)																																																					
W7	any data (or 16 characters)																																																					

*1: this is effective only when sampling frequency in AUX field is set to 0.

*2: when 0 is set here, SFREQ becomes valid

*3: the number of channels is expressed by 2^n where 'n' is set to this field

Figure D.10. VSSP32 format #21

where # of channels are defined by n , then # of channels is given by 2^n . n is 0,1,2,3,4, so that maximum # of channels is 16. Sampling frequency (MHz) in the AUX field is specified by 13-bit integer.

Format #22 (extended format No.2)

This format supports arbitrary sampling frequency, arbitrary # of channels, and arbitrary # of AD bits. They are newly defined in the AUX field.

bit	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0													
W0	Sync Pattern : '0xFFFFFFFF'																																												
W1	2nd Sync Pattern '0x8C' '0x8D' for VSSP64 mode																																												
W2	major version #	minor version #	AUX FIELD size (bytes) (8 bits) (20)										year (2 digits) (7 bits)							total day (9 bits)																									
W3	sampling frequency (positive: MHz, negative: kHz) *1										LPF frequency (MHz) 0 means through							AUX FIELD Format # (22)																											
W4	AD bits																																												
W5	any data (or 14 characters)																																												
W6	any data (or 14 characters)																																												
W7	any data (or 14 characters)																																												

*1 : 16-bit signed integer

Figure D.11. VSSP32 format #22

D.2.5 VSSP data block

Sampled data output from the VSSP or VSSP32 sampler consists of 4-byte (32-bit) unit. Figs.D.12 and D.13 show the relation among bit position, sample number, and channel number in a 32-bit unit.

bit position	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
1ch x 1bit	sample #	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
1ch x 2bit	sample #	15	14		13	12		11	10		9		8		7		6		5		4		3		2		1		0				
1ch x 4bit	sample #		7			6			5			4				3			2			1									0		
1ch x 8bit	sample #				3				2								1														0		

Figure D.12. Data block format for 1-ch mode.

bit position	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
4ch x 1bit	ch #	4	3	2	1	4	3	2	1	4	3	2	1	4	3	2	1	4	3	2	1	4	3	2	1	4	3	2	1	4	3	2	1
	sample #		7			6			5			4				3			2			1										0	
4ch x 2bit	ch #	4	3		2	1	4	3		2	1	4	3		2	1	4	3		2	1	4	3		2	1	4	3		2	1	1	
	sample #			3				2			1			1			1			0											0		
4ch x 4bit	ch #		4		3		2		1			4			3			2			1			0							1		
	sample #				1																											1	
4ch x 8bit	ch #			4			3					2				1			2												1		
	sample #						0																										

Figure D.13. Data format for 4-ch mode

D.2.6 Data block format for Format #21 and #22 (extended format)

Format #21 (extended format) supports 2, 8, and 16-ch mode besides 1 and 4-ch mode as shown in Figs.D.14 , D.15 , and D.16. As for 8-ch mode and 8-bit AD, 8 bytes (64 bits) are required for 1 sample data at a time. As for 16-ch mode, 8 bytes (64 bits) are required for 4-bit AD and 16 bytes (128 bits) for 8-bit AD for 1 sample data.

Format #22 (extended format) supports arbitrary sampling frequency, arbitrary # of channels, and arbitrary # of AD bits.

bit position	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
2ch x 1bit	ch #	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	
	sample #	15	14		13	12		11	10		9		8		7		6		5		4		3		2		1		0			
2ch x 2bit	ch #	2	1		2	1		2	1		2		1		2		1		2		1		2		1		2		1		1	
	sample #		7			6			5			4			3			2			1									0		
2ch x 4bit	ch #		2			1			2			1			2			1			1									0		
	sample #			3				2										1												0		
2ch x 8bit	ch #			2				1				1				2															1	
	sample #							1																							0	

Figure D.14. Extended data format for 2-ch mode.

bit position	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
8ch x 1bit	ch #	8	7	6	5	4	3	2	1	8	7	6	5	4	3	2	1	8	7	6	5	4	3	2	1	8	7	6	5	4	3	2	1
	sample #				3					2								1													0		
8ch x 2bit	ch #	8	7	6	5		4		3		2		1		8		7		6		5		4		3		2		1				
	sample #						1																								0		
8ch x 4bit	ch #		8		7		6		5						4		3		2											1			
	sample #														0																		
8ch x 8bit	ch #				4				3							2															1		
	sample #								0																								

Figure D.15. Extended data format for 8-ch mode.

	bit position	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
16ch x 1bit	ch #	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1		
	sample #									1																						0			
16ch x 2bit	ch #	16	15	14	13	12	11	10	9																							1			
	sample #																														0				
16ch x 4bit	ch #	8				7				6				5				4			3				2				1						
	sample #																														0				
bit position	63	62	61	60	59	58	57	56	55	54	53	52	51	50	49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32			
ch #	16									15							14			13				12				11				10			9
sample #																																			
bit position	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
ch #																	4																		1
sample #																																			
bit position	63	62	61	60	59	58	57	56	55	54	53	52	51	50	49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32			
ch #																																			5
sample #																																			
bit position	95	94	93	92	91	90	89	88	87	86	85	84	83	82	81	80	79	78	77	76	75	74	73	72	71	70	69	68	67	66	65	64			
ch #																	12			11														9	
sample #																																			
bit position	127	126	125	124	123	122	121	120	119	118	117	116	115	114	113	112	111	110	109	108	107	106	105	104	103	102	101	100	99	98	97	96			
ch #																	16			15														13	
sample #																																			0

Figure D.16. Extended data format for 16-ch mode.

The size of data block should be an integer multiple of a 4-byte (32-bit) unit. In case when a fractional figure occurs, a rest of data block is filled by ‘0’. How to define the size of data block is as follows. The size of data sampled in 1 sec can be calculated as

$$B = F \cdot A \cdot N \quad [\text{bits}]$$

where F , A , and N are sampling frequency (Hz), the number of AD bits, and the number of channels, respectively. If $B/32$ has a fractional part (not an integer), the size of data block is defined as follows,

$$S = (\text{int}(B/32) + 1) \times 32 \quad [\text{bits}]$$

when int is a function which returns the integer part of a specified number. Then a rest of data block starting from $B + 1$ bits is filled out by ‘0’. If $B/32$ is an integer, S is set to be B .

D.3 Mark5B data format

D.3.1 Data structure

Mark5B data consist of multiple frames. A frame of data consists of a header (16 bytes) and a data block (10000 bytes).




Figure D.17. Data structure of Mark5B format data.

D.3.2 Mark5B header format

Fig.D.18 shows Mark5B header format (16 bytes).

D.3.3 Mark5B data block

Data block of Mark5B format consists of 10000-byte data, and it is shown as figures below by using the unit of “bit-stream”, where bit-stream is the number of bits representing sampled data at a time. There are 6 kinds of bit-stream, such as, 2, 4, 8, 16, and 32. It is expressed as $\text{bit-stream} = nk$ where n is the number of channels and k is the number of AD bits.

bit	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
W0	Sync Pattern : '0xABADDEED'																															
W1	User-specified																T	Frame # within second (starting at 0)														
W2	VLBA BCD Time code word 1 ('JJJSSSS')																															
W3	VLBA BCD Time code word 2 ('.SSSS')																CRC 16bit															

T 1: TVG data

Figure D.18. Mark5B header format

Bit31	1 bit-stream data																														Bit0
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

Figure D.19. Mark5B data block for 1 bit-stream data. The number in a cell denotes sampling # that lines up in order of a sampling. This format corresponds to 1CH×1-bit AD data.

Bit31	2 bit-stream data																Bit0														
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																

Figure D.20. Mark5B data block for 2 bit-stream data. This format corresponds to 1CH×2-bit AD or 2CH×1-bit AD data.

Bit31	4 bit-stream data								Bit0																							
7	6	5	4	3	2	1	0																									

Figure D.21. Mark5B data block for 4 bit-stream data. This format corresponds to 4CH×1-bit AD, 2CH×2-bit AD data, and so on.

Bit31	8 bit-stream data				Bit0																											
3	2	1	0																													

Figure D.22. Mark5B data block for 8 bit-stream data. This format corresponds to 8CH×1-bit AD, 4CH×2-bit AD data, and so on.

Bit31	16 bit-stream data		Bit0																													
1	0																															

Figure D.23. Mark5B data block for 16 bit-stream data. This format corresponds to 16CH×1-bit AD, 8CH×2-bit AD data, and so on.

Bit31	32 bit-stream data				Bit0																											
0																																

Figure D.24. Mark5B data block for 32 bit-stream data. This format corresponds to 16CH×2-bit AD and so on.

D.4 VDIF data format

D.4.1 Data structure

VDIF(VLBI Data Interchange Format) data consist of stream of data frames. Each frame contains a header and a data block. The header consists of 32 bytes; first 16-byte data contain time information, etc., and rest is an extended user block (16 bytes). At present time, two formats (EDV #1 and #2) are defined for the extended user block.




Figure D.25. Data structure of VDIF format data.

D.4.2 VDI header format

Common specifications

Fig.D.26 shows VDIF header format (32 bytes).

bit	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																																														
W0	I	L	Seconds from reference epoch																																																																											
W1	Un-assign	Ref Epoch: Half year counter		Data Frame # within second																																																																										
W2	Version Number	$\log_2(\#chns)$		Data Frame length (units of 8bytes)																																																																										
W3	C	bits/sample-1		Thread ID for multi-stream (0-1023)										Station ID																																																																
W4	Extended User Data Version Number			Extended User Data																																																																										
W5	Extended User Data																																																																													
W6	Extended User Data																																																																													
W7	Extended User Data																																																																													

I= Invalid Flag

L= Legacy mode 0: standard 32-byte VDIF header 1: legacy header-length (16-byte) mode

C: data type 0: real data, 1: complex data

Figure D.26. VDIF header format

EDV#1 specified by NICT

Fig.D.27 shows the extended header format EDV#1 specified by NICT.

EDV#3 for VLBA, VLA, GBT

Fig.D.28 shows the extended header format EDV#3 for VLBA, VLA, GBT.

D.4.3 VDIF data block

Examples of single channel data

	bit	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																	
W0	I	L	Seconds from reference epoch																																															
W1	Un-assign	Ref Epoch: Half year counter		Data Frame # within second																																														
W2	Version Number	$\log_2(\# \text{chns})$		Data Frame length (units of 8bytes)																																														
W3	C	bits/sample-1		Thread ID for multi-stream (0-1023)										Station ID																																				
W4	Extended User Data Version Number					U	Sampling Rate (kHz or MHz)																																											
W5	Sync Pattern : '0xACABFEED'																																																	
W6	DAS/Station Name (8 bytes)																																																	
W7																																																		

U: units of sampling rate 0: kHz, 1: MHz

Figure D.27. VDIF header format (EDV#1 specified by NICT)

Bit31	real 1 bit/sample																														Bit0
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

Figure D.29. VDIF data block for 1CH×1-bit AD data. The number in a cell denotes sampling # that lines up in order of a sampling.

Bit31	real 2 bits/sample																													Bit0
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0															

Figure D.30. VDIF data block for 1CH×2-bit AD data.

Bit31	complex 1 bit/sample																													Bit0	
15Q	15I	14Q	14I	13Q	13I	12Q	12I	11Q	11I	10Q	10I	9Q	9I	8Q	8I	7Q	7I	6Q	6I	5Q	5I	4Q	4I	3Q	3I	2Q	2I	1Q	1I	0Q	0I

Figure D.31. VDIF data block for complex 1CH×1-bit AD data.

Bit31	complex 2 bits/sample																													Bit0
7Q	7I	6Q	6I	5Q	5I	4Q	4I	3Q	3I	2Q	2I	1Q	1I	0Q	0I															

Figure D.32. VDIF data block for complex 1CH×2-bit AD data.

Examples of multiple channel data

Bit31	real 16ch X 1 bit/sample																													Bit0	
CH16	CH15	CH14	CH13	CH12	CH11	CH10	CH9	CH8	CH7	CH6	CH5	CH4	CH3	CH2	CH1	CH16	CH15	CH14	CH13	CH12	CH11	CH10	CH9	CH8	CH7	CH6	CH5	CH4	CH3	CH2	CH1

Figure D.33. VDIF data block for 16CH×1-bit AD data.

bit	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																													
W0	I	L	Seconds from reference epoch																																																										
W1	Un-assign	Ref Epoch: Half year counter		Data Frame # within second																																																									
W2	Version Number	$\log_2(\# \text{chns})$		Data Frame length (units of 8bytes)																																																									
W3	C	bits/sample-1		Thread ID for multi-stream (0-1023)																		Station ID																																							
W4	Extended User Data Version Number					U	Sampling Rate (kHz or MHz)																																																						
W5	Sync Pattern : '0xACABFEED'																																																												
W6	LOIF Frequency Tuning Word, unsigned int - # of Hz																																																												
W7	Un-assigned	DBE unit		IF	Sub Band	ESB	Major Rev		Minor Rev		Personality Type																																																		

U: units of sampling rate 0: kHz, 1: MHz
 ESB: Electronic Side Band (1: upper, 0: lower)
 Personality Type: x00: RFBG, x80: DDC Mark5B, x81: DDC complex, x82: DDC VDIF

Figure D.28. DIF header format (EDV#3 for VLBA, VLA, GBT)

Bit31	real 16ch X 2bits/sample																Bit0									
CH16	CH15	CH14	CH13	CH12	CH11	CH10	CH9	CH8	CH7	CH6	CH5	CH4	CH3	CH2	CH1											

Figure D.34. VDIF data block for 16CH×2-bit AD data.

Bit31	complex 16ch X 2bits/sample																Bit0										
CH8Q	CH8I	CH7Q	CH7I	CH6Q	CH6I	CH5Q	CH5I	CH4Q	CH4I	CH3Q	CH3I	CH2Q	CH2I	CH1Q	CH1I												
CH16Q	CH16I	CH15Q	CH15I	CH14Q	CH14I	CH13Q	CH13I	CH12Q	CH12I	CH11Q	CH11I	CH10Q	CH10I	CH9Q	CH9I												

Figure D.35. VDIF data block for complex 16CH×2-bit AD data.

E How to install PG PLOT

E.1 by “apt-get” (for Ubuntu 14.04)

If software package is available, we can install PG PLOT by using “apt-get” command as

```
sudo apt-get install pgplot5
```

E.2 step by step

1. download

```
download pgplot5.2.tar.gz from ftp://ftp.astro.caltech.edu/pub/pgplot/pgplot5.2.tar.gz  
copy pgplot5.2.tar.gz to /usr/local/src
```

2. decompress

```
cd /usr/local/src
```

```
gunzip -c pgplot5.2.tar.gz | tar xvof -
```

or

```
tar xvzf pgplot5.2.tar.gz
```

/usr/local/src/pgplot and subdirectories are generated by decompression

3. create the install directory

```
mkdir /usr/local/pgplot
```

4. select driver

```
cd /usr/local/pgplot
```

```
cp /usr/local/src/pgplot/drivers.list .
```

remove “!” at driver name

```
vi drivers.list
```

drivers recommended are

```
/NULL /PS /VPS /CPS /VCPS /XWINDOW /XSERVE
```

5. create the makefile

```
cd /usr/local/pgplot
```

```
/usr/local/src/pgplot/makemake /usr/local/src/pgplot linux g77-gcc
```

6. execute “make”

```
make
```

```
make cpg
```

```
make clean
```

now there are files as follows in the directory

```
cpgdemo gexec.f libcpgplot.a pgdemo1 pgxwin_server cpgplot.h grfont.dat libpgplot.a pgplot.doc rgb.txt  
drivers.list grpckg1.inc makefile pgplot.inc
```

libpgplot.so

7. copy libraries and include file to standard directory

```
cp libcpgplot.a /usr/lib
```

```
cp libpgplot.a /usr/lib
```

```
cp cpgplot.h /usr/include
```

```
cp libpgplot.so /usr/lib
```

8. execution of demonstration programs

set environmental variables as follows

```
csh : setenv PG PLOT_DIR /usr/local/pgplot/
```

```
sh : PG PLOT_DIR=“/usr/local/pgplot/”; export PG PLOT_DIR
```

or

```
export PG PLOT_DIR=/usr/local/pgplot/
```

As for /XWINDOW or /XSERVE, set as follows

```
csh : setenv DISPLAY IP_address(or host_name):0.0
```

```
sh : export DISPLAY=IP_address(or host_name):0.0
execute demo programs
pgdemo1 (FORTRAN demo)
or
cpgdemo (C demo)
```

9. How to compile C program

compile by either Method 1 or Method 2 as follows, where test source code is test.c

Method 1

```
f77 -o test test.c -lcpgplot -lpgplot -L/usr/X11R6/lib -lX11 -lm
(Note: use Fortran compiler)
```

Method 2

```
cc -O2 -c -I. test.c
f77 -o test test.o -lcpgplot -lpgplot -L/usr/X11R6/lib -lX11 -lm
```

F How to install FFTW

1. download

get the latest version of FFTW from <http://www.fftw.org/>
(latest version is <ftp://ftp.fftw.org/pub/fftw/fftw-3.3.6-pl1.tar.gz> as of March 2, 2017)
copy fftw-3.3.6-pl1.tar.gz to /usr/local/src

2. decompress

```
cd /usr/local/src  
tar xvzf fftw-3.X.X.tar.gz
```

/usr/local/src/fftw-3.X.X and subdirectories are generated by decompression

3. generate the makefile

```
cd /usr/local/src/fftw-3.X.X  
.configure
```

4. execute “make”

```
make
```

/usr/local/src/fftw-3.X.X/.libs will be created

5. set up library and include file to the standard directory

```
make install
```

by this execution, libfftw3.a and libfftw3.la are copied to /usr/local/lib
fftw3.h is copied to /usr/local/include

6. How to compile C program

use “-lfftw3 -lm” at linkage
and set include file directory and library directory as follows
-I/usr/local/include
-L/usr/local/lib

see <http://www.fftw.org/> for details